



- Thread nipple into center hole of mounting strip about 4 complete turns. Lock in place with washer and hex nut. This nipple should extend long enough to protrud through the canopy when it is mounted.
- Fasten mounting strip onto wall outlet box using two outlet box screws.
- Connect the wires from the fixture to the power supply wires from outlet box.
 - Twist together white wire from the fixture with white wire from outlet box. Cover with wire connectors.
 - Twist together black wire from the fixture with black wire from outlet box. Cover with wire connectors.
 - Wrap the ground wires from fixture and the outlet box around the ground screw located on the mounting strip. Tighten the green ground screw to the mounting strip.
- Pass the bracket through the nipple. Secure cap nut onto the nipple on the mounting strip until the fixture body is held firmly to the wall.
- Install the bulb (not included) into socket. Do not use greater than 100-watt bulb.

NOTE: Carefully remove the fixture from the carton. Check that all parts shown in package parts 1 and parts 2 are included. Be carefully not to misplace any of the screws or wire connectors, which are needed for installing the fixture.

PACKAGE PART

Wire connector	2	Cap Nut	1
Green ground screw	1		
Outlet box screw	2		
Mounting strip	1		
3/8" Nut	1		
3/8" Nipple	1		
Washer	1		

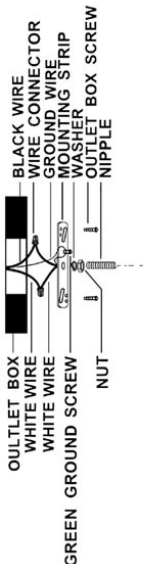

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>