


ASSEMBLY INSTRUCTION

- Thread nipple into center hole of mounting strip about 4 complete turns. Lock in place with washer and hex nut.
 This nipple should extend long enough to protrud through the canopy when it is mounted.
- 2. Fasten mounting strip onto wall outlet box using two outlet box screws.
- 3. Connect the wires from the fixture to the power supply wires from outlet box.
 - A. Twist together white wire from the fixture with white wire from outlet box. Cover with wire connector.
 - B. Twist together black wire from the fixture with black wire from outlet box. Cover with wire connector.
 - C. Wrap the ground wires from fixture and the outlet box around the ground screw located on the mounting strip.
 Tighten the green ground screw to the mounting strip.
- 4. Pass the bracket through the nipple. Screw cap nut onto the nipple on the mounting strip until the fixture body is held firmly to the wall.
- 5. Install the bulb (not included) into socket. Do not use greater than 60-watt bulb.
- 6. Thread 5/32" nipple into strip on the bracket.
- 7. Carefully unpack the glass from box, Set the glass over 5/32" nipple, and secure by tightenting with ball nut.

NOTE: Carefully remove the fixture from the carton. Check that all parts shown in package parts 1 and parts 2 are included. Be carefully not to misplace any of the screws or wire connectors, which are needed for installing the fixture.

PACKAGE PART

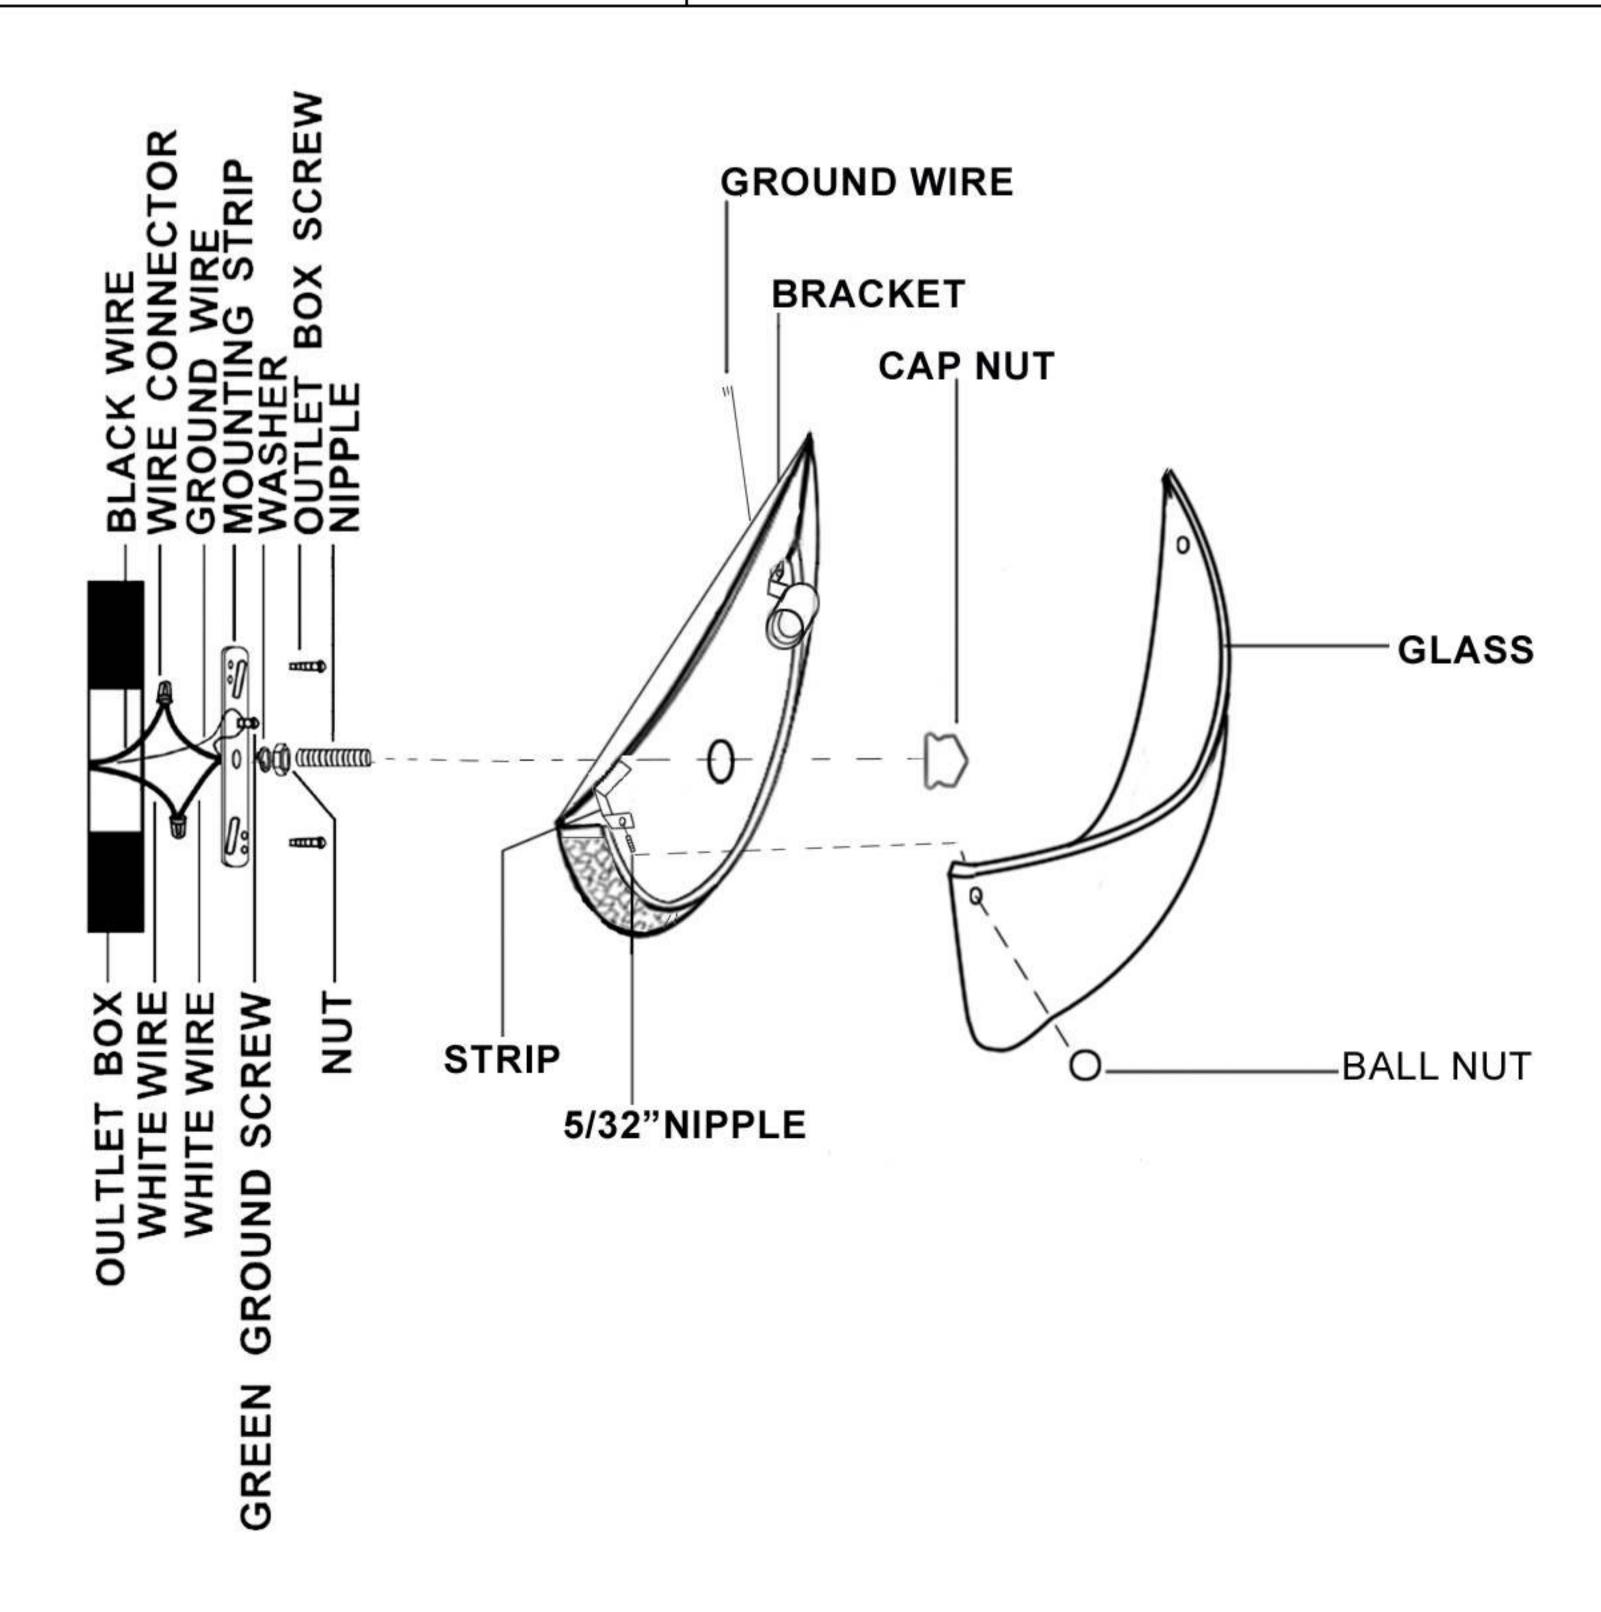

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com