





Stainless



3000 SERIES

Overlay

FEATURES

PERFORMANCE

U-Select[™] Control: Integrated OLED display with intuitive user interface ergonomically located on top of door

- Digitally controlled dual-zone convection cooling system
- Refrigeration capacity of 7.1 cubic feet
- Capacities: 120 12-oz bottles or 254 12-oz cans
- Beverage Mode: 34°-65°F,
- Sabbath / Black-Out mode
- UL Residential Listing



Adjustment and configuration of shelves allows for storing taller items

INTERIOR / EXTERIOR

INTEGRATION

• Six adjustable tempered glass shelves with 11 positions optimize storage space for a wide variety of options

- Black interior with LED theater lighting optimizes elegant display
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door provides protection from harmful UV rays and added insulating energy efficiency
- · Robust, concealed and covered hinges with built-in door stop and closer
- Convenient crisper drawer comes in handy to store smaller items and keep them fresh




Dual Zone System featured in 3036RRGL

• Standard commercial stainless steel handle is interchangeable with professional handle option

- Adjustable toe-kick front to back and up and down allows for seamless installation
- Front adjustable rear leveling legs greatly eases installation
- Allow a 2-1/2" clearance on hinged side for 90° door opening when installed adjacent to a wall (for stainless steel model)
- No additional clearance around sides, top or rear of unit is needed for ventilation

8900 NORTH 55TH STREET | MILWAUKEE, WISCONSIN 53223 | 414.354.0300 | FAX 414.354.7905 | U-LINE.COM

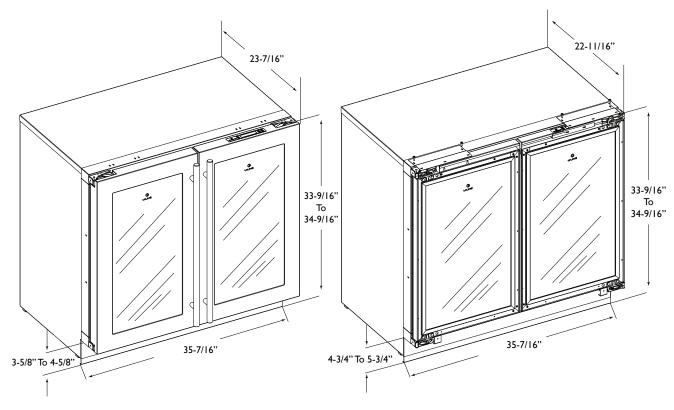

3036RRGLS Stainless Model

3036RRGLOL Overlay Model

DIMENSIONS AND SPECIFICATIONS

OVERALL DIMENSIONS

Height 33-9/16" (85.2) Width 35-7/16" (90) Depth 23-7/16" (60) With stainless steel handle 25-5/16" (64.3)

Shipping weight:


Stainless model 214 lbs (97 kg) Overlay model 204 lbs (92.5 kg)


Running amps 2.4

Amps pertain to voltage rating 110/115 Volt, 60 Hz

Capacities:

7.1 Cu Ft Refrigerator volume





Please visit www.u-line.com for installation guide.

All specifications are subject to change without notice.



Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com