

EXI 3965  
**Uniden®**



digital spread spectrum  
**900MHz cordless**  
WITH INTERCHANGEABLE FACE PLATES

owner's manual

**[www.uniden.com](http://www.uniden.com)**

# Contents

|   |    |  |    |
|---|----|--|----|
| Welcome / Features / Terminology<br>Controls and Functions            | 3  | Intercom/page Feature                        | 29 |
| <b>Getting Started</b>  |    | Call Transfer Feature                        | 30 |
| Checking the package contents   | 5  | Chain Dialing                                | 30 |
| Setting up the phone  | 6  | Mute (handset/base)                          | 31 |
| <b>Caller ID Options</b>  |    | Selecting a different channel                | 31 |
| Setting caller ID options   | 12 | Tone Dialing Switch-over                     | 31 |
| Ringer volume setup   | 14 | <b>Caller ID Features</b>                    |    |
| Handset ringer tone setting   | 14 | Caller ID                                    | 32 |
| Distinctive ringer setup  | 15 | When the telephone rings                     | 32 |
| Selecting a language  | 16 | Viewing the Caller ID Message list           | 33 |
| <b>Basics</b>   |    | Deleting information from the Caller ID list | 34 |
| Making and receiving calls  | 17 | Using the Caller ID list                     | 35 |
| Redialing a call  | 19 | Using "Caller ID on call waiting" service    | 37 |
| Traveling out-of-range  | 20 | Call waiting deluxe features                 | 38 |
| <b>Memory Dialing</b>   |    | <b>Additional Information</b>                |    |
| Storing phone numbers, names and<br>distinctive ring                  | 21 | Changing the digital security code           | 39 |
| Making calls with memory dialing                                      | 23 | Changing the face plate                      | 40 |
| Editing or erasing a stored name,<br>phone number or distinctive ring | 25 | Headset installation                         | 40 |
| <b>Telephone Features</b>   |    | Installing the beltclip                      | 41 |
| 3-way conferencing  | 28 | Maintenance                                  | 41 |
|   |    | Note on power sources                        | 42 |
|   |    | Troubleshooting                              | 43 |
|   |    | General information                          | 44 |
|   |    | Precautions & Warranty                       | 45 |
|   |    | Index  | 47 |

## Welcome

Congratulations on your purchase of the Uniden EXI3965 cordless telephone. This phone is designed and engineered to exacting standards for reliability, long life and outstanding performance.

**Note: Some illustrations in this manual may differ from the actual unit for explanation purposes.**

## Features

- 900 MHz Extended Range
- 2-way Intercom
- Caller ID and Call Waiting Caller ID
- 70 Number Caller ID Memory
- 40 Number Memory Dialing (30 Handset & 10 Base)
- 32 Digit Redial
- Trilingual Language, option
- Flash and Pause
- Tone/Pulse Dialing
- 10 Day Standby Battery Life
- 6 Hour Talk Time
- Handset Earpiece and Ringer Volume Control
- Speakerphone
- Distinctive Ring, options


## Terminology


**AutoTalk™** allows you to answer a call by just removing the handset from the base.

**AutoStandby™** allows you to hang up by simply returning the handset to the base.

**Random Code™** protects you against misbilled calls, which might result from your phone being activated by other equipment. *Random Code* digital security automatically selects one of approx. 65,000 digital security codes for the handset and base. Also, **AutoSecure™** electronically locks your phone when the handset is in the base.

**Digital Spread Spectrum Technology** utilizes a “wider frequency band” vs. a “single narrow band” used in standard digital transmissions. The result is a more secure conversation with the clarity of digital sound, extended range, and minimal interference from other cordless phones.

**Standby Mode** - The handset is not in use, is off of the base, and  has not been pressed. A dial tone is not present and the display is blank.

**Talk Mode** - The handset is not on the base and  has been pressed enabling a dial tone. Talk appears on the display.


**Be sure to visit our web site: [www.uniden.com](http://www.uniden.com)**

Uniden® is a registered trademark of Uniden America Corporation.


AutoTalk, AutoStandby, UltraClear Plus, Random Code, and AutoSecure are trademarks of Uniden America Corporation.

Download from [www.Somanuals.com](http://www.Somanuals.com). All Manuals Search And Download.

# Controls and Functions

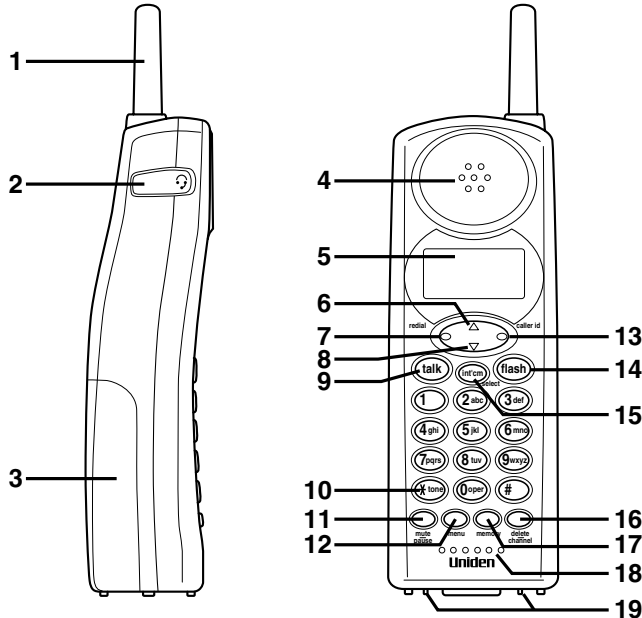

1. Handset Antenna
2. Headset Jack Cover
3. Handset Battery Compartment
4. Handset Earpiece
5. LCD Display
6. Volume Up Key
7. Redial Key
8. Volume Down Key
9. Talk Key
10. ✖/Tone Key
11. Mute/Pause Key
12. Menu Key
13. Caller ID Key
14. Flash Key
15. Intercom/Select Key
16. Delete/Channel Key
17. Memory Key
18. Handset Microphone
19. Handset Charging Contacts

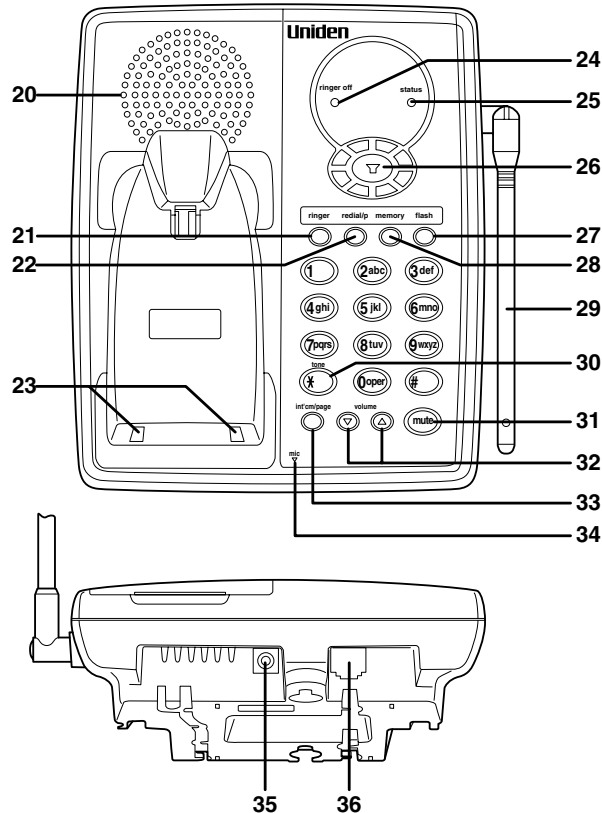


- 20. Base Speaker
- 21. Ringer Key
- 22. Redial/Pause Key
- 23. Base Charging Contacts
- 24. Ringer Off LED
- 25. Status LED
- 26.  $\nabla$  (Talk Key)
- 27. Flash Key
- 28. Memory Key
- 29. Base Antenna
- 30.  $\star$ /Tone Key
- 31. Mute Key
- 32. Base Speaker Volume Keys
- 33. Intercom/Page Key
- 34. Base Microphone
- 35. DC Power Input
- 36. Phone Jack

#### [ 4 ] CONTROLS AND FUNCTIONS

# Checking the Package Contents


Make sure you have received the following items in the package.  
If any of these items are missing or damaged, contact the Uniden Parts Department (see below).




• Base unit




• Handset



• AC adapter



• Rechargeable battery pack



• Telephone line cord



• Beltclip



• Face plate

- This Owner's Manual
- Quick Reference Guide
- Other Printed Material

## Uniden Parts Department

(800) 554-3988

Hours: M-F 7:00 AM to 5:00 PM CST.

Be sure to visit our web site: [www.uniden.com](http://www.uniden.com)


# Setting up the Phone

## Do the following steps:

- A. Choose the best location
- B. Install the battery pack
- C. Connect the base unit
- D. Choose the dialing mode

### A. Choose the best location

Before choosing a location for your new phone, read the **INSTALLATION CONSIDERATIONS** included in the **PRECAUTIONS AND IMPORTANT SAFETY INSTRUCTIONS** brochure. Here are some important guidelines you should consider:

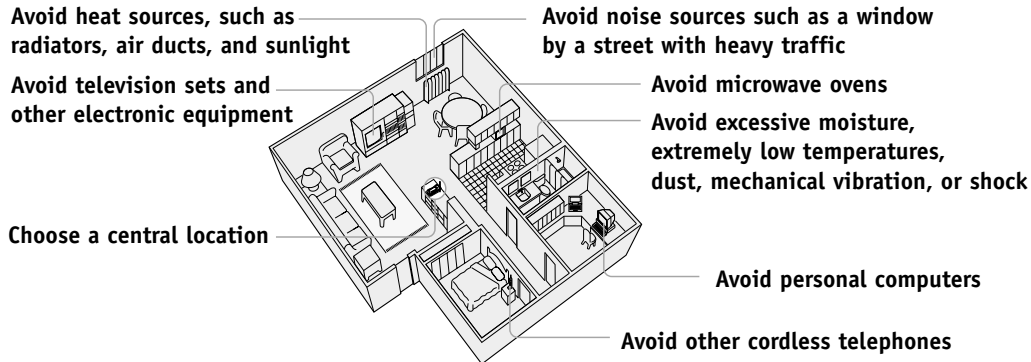


- The location should be close to both a phone jack and a continuous power outlet that is not switchable.
- Keep the base and handset away from sources of electrical noise such as motors, microwave ovens, and fluorescent lighting.
- Be sure there is sufficient space to raise the base antenna to a vertical position.
- The base can be placed on a flat surface such as desk, tabletop, or mounted on a standard wall plate.

## [ 6 ] GETTING STARTED



## B. Install the battery pack

Place the handset on the base unit and charge the battery pack for at least 15-20 hours before plugging the phone line into your phone.

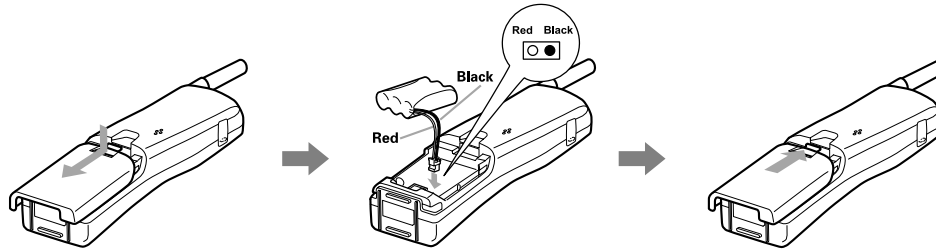

### Battery use time (per charge)

From fully charged:

- 6 hours continuous use.
- 10 days when the handset is in the standby mode.

### Low battery alert

If the phone is not in use, "Low Battery" appears on the LCD and none of the keys will operate. If the phone is in use, "Low Battery" flashes and the handset beeps. Complete your conversation as quickly as possible and return the handset to the base unit for charging.

Low Battery

note

- Use only the Uniden Battery supplied with your phone. Replacement batteries are also available through the Uniden Parts Department (See page 44) or [www.uniden.com](http://www.uniden.com)
- Even when the battery pack is not being used, it will gradually discharge over a long period of time. For optimum performance, be sure to return the handset to the base unit after each telephone call.
- If you must replace the battery pack during a telephone call, complete the replacement of the battery pack within 30 seconds, and you can return to the original call.



Place the power cord so that it does not create a trip hazard or where it could become chafed and create a fire or electrical hazard.




The handset can be placed face up or face down in the base for charging.



If your telephone outlet isn't modular, contact your telephone company for assistance.

## C. Connect the base unit


- 1 Connect the AC adapter to the **DC IN 9V** jack and a standard 120V AC wall outlet.
- 2 Set the base on a desk or tabletop, Pull back stand out for base support and place the handset on the base unit as shown.

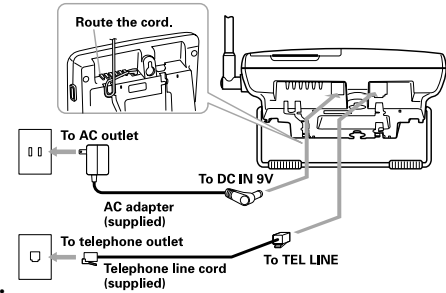

- 3 Raise the antenna to a vertical position.
- 4 Make sure the **status** LED lights. If the LED does not light, check to see that the AC adapter is plugged in.




- Use only the supplied AC adapter. Do not use any other AC adapter.
- Connect the AC adapter to a continuous power supply.



- 5 Connect the telephone line cord to the **TEL LINE** jack and a telephone outlet once the handset is fully charged.



**Modular**



## D. Choose the dialing mode

Most phone systems use tone dialing, which sends DTMF tones through the phone lines. However, some phone systems still use pulse dialing such as in rural areas. The default setting is tone dialing. Depending on your dialing system, set the mode as follows:

### Base Setting only

- 1 Press and hold **flash** until you hear a confirmation tone.
  - 2 To set the dial mode for pulse dialing, press **#**. Or to set the dial mode for tone dialing, press **\*tone**. A confirmation tone sounds to indicate the setting is complete.
- If you are not sure of your dialing system, set for tone dialing. Make a trial call. If the call connects, leave the setting as is, otherwise set for pulse dialing.
  - If your phone system requires pulse dialing and you need to send the DTMF tones for certain situations during a call, you may “switch-over” to tone dialing (refer to “Tone Dialing Switch-over” on page 31).



note


Make sure your battery pack is fully charged before choosing the dial mode.




DO NOT use an outlet controlled by a wall switch.

## Mounting the Base Unit on a Wall

### Setting the handset retainer clip for wall mounting


- 1 On the base unit, pull the handset retainer clip out of the slot and rotate it clockwise 180 degrees.
- 2 Flip the retainer clip from front to back. Slide it back into the slot so that the lip of the retainer is up and the  is down. The retainer holds the handset in place.



### Standard wall plate mounting

This phone can be mounted on any standard wall plate.

- 1 Route the AC adapter cord inside the molded wiring channel as shown.
- 2 Plug the telephone line cord into the **TEL LINE** jack. Route the cord inside the molded wiring channel as shown.
- 3 Raise the antenna to a vertical position.
- 4 Align the mounting slots on the base with the mounting posts on the wall. Then push in and down until the phone is firmly seated.

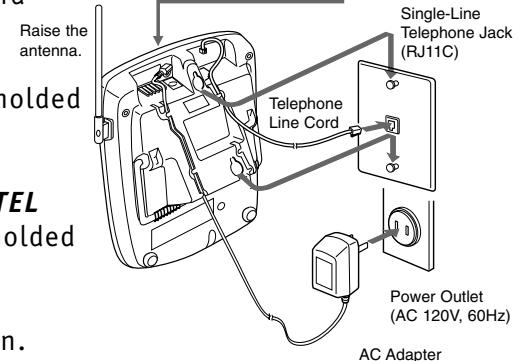

## Direct wall mounting


If you don't have a standard wall plate, you can mount your phone directly to the wall. Before doing this, consider the following:

- Avoid electrical cables, pipes, or other items behind the mounting location that could cause a hazard when inserting screws into the wall.
- Try to mount your phone within 5 feet of a working phone jack to avoid excessive cord lengths.
- Make sure the wall material is capable of supporting the weight of the base and handset.
- Use #10 screws (minimum length of 1-3/8 inches) with anchoring devices suitable for the wall material where the base unit will be placed.

**1** Insert two mounting screws into the wall, (with their appropriate anchoring device), 3-15/16 inches apart. Allow about 1/8 of an inch between the wall and screw heads for mounting the phone.

**2** Set the retainer clip if necessary.

**3** Refer to steps 1 through 4 on page 10 to mount the telephone.






You must subscribe to Caller ID on Call Waiting in order to use this feature.

## Setting Caller ID Options


There are three Caller ID setup options available;



**AutoTalk™** allows you to answer the phone without pressing the **(talk)** button. If the phone rings when AutoTalk is on, simply remove the handset from the base and the phone automatically answers the call. Or if the handset is not on the base, press any key to answer the call. If the phone rings when AutoTalk is off, you must press **(talk)** to answer the call.




**Caller ID on Call Waiting (CIDCW)** performs the same as regular Caller ID on a call waiting number. Call waiting options allow you to handle call waiting calls in seven different ways. (See page 38.)



**You must subscribe to Call Waiting Deluxe from your phone company in order to use this feature.**




To change your Caller ID options:

- 1 Press **(menu)** . The following screen appears.
- 2 Press **(v)** to move the pointer to "Caller ID Setup". Then press **(int'cm/select)** .
- 3 Use **(u)** or **(v)** to move the pointer to the selection that you would like to change, then press **(int'cm/select)** .










- 4 Use  and  to move the pointer between "Auto Talk On" or "Auto Talk Off". For "CIDCW", choose "CIDCW On", "CW Options" or "CIDCW Off" depending upon the type of service to which you subscribe.



Press  to make your selections and a confirmation tone will sound. To complete the setting, make sure to return the handset to the base.

## Entering Your Area Code

If you enter a 3-digit area code number in the "Area Code" option, your local area code does not appear in Caller ID messages. For calls received from outside your local area code, you will see a full 10-digit number.

- 1 When the phone is in the standby mode, press .
- 2 Press  to move the pointer to "Caller ID Setup". Then press  to select. The Caller ID setting screens appears.
- 3 Use  to move the pointer to the "Area Code", then press .
- 4 Use the number keypad (0 to 9) to enter 3-digit area code.
- 5 Press , and a confirmation tone will sound.



- If your calling area requires 10-digit dialing, do not program this option.
- When the area code has already been stored in memory, the stored area code will be displayed. To change it, use the  and number keypad to enter the new area code.
- To complete the setting, press  then return the handset to the base unit.



When you select "Ringer Off", <Ringer Off> appears on the handset display.

## Ringer Volume Setup

### Handset ringer volume setting

- 1 When the phone is in the standby mode, press **menu** .
- 2 Press **▼** to move the pointer to "Ringer Volume". Then press **int'cm/select** to select.
- 3 Press **▲** or **▼** to move the pointer through the ring settings.
- 4 Press **int'cm/select** to complete the ringer volume setting and you will hear the confirmation tone. Then the handset returns to the menu screen.

```
Ringer High
Ringer Low
Ringer Off
```

### Base ringer volume setting

- 1 When the phone is in standby mode, press **ringer** .
- 2 By pressing **ringer** multiple times, the ringer options (high, low, off) will sound.

If "Ringer Off" is selected the ringer off LED will light.

## Handset Ringer Tone Setting


- 1 When the phone is in the standby mode, press **menu** .
- 2 Press **▼** to move the pointer to "Ringer Tones".



Then press **(int'cm/select)** .

You can choose from 8 ringers or 10 melodies:

- Ringer [A - H]
- Melodies [Home Sweet Home, Sweetheart, Aura Lee, Beethovens #9, When Irish Eyes, Merry Christmas, Old MacDonald, Twinkle Twinkle, For Elise, Aloha Oe]



```
Ringer A
Ringer B
Ringer C
```

3 Press **(▲)** or **(▼)** to move the pointer and you will hear the ringer or the melody as you scroll through the options.

4 Press **(int'cm/select)** and you will hear a confirmation tone.


## Distinctive Ringer Setup

If you have set multiple memory locations with distinctive rings, switching the setting to “Distinctive Off” will result in no distinctive ringing. All incoming calls will have a normal ring tone. Switching to “Distinctive On” will activate all programmed distinctive ring memory locations.

1 Press **(menu)** . Then press **(▼)** to move the pointer to “Distinct. Ring”.

2 Press **(int'cm/select)** to select “Distinct.Ring”.

3 Use **(▲)** or **(▼)** to select “Distinctive On” or “Distinctive Off”.



```
Distinctive On
Distinctive Off
```

4 Press **(int'cm/select)** and a confirmation tone will sound.




See **MEMORY DIALING** for more details regarding the Distictive Ring setup on page 22.

## Selecting a Language

1 When the phone is in the standby mode, press **menu** .

2 Press **▼** to move the pointer to "Language".

Then press **int'cm/select** to select. The Language setting screen appears.






```
#English
French
Spanish
```

3 Use **▲** or **▼** to move the pointer to the desired selection.

Then press **int'cm/select** to complete setting and a confirmation tone will sound.

# Making and Receiving Calls

|                  | From the Handset  | From the Base  |
|------------------|---|--|
| To answer a call | <p><b>Handset On the Base</b><br/>Pick up the Handset (Auto Talk on) or press <b>(talk)</b>.</p> <p><b>Handset Off the Base</b><br/>Press <b>(talk)</b>.</p>                                  | Press  (talk).  |
| To make a call   | <p>1) Press <b>(talk)</b>.</p> <p>2) Listen for the dial tone.</p> <p>3) Dial the number.</p> <p style="text-align: center;">OR</p> <p>1) Dial the number.</p> <p>2) Press <b>(talk)</b>.</p> | <p>1) Press  (talk).</p> <p>2) Listen for the dial tone.</p> <p>3) Dial the number.</p> |
| To hang up       | Press <b>(talk)</b> , or return the handset to the base (Auto Standby).   | Press  (talk).  |





- The base microphone is located under the phone. Position yourself as near to the base as possible and speak clearly.
- Press **(delete/channel)** if you enter a wrong number. To delete all the numbers that you have entered, press and hold **(delete/channel)** until the display clears.
- You must press a key within 20 seconds or the phone will return to standby.













## Call Waiting

**Note: You must subscribe to Call Waiting service to use this feature.**

When a call is received during a telephone call already in progress, press *(flash)* to switch to the new call. If you also subscribe to Call Waiting on Caller ID, you will see the name and number of the caller in call waiting. (See page 37.)

## Adjusting Earpiece Volume

Pressing  or  during a call will change the earpiece volume. This setting will remain in effect after the telephone call has ended.

Volume   Volume   Volume   Volume  
Maximum   High   Medium   Low

## Base Volume

Pressing  or  during a call will change the volume of the base.


# Redialing a Call

The last three phone numbers dialed can be quickly redialed.

## Redialing from Standby Mode


- 1 Press **(redial)**. The phone number that was last dialed appears on the display.
- 2 Press **(redial)** again. Each press of **(redial)** will display one of the last three numbers dialed.
- 3 Press **(talk)**. "Talk" appears on the display, then the volume setting is displayed.
- 4 Then the selected number is dialed. After about 5 seconds, the call-time display appears.
- 5 To hang up, press **(talk)** or return the handset to the base. The call-time will be displayed for about 5 seconds.

Most recent

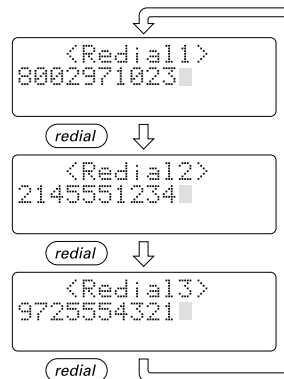




## Redial from Talk Mode


- 1 Press **(talk)**. "Talk" and the volume setting appear on the display.
- 2 Press **(redial)**. The last number dialed will be displayed and redialed.
- 3 To hang up, press **(talk)** or return the handset to the base. The call-time will be displayed for about 5 seconds.



- If the number exceeds 32 digits, only the first 32 digits are retained for redial.
- Press and hold **(delete/channel)** to delete the displayed redial number.
- Only the last number dialed can be accessed after **(talk)** has been pressed.

## From the Base

- 1 To call the last number dialed from the base, press  (talk key).
- 2 Press . The last number dialed from the base is redialed.
- 3 To hang up, press  (talk key).

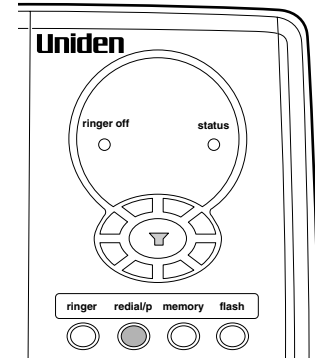

## Traveling Out-of-Range

During a call, as you begin to move your handset too far from your base unit, noise increases. If you pass the range limits of the base unit, your call will terminate within 30 seconds.

# Storing Phone Numbers, Names and Distinctive Rings

Memory Dialing allows you to dial a number using just a few key strokes. Your EXI3965 stores up to 30 names/numbers in the handset plus 10 numbers in the base.

## With the handset

- 1 Press **(menu)**. The following screen appears.
- 2 Press **(int'cm/select)** to select "Memory Edit".
- 3 Press **(▲)**, **(▼)** to move pointer to memory location of your choice.  
or  
Press number keypad (0-3) for tens' digit and press number keypad (0-9) for ones' digit to select memory location. Press **(int'cm/select)** to select location.
- 4 "Store Name" appears on the display. Then use the number keypad to enter the name. Press **(caller id)** and **(redial)** to move back/forth between characters.

```


Memory Edit
Ringer Volume
Ringer Tones
  
```

```

Memory Edit
01▶
02
  
```

```

Store name
█
  
```

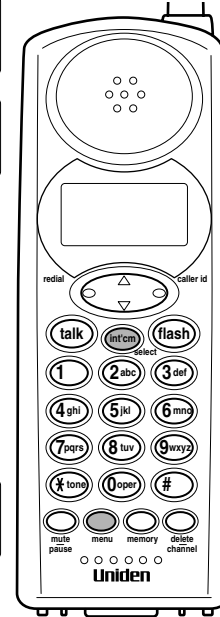

note

- In memory dialing operation, you must press a key within 20 seconds or the phone will return to standby. If you return the handset to the base, the phone will return to standby also.
- Press **(delete/channel)** to delete incorrect character, then enter the correct character. To delete all characters press and hold **(delete/channel)**.



- The pause feature is useful for long distance calling, credit card dialing, or sequences that require a pause between digits.
- “Distinctive Ring” allows user to preset memory locations with a designated ring tone. When an incoming call is received and the Caller ID information matches one of the 30 memory locations, the Distinctive Ring that has been stored for that particular caller will sound.

5 Press **int'cm/select** to store the name. Then “Store Number” appears on the display.

Store number

6 Press the number key pad to enter the phone number. Then press **int'cm/select** to store the numbers.

7 “Distinctive Ring” appears. Then press **▲** or **▼** to move the pointer to one of the Distinctive Ring options.

Distinctive Ring  
 No Selection  
 Ringer A

8 Press **int'cm/select** to complete setting. You will hear the confirmation tone.


If you choose not to store a “Distinctive Ring” for each memory location, simply select the “No Selection” option.

Memory04 stored

| keys         | Number of times key is pressed |   |   |   |   |   |         |   |   |
|--------------|--------------------------------|---|---|---|---|---|---------|---|---|
|              | 1                              | 2 | 3 | 4 | 5 | 6 | 7       | 8 | 9 |
| <b>1</b>     | 1                              |   |   |   |   |   |         |   |   |
| <b>2abc</b>  | A                              | B | C | a | b | c | 2       |   |   |
| <b>3def</b>  | D                              | E | F | d | e | f | 3       |   |   |
| <b>4ghi</b>  | G                              | H | I | g | h | i | 4       |   |   |
| <b>5jkl</b>  | J                              | K | L | j | k | l | 5       |   |   |
| <b>6mno</b>  | M                              | N | O | m | n | o | 6       |   |   |
| <b>7pqrs</b> | P                              | Q | R | S | P | q | r       | s | 7 |
| <b>8tuv</b>  | T                              | U | V | t | u | v | 8       |   |   |
| <b>9wxyz</b> | W                              | X | Y | Z | w | x | y       | z | 9 |
| <b>0</b>     | *                              | # | - | & | ( | ) | (blank) | 0 |   |



## With the Base



- 1 Press **memory** . (Status LED blinks.)
- 2 Dial the number you wish to store. (The phone number cannot exceed 20 digits.)
- 3 Press **memory** . Enter the memory location number (0-9) on the keypad. The **status** LED is no longer illuminated. A confirmation tone sounds and the number is stored.




- The 10 memory locations in the base are independent locations from the handset.
- The 10 memory locations are represented by the numbers 0-9 on the keypad. If you store a number in one of these locations, then attempt to store a different number in the same location later, the new number will overwrite the previous one.

# Making Calls with Memory Dialing

## Memory dialing from Standby Mode

### With the handset


- 1 Press **memory** . The handset displays your programmed memory locations.
- 2 Press **▲** and **▼** or enter a two-digit number (01 - 30) to select the memory location you would like to dial.
- 3 Press **talk** . "Talk" and the volume setting appear on the display. Then the displayed number is dialed.

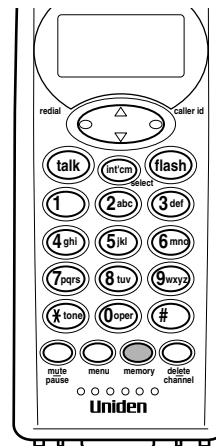

## Display a Programmed Number while in Memory Location List

Press **(caller id)** to review the details of a memory location.



Press **(redial)** to return to program name list.




Whenever you are using a menu screen, you must press a key within 20 seconds or the phone will return to standby.

## Memory dialing from Talk Mode


1 Press **(talk)**. "Talk" and the volume setting appear.




2 Press **(memory)**.



3 Enter a two-digit number (01 - 30) to select the memory location of the desired phone number. The selected phone number is displayed. Then the number is dialed.



## With the Base



1 Press **(talk key)**.

2 Press **(memory)**. Enter the memory location number (0-9) to dial the number.

# Editing or Erasing a Stored Name, Phone Number or Distinctive Ring

1 Press **(menu)** . The following screen appears.

2 Press **(int'cm/select)** to select "Memory Edit".

```
Memory Edit
Ringer Volume
Ringer Tones
```

3 Press **(▲)** , **(▼)** to scroll through memory locations.  
or

Press number keypad (0-3) for tens' digit and press number keypad (0-9) for ones' digit to select memory location. Then press **(int'cm/select)** to select location to be edited.

```
Memory Edit
01 Uniden CORP
02 JOHN DOE
```

4 Press **(▼)** or **(▲)** to select the desired function and press **(int'cm/select)** . To edit the stored data, select "Edit." To delete the data, select "Delete." To return to the previous screen, select "Go Back."

```
Edit Memory01
Delete Memory01
Go Back
```



To edit data, go to step a. To delete data, go to step b. (See page 26.)



note

To delete all characters press and hold **(delete/channel)** .


## a. Editing a stored Name, Phone Number or Distinctive Ring

- (1) Use the number keypad, *(delete/channel)*, *(redial)* and *(caller id)* to edit the name and numbers. Use ,  to scroll through distinctive ring list if you want to make a change.

```
Memory01 Stored
```

- (2) Press *(int'cm/select)* when all editing is complete and a confirmation tone sounds.

## b. Deleting the Stored Data

- (1) Press  to move the pointer to "Yes".

```
Delete Memory01?  
Yes  
#No
```


- (2) Press *(int'cm/select)* or *(delete/channel)*. There is a confirmation tone and the entry is deleted. The following screen appears.

```
Memory01 Deleted
```

- (3) After a few seconds the display returns to the "Memory Edit" screen. You may select another number to edit or press *(menu)* to return to standby.

```
Memory Edit  
01#  
02 JOHN DOE
```

## With the Base




- 1 Press **memory**. (Status LED blinks.)
- 2 Press **memory** again.
- 3 Enter the memory location number (0-9) of the number you wish to delete. The **status** LED is no longer illuminated. A confirmation tone indicates the number has been erased.

note


To edit the numbers that you have stored in the base, simply overwrite the existing number. Refer to "Storing Phone Numbers and Names with the Base" on page 23.




- Pressing the  on the base while dialing with the handset will set the 3-way conversation mode. Dialing is not affected.
- During a 3-way conversation, you can only dial from the handset.



## 3-way Conferencing

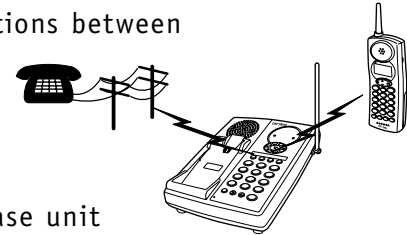The Uniden EXI3965 permits 3-way conversations between the handset, base and outside line.




### When speaking on the handset



- 1 Press  on the base unit to initiate the 3-way conversation.
- 2 To hang up, press  on the base. The handset will still be connected to the call.


### When speaking on the base





- 1 Press **talk** on the handset to initiate the 3-way conversation.
- 2 To hang up, return the handset to the base, or press **talk** on the handset. The base will still be connected to the call.

# Intercom/page Feature

## Intercom from the base to handset

- 1 Press **int'cm/page** on the base. The handset beeps. (If no answer, press **int'cm/page** again to cancel.)
- 2 Press any key on the handset to answer. "Intercom" appears on the display.
- 3 To turn off the intercom, press **talk** on the handset or  on the base.

## Intercom from the handset to base

- 1 Press **int'cm/select** on the handset. (If no answer, press **int'cm/select** again to cancel.)
- 2 At the base, press **int'cm/page** or  to answer. Speak into the base microphone.
- 3 To turn off the intercom, press **talk** on the handset or  on the base.

note

If the page is not answered within one minute, the paging sounds stops automatically.

# Call Transfer Feature

## To Transfer from the Handset to the Base

- 1 Press **(int'cm/select)** on the handset. The caller is put on hold and the intercom tone sounds on the base.
- 2 Press **(int'cm/page)** or **▽** on the base. The intercom mode is activated, but the caller is still on hold.
- 3 To transfer the call to the base, press **(talk)** on the handset. To cancel the transfer, press **▽** on the base.

## To Transfer from the Base to the Handset

- 1 Press **(int'cm/page)** on the base. The caller is put on hold and the intercom tone sounds on the handset.
- 2 Press any key on the handset. The intercom mode is activated, but the caller is still on hold.
- 3 To transfer the call to the handset, press **▽** on the base. To cancel the transfer, press **(talk)** on the handset.

# Chain Dialing

The memory locations on the handset and base are not limited to phone numbers, you may want to store in memory a group of numbers (up to 16 digits) that you need to enter once your call connects. This is referred to as Chain Dialing.



## Mute (Handset/Base)

You can temporarily turn off the microphone so that the person you are talking with cannot hear you. During a telephone call press (mute/pause) (handset) or (mute) (base) to turn off the microphone. Press mute again to cancel muting.

## Selecting a Different Channel

If you encounter interference while using your phone, you can manually change the phone's channel for clear operation. Interference can come from appliances or other phone in your home (see troubleshooting page 43).

## Tone Dialing Switch-over

Some telephone companies use equipment that require pulse dialing (sometimes referred to as rotary dialing). If you need to enter tone dialing digits, you can switch-over to tone dialing during the call. An example of this could be entering your bank account number after you have called your bank. The digits of your bank account can be entered using DTMF tones.

Initially make your call with the pulse dialing mode. Once your call connects, press (Xtone). Enter the desired number (like in the example above, the bank account number). These digits will be sent as tone dialing. This special number can be stored in a memory location. This is referred to as Chain Dialing (See page 30). Once the call ends, the tone mode is canceled and pulse dialing resumes.



- If you answer a call before the Caller ID message is received (Example: before the second ring), the Caller ID message will not appear.
- When the call is received via a telephone company that does not offer Caller ID service, the caller's phone number and name do not appear. (This includes international calls.)
- When the call is via a private branch exchange (PBX), the caller's phone number and name may not appear.

## Caller ID

**You must subscribe to Caller ID service to use this feature.**

When the telephone rings, the Caller ID feature allows you to view the caller's name and phone number on the display before you answer the phone.


Once the caller ID information is stored, the handset displays the phone number of the incoming call, the name, time and the number of calls.

Additionally, you can dial the displayed number and store the information for memory dialing. Make sure you have turned on the Caller ID/Call Waiting feature (See page 12).

## When the Telephone Rings

- 1 When the Caller ID message is received, the display shows the caller's phone number. The incoming call information is stored in the Caller ID record. If the Caller ID service includes the caller's name, the caller's name appears on the display (up to 15 characters).

Here are some typical displays;



**When the phone number and name data are received**

Incoming Call  
UNIDEN CORP  
800-297-1023

**When invalid data is received**

Incoming Call  
Incomplete Data

#### When a private name is received

```
Incoming Call  
Private Name  
800-297-1023
```

#### When a private number is received

```
Incoming Call  
UNIDEN CORP  
Private Number
```

#### When an unknown name is received

```
Incoming Call  
Unknown Name  
800-297-1023
```

#### When an unknown number is received

```
Incoming Call  
UNIDEN CORP  
Unknown Number
```

2 When you answer the call, the display changes to "Talk".

## Viewing the Caller ID Message List

The Caller ID list stores information for up to 70 incoming calls - even unanswered calls.

1 Press **caller id**. The summary screen appears.  
The screen shows the number of new messages and total messages.

```
New :01  
Total:02
```

2 Press **▼** to display the latest Caller ID message.

```
5/17 12:30PM 03  
UNIDEN CORP  
800-297-1023
```

3 Press **▼** to see the next message. Or press **▲** to see previous message.

```
5/11 12:30PM 01  
UNIDEN CORP  
800-2■■-1023
```

4 Press **caller id** to return to standby.

note

- In Caller ID operation, if no key is pressed for more than 20 seconds, an error tone sounds and the telephone returns to the standby mode.
- If a call comes in via a telephone system that does not offer Caller ID service, no information is stored.
- Each message can be up to 15 characters for the phone number and the name.
- Data errors appear as "■■■".



If you get an incoming call or page, the deleting operation is canceled and the telephone returns to standby so you can answer the call or page.

## Deleting Information from the Caller ID List

The EXI3965 stores up to 70 messages. If the phone receives the 71st message, the oldest one in the list is automatically deleted. Caller ID data can also be deleted manually.

### Deleting a Caller ID message

- 1 Press **caller id**. Display the message to be deleted from the Caller ID list by pressing **▲** or **▼**.
- 2 Press **delete/channel**.
- 3 Press **▲** or **▼** to select "Yes" or "No".
- 4 Press **int'cm/select** or **delete/channel**.

```
5/17 12:30PM 03  
UNIDEN CORP  
800-297-1023
```

```
Delete Message?  
▶ Yes  
No
```

#### When the pointer is at "Yes":

A tone sounds and the Caller ID message is deleted.

#### When the pointer is at "No":

The display returns to the Caller ID message.

## Deleting all Caller ID names/numbers

- 1 Press **caller id** .
- 2 Press **delete/channel** .
- 3 Press **▲** or **▼** to select "Yes" or "No".
- 4 Press **int/cm/select** or **delete/channel** .

### When the pointer is at "Yes":

A tone sounds and all stored Caller ID messages are deleted.

### When the pointer is at "No":

The display returns to the summary screen.

```
New :01  
Total:02
```

```
Delete All?  
Yes  
No
```

```
Total:00
```

```
New :01  
Total:02
```



- While using the "Delete All?" screen, if no key is pressed for more than 20 seconds, an error tone sounds and the telephone returns to standby.

## Using the Caller ID List

### Calling a party from the Caller ID list

You can place a call from the Caller ID list. The EXI3965 stores up to 70 messages.

- 1 Press **caller id** . Display the message to be dialed from the caller ID list by pressing **▲** or **▼** .
- 2 Press **talk** . The displayed phone number dials automatically.

```
12/21 12:30PM 03  
UNIDEN CORP  
800-297-1023
```

```
Talk  
8002971023
```

- You cannot make a call from the Caller ID list if your EXI3965 is connected to private branch exchange (PBX).
- When a long distance call has been set, "1" appears in the display.



- You can not store a Caller ID message if no phone number appears in the message.
- If there is an incoming call or page, memory storage is canceled and the telephone is set to receive the incoming call or page.
- Once a message from the Caller ID list is stored in a memory location, the Caller ID data can be edited. (See page 25.)

## Long Distance calls and Area Code setting/cancellation

Pressing **①** while the incoming call information is displayed (in step 1) will set or cancel a long distance call. Pressing **③** will set or cancel an area code setting.

## Storing Caller ID messages in Memory dialing

Messages shown in the Caller ID list can be stored in memory dialing. Using the incoming call information (i.e., Caller ID list), the phone number of the party on the Caller ID list can be stored in memory dialing.

1 Press **caller id**. Select the phone number to be stored from the Caller ID list by pressing **▲** or **▼**.

```
5/17 12:30PM 03
UNIDEN CORP
800-297-1023
```

2 Press **memory**.

```
Select Location
01 UNIDEN CORP
02 JONE DOE
```

3 Press **▲** and **▼** or enter a two-digit number (01 - 30) to select the memory location to be stored.

4 Press **int/cm/select**. If a message has already been stored in the selected memory location, a confirmation screen is displayed. Press **▲** or **▼** to select "Yes" or "No". Press **int/cm/select** to overwrite. The display returns to the Caller ID list.

```
Replace Memory?
Yes
#No
```

If the memory location is available, you will need to select a Distinctive Ring option.

```
Distinctive Ring
#No Selection
Ringer A
```

# Using “Caller ID on Call Waiting” Service

“Caller ID”, “Call waiting”, and Caller ID on Call waiting are separate services. CIDCW (Caller ID on Call Waiting) performs the same as regular Caller ID on a call waiting number. You must subscribe to the “Caller ID on call waiting (CIDCW) services” before you can use the following features. The “Call waiting” service can also be used independently. Please contact your local telephone company for details.

1 When a new incoming call arrives during your current telephone call, the phone number and the name of the caller are displayed.



```
Talk 10:30
UNIDEN CORP
800-297-1023
```

2 Press **(flash)** . You will be able to talk with the second caller. The first caller will be put on hold.

3 To return to the first caller, press **(flash)** again.




- To activate features, select “CW options” in Caller ID setup. See page 12.
- You can also answer a waiting call immediately by pressing the **flash** key, the first caller will be placed on hold. To return to the original caller, press **flash** again.

## Call Waiting Deluxe Features

Your EXI3965 gives you new options for call waiting. At the touch of a button, you can ask the caller to hold, send them to your voice mail service, or conference them into your current call. You may be required to subscribe to call waiting and call waiting deluxe to use these features. Not all features are available in all areas. Check with your local telephone company for details.

- 1 When you receive a call waiting call, press **menu** for a list of options.
- 2 Press the **▲**, **▼** or number key pad (0 - 7) key to select an option.

### For example:




- 3 Press **int/cm/select**. A confirmation screen will appear.

Your EXI3965 is pre-programmed with seven call waiting options. You may select to ask the calling party to **hold**, send them a **busy** message, **forward** them to your voice mail, or conference them into the current call. You may also select to **answer and drop** the first caller or, at any time, choose to **drop the first** or **drop the last caller**. Check with your local telephone company for a full list of options.



# Changing the Digital Security Code

The digital security code is an identification code used to connect the handset and the base unit. Normally, setting the code is not necessary. The first time you charge your handset, the security code is automatically set. In the rare situation that you suspect another cordless telephone is using the same security code, you can change the code.



- 1 Remove the handset from the base unit. Press and hold **int'cm/page** on the base.
- 2 While the handset is emitting the paging sound, replace the handset to the base unit and continue to hold the **int'cm/page** for 3 seconds. Release the **int'cm/page**. The paging tone stops. Leave the handset on the base for more than 3 seconds. A random, new security code is set.




If the handset battery pack is completely discharged or the battery pack is removed, the digital security code will be lost. If this happens, a new security code is set automatically next time the battery pack is charged.




For additional face plate colors visit our web site:  
[www.uniden.com](http://www.uniden.com)

## Changing the Face Plate

**To remove the Face plate**

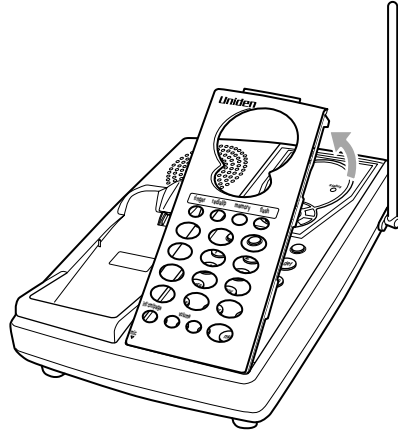

**To attach the Face plate**

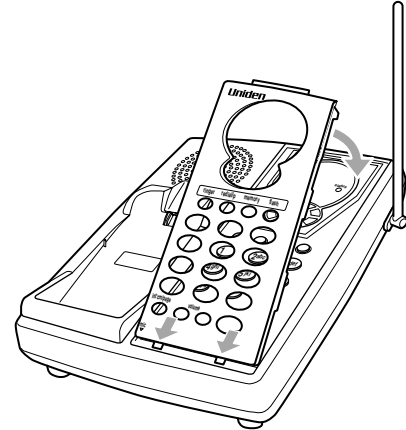

## Headset Installation

Your phone may be used with an optional headset, the Uniden HS910. To use this feature, insert headset plug into the headset jack. Your phone is ready for hands-free conversations. (Headsets may be purchased by calling the Uniden Parts Department or visiting the website. See Page 44.)




## Installing the Beltclip

### To attach the beltclip

Insert the beltclip into the holes on each side of the handset. Press down until it clicks.

### To remove the beltclip

Pull both sides of the beltclip to release the tabs from the holes.

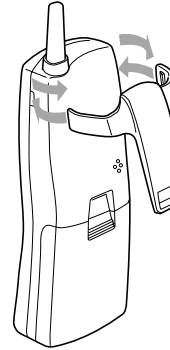

## Maintenance

### When slightly dirty


Wipe with a soft, dry cloth.

### When very dirty

Wipe with a soft cloth that has been dampened with diluted, neutral detergent.  
Dry with a dry cloth.

### When the charging terminals become dirty

Wipe with a dry cloth or a pencil eraser, if necessary.

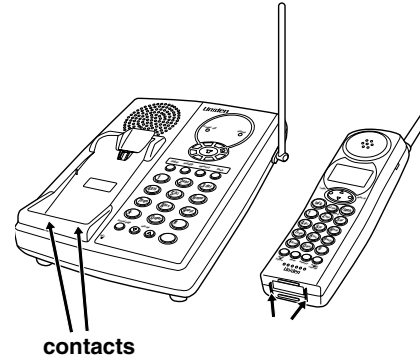

Do not use paint thinner, benzene, alcohol, or other chemical products. Doing so may discolor the surface of the telephone and damage the finish.

# Note on Power Sources

## Battery replacement and handling

When the operating time becomes short, even after a battery is recharged, please replace the battery. With normal usage, your battery should last about one year. Please contact your place of purchase or the Uniden Parts Department for a replacement battery. (See Page 44.)

### Power Failure

During the period that the power is off, you will not be able to make or receive calls with the telephone.

## RECYCLING NICKEL-CADMIUM BATTERIES

**NICKEL-CADMIUM BATTERIES MUST BE DISPOSED OF PROPERLY.**



Nickel-cadmium cells are used in the battery pack. Please take your used nickel-cadmium battery packs to a store that recycles nickel-cadmium batteries.

### Caution

- Use the specified battery pack.
- Do not remove the battery from the handset to charge it.
- Never throw the battery into a fire, disassemble it, or heat it.
- Do not remove or damage the battery casing.

# Troubleshooting

If your phone is not performing to your expectations, please try these simple steps first.

| Symptom  | Suggestion  |
|--|---|
| The <b>status</b> LED won't light when the handset is placed in the base unit. | <ul style="list-style-type: none"> <li>• Make sure the AC adapter is plugged into the base unit and wall outlet.</li> <li>• Make sure the handset is properly seated in the base unit.</li> <li>• Make sure the charging contacts on the handset and base unit are clean.</li> </ul>  |
| The audio sounds weak and/or scratchy.   | <ul style="list-style-type: none"> <li>• Press <b>(delete/channel)</b> during a call to help eliminate background noise.</li> <li>• Make sure that the base unit antenna is in a vertical position.</li> <li>• Move the handset and or base unit to a different location away from metal objects or appliances and try again.</li> <li>• Make sure that you are not too far from the base.</li> </ul> |
| Can't make or receive calls.   | <ul style="list-style-type: none"> <li>• Check both ends of the base unit telephone line cord.</li> <li>• Make sure the AC adapter is plugged into the base unit and wall outlet.</li> <li>• Disconnect the AC adapter for a few minutes, then reconnect it.</li> <li>• Reset the digital security code (See page 39).</li> <li>• Make sure <b>(talk)</b> is pressed.</li> </ul>                      |
| The handset doesn't ring or receive a page.                                    | <ul style="list-style-type: none"> <li>• The battery pack may be weak. Charge the battery on the base unit for 15 - 20 hours.</li> <li>• The handset may be too far away from the base unit.</li> <li>• Place the base unit away from appliances or metal objects.</li> <li>• Reset the digital security code (See page 39).</li> </ul>   |
| Severe noise interference  | <ul style="list-style-type: none"> <li>• Keep the handset away from microwave ovens, computers, remote control toys, wireless microphones, alarm systems, intercoms, room monitors, fluorescent lights, and electrical appliances.</li> <li>• Move to another location or turn off the source of interference.</li> </ul>   |
| The Caller ID/CIDCW does not display.  | <ul style="list-style-type: none"> <li>• The handset was picked up before the second ring.</li> <li>• The call was placed through a switch board.</li> <li>• Call your local telephone company to verify your Caller ID service is current.</li> <li>• Make sure that the CIDCW option is set to "CIDCW on" or "CW options".</li> </ul>   |

# General Information

The EXI3965 complies with FCC Parts 15 and 68.  
Operating Temperature: 0°C to +50°C (+32°F to +122°F)

## AC Adapter Information

AC Adapter part number: AD-312  
Input Voltage: 120V AC 60Hz  
Output Voltage: 9V DC 350 mA

## Battery Information

Battery part number: BT-905  
Capacity: 600 mAh, 3.6V  
Battery Use Time (per charge)  
From fully charged:  
Talk Mode duration 6 hours  
Standby Mode duration 10 days

With normal usage, the battery should last about one year.

Replacement batteries may be purchased at your local Uniden dealer or by contacting the Uniden Parts Department (800) 554-3988. Hours are from 7:00 a.m. to 5:00 p.m. Central Time, Monday through Friday. We can also be reached on the web at [www.uniden.com](http://www.uniden.com)

Specifications, features, and availability of optional accessories are all subject to change without prior notice.



If the handset is left off of the base, the actual Talk Mode duration will be reduced respective to the amount of time the handset is off the base.

## Precautions!

Before you read anything else, please observe the following:

### Warning!

Uniden America Corporation DOES NOT represent this unit to be waterproof. To reduce the risk of fire, electrical shock, or damage to the unit, DO NOT expose this unit to rain or moisture.

### Rechargeable Nickel-Cadmium Battery Warning

- This equipment contains a rechargeable nickel-cadmium battery.
- Cadmium is a chemical known to the State of California to cause cancer.
- The rechargeable nickel-cadmium battery contained in this equipment may explode if disposed of in a fire.
- **Do not** short-circuit the battery.
- Do not charge the rechargeable nickel-cadmium battery used in this equipment in any charger other than the one designed to charge this battery as specified in the owner's manual. Using another charger may damage the battery or cause the battery to explode.

### Rechargeable Nickel-Cadmium Batteries Must Be Recycled or Disposed of Properly



- Uniden voluntarily participates in an RBRC® industry program to collect and recycle nickel-cadmium batteries at the end of their useful life, when taken out of service within the United States. The RBRC® program provides a convenient alternative to placing used nickel-cadmium batteries into the trash or municipal waste stream, which is illegal in some areas.
- Through the RBRC® program, Uniden makes it easy for you to drop off the used battery at local retailers of replacement nickel-cadmium batteries. You may also contact your local recycling center for information on where to return the used battery. Please call 1-800-8-BATTERY for information on Ni-Cd battery recycling in your area. Uniden's involvement in this program is part of its commitment to protecting our environment and conserving natural resources.
- RBRC® is a registered trademark of the Rechargeable Battery Recycling Corporation.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

## Important Safety Instructions

When using your telephone equipment, these basic safety precautions should always be followed to reduce the risk of fire, electrical shock, and injury to persons:

1. Read and understand all instructions.
2. Follow all warnings and instructions marked on the product.
3. Unplug this product from the wall outlet before cleaning. Use a dry cloth for cleaning without liquid or aerosol cleaners.
4. Do not use this product near water; for example, near a bath tub, wash bowl, kitchen sink or laundry tub, in a wet basement, or near a swimming pool.
5. Do not place this product on an unstable cart, stand, or table. The telephone may fall, causing serious damage to the unit.
6. Slots and openings in the cabinet and the back or bottom are provided for ventilation. To protect the product from overheating, these openings must not be blocked or covered. This product should never be placed near or over a radiator or heat register. This product should not be placed in a built-in installation unless proper ventilation is provided.
7. This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply to your home, consult your dealer or local power company.
8. Do not allow anything to rest on the power cord. Do not locate this product where the cord will be damaged by persons walking on it.
9. Do not overload wall outlets and extension cords, as this can result in the risk of fire or electrical shock.
10. Never push objects of any kind into this product through cabinet slots, as they may touch dangerous voltage points or short out parts that could result in a risk of fire or electric shock. Never spill liquid of any kind on the product.
11. To reduce the risk of electric shock, do not disassemble this product. Take it to qualified service personnel when service or repair work is required. Opening or removing covers may expose you to dangerous voltages or other risks. Incorrect reassembly can cause electric shock when the appliance is subsequently used.
12. Unplug this product from the wall outlet and refer servicing to qualified service personnel under the following conditions:
  - A. When the power supply cord is damaged or frayed.
  - B. If liquid has been spilled into the product.
  - C. If the product has been exposed to rain or water.
  - D. If the product does not operate normally when following the operating instructions. (Adjust only those controls that are covered by the operating instructions. Improper adjustment of other controls may result in damage and will often require extensive repair work by a qualified technician.)
  - E. If the product has been dropped or the cabinet has been damaged.
  - F. If the product exhibits a distinct change in performance.
13. Do not use the telephone to report a gas leak in the vicinity of the leak.

### Additional Battery Safety Precautions

**Caution!** To reduce the risk of fire or injury to persons by the battery, read and follow these instructions:

1. Use only the appropriate type and size battery pack specified in

the owner's manual.

2. Do not dispose of the battery pack in a fire. The cell may explode. Check the nickel-cadmium battery disposal package insert for disposal instructions.
3. Do not open or mutilate the battery pack. Released electrolyte is corrosive and may cause damage to the eyes or skin. It may be toxic if swallowed.
4. Exercise care in handling the battery in order not to short the battery with conducting materials such as rings, bracelets, and keys. The battery or conductor may overheat and cause burns.
5. Charge the battery pack provided with or identified for use with this product only in accordance with the instructions and limitations specified in the owner's manual provided for this product.
6. Observe proper polarity orientation between the battery pack and battery charger.

**SAVE THESE INSTRUCTIONS!**

## Important Electrical Considerations

Unplug all electrical appliances when you know an electrical storm is approaching. Lightning can pass through your household wiring and damage any device connected to it. This phone is no exception.

### Warning!

Please do not attempt to unplug any appliance during an electrical storm.

### The FCC Wants You To Know

Changes or modifications to this product not expressly approved by Uniden, or operation of this product in any way other than as detailed by the owner's manual, could void your authority to operate this product. The equipment cannot be used on public coin phone service provided by the telephone company. Connection to party line service is subject to state tariffs. (Contact the state public utility commission, public service commission or corporation commission for information.)

### Range

Your new phone is designed to achieve the maximum possible range by transmitting and receiving according to the highest specifications set forth by the FCC. We have rated this phone to operate at a maximum distance with the qualification that the range depends upon the environment in which the telephone is used. Many factors limit range, and it would be impossible to include all the variables in our rating. The Maximum Range rating of this phone is meant to be used as a means of comparison against other range claims.

### Telephone Line Problems

The FCC has granted the telephone company the right to disconnect service in the event that your phone causes problems on the telephone line. Also, the telephone company may make changes in facilities and services which may affect the operation of your unit. However, your telephone company must give adequate notice in writing prior to such actions to allow you time for making necessary arrangements to continue uninterrupted service.

If you are having trouble with your telephone service, you must first disconnect your phone to determine if it is the cause of your problem. If you determine that it is the cause, you must leave it disconnected until the trouble has been corrected.

**ADDITIONAL INFORMATION [ 45 ]**

## Radio Interference

Radio interference may occasionally cause buzzing and humming in your cordless handset, or clicking noises in the base. This interference is caused by external sources such as TV, refrigerator, vacuum cleaner, fluorescent lighting, or electrical storm. Your unit is NOT DEFECTIVE. If these noises continue and are too distracting, please check around your home to see what appliances may be causing the problem. In addition, we recommend that the base not be plugged into a circuit that also powers a major appliance because of the potential for interference. Be certain that the antenna on the unit is fully extended when needed.

In the unlikely event that you consistently hear other voices or distracting transmissions on your phone, you may be receiving radio signals from another cordless telephone or other source of interference. If you cannot eliminate this type of interference, you need to change to a different channel.

Finally, it should be noted that some cordless telephones operate at frequencies that may cause interference to nearby TVs and VCRs. To minimize or prevent such interference, the base of the cordless telephone should not be placed near or on top of a TV or VCR. If interference is experienced, moving the cordless telephone farther away from the TV or VCR will often reduce or eliminate the interference.

## More Than One Cordless Telephone

If you want to use more than one cordless telephone in your home, they must operate on different channels. Press the channel key to select a channel that provides the clearest communication.

## Cordless Telephone Privacy

Cordless telephones are radio devices. Communications between the handset and base of your cordless telephone are accomplished by means of radio waves which are broadcast over the open airways. Because of the inherent physical properties of radio waves, your communications can be received by radio receiving devices other than your own cordless telephone unit. Consequently, any communications using your cordless telephone may not be private.

## Installation Considerations

### Selecting a Location

Before choosing a location for your new phone, there are some important guidelines you should consider:

- The location should be close to both a phone jack and continuous power outlet. (A continuous power outlet is an AC outlet which does not have a switch to interrupt its power.)
- Keep the base and handset away from sources of electrical noise such as motors or fluorescent lighting.
- Be sure there is sufficient space to fully extend the base antenna.
- The base can be placed on a desk or tabletop or mounted on a standard telephone wall plate.
- You should charge your new phone for 15-20 hours before completing the installation or using the handset.

## Telephone Line Outlets

There are two types of phone outlets:

### Modular Jack

Most phone equipment available now uses modular jacks. Phone cords are fitted with a molded plastic connector which plugs into this type of jack. If you do not have modular phone jacks, contact your local telephone company for information about their installation.

### Hardwired Jack

Some equipment is wired directly to a phone jack, and these types of installations require a modular jack converter. This type of installation is not difficult; however, you should contact your Uniden telephone dealer or a telephone supply store for advice about the proper adapter or converter for your particular situation.

## Connecting the Telephone Cords

Consider these safety guidelines before connecting the telephone cords:

### Caution!

- *Never install telephone wiring during a lightning storm.*
- *Never touch uninsulated telephone wires or terminals unless the telephone line has been disconnected.*
- *Use caution when installing or modifying telephone lines.*

## Applying Power to the Base

This phone requires an AC outlet, without a switch to interrupt power, and the included AC adapter. To relieve strain on the DC plug when the phone is placed on a desk or table, wrap the power cord around the strain relief notch on the bottom of the base.

**NOTE:** *Place the power cord so that it does not create a trip hazard, or where it could become chafed and create a fire or other electrical hazards.*

## Adapter Safety Features

If the AC adapter furnished with this phone has a polarized line plug (a plug having one blade wider than the other), this plug will fit into the power outlet only one way. If you are unable to insert the plug fully into the outlet, try reversing the plug.

**Do not** alter the shape of the blades of the polarized plug!


**NOTE:** *If you cannot plug the AC adapter into the outlet, contact someone about replacing the outlet.*

Plug the AC Adapter into a standard 120 VAC wall outlet.

*Do not use an outlet controlled by a wall switch.*



Use only the Uniden AC Adapter supplied with this phone.



## One Year Limited Warranty

**Important:** Evidence of original purchase is required for warranty service.

WARRANTOR: UNIDEN AMERICA CORPORATION ("Uniden")

ELEMENTS OF WARRANTY: Uniden warrants, for one year, to the original retail owner, this Uniden Product to be free from defects in materials and craftsmanship with only the limitations or exclusions set out below.

WARRANTY DURATION: This warranty to the original user shall terminate and be of no further effect 12 months after the date of the original retail sale. The warranty is invalid if the Product is (A) damaged or not maintained as reasonable or necessary, (B) modified, altered, or used as part of any conversion kits, subassemblies, or any configurations not sold by Uniden, (C) improperly installed, (D) serviced or repaired by someone other than an authorized Uniden service center for a defect or malfunction covered by this warranty, (E) used in any conjunction with equipment or parts or as part of any system not manufactured by Uniden, or (F) installed or programmed by anyone other than as detailed by the owner's manual for this product.

STATEMENT OF REMEDY: In the event that the product does not conform to this warranty at any time while this warranty is in effect, warrantor will either, at its option, repair or replace the defective unit and return it to you without charge for parts, service, or any other cost (except shipping and handling) incurred by warrantor or its representatives in connection with the performance of this warranty. Warrantor, at its option, may replace the unit with a new or refurbished unit. THE LIMITED WARRANTY SET FORTH ABOVE IS THE SOLE AND ENTIRE WARRANTY PERTAINING TO THE PRODUCT AND IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES OF ANY NATURE WHATSOEVER, WHETHER EXPRESS, IMPLIED OR ARISING BY OPERATION OF LAW, INCLUDING, BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY DOES NOT COVER OR PROVIDE FOR THE REIMBURSEMENT OR PAYMENT OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. Some states do not allow this exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to you.

LEGAL REMEDIES: This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. This warranty is void outside the United States of America.

PROCEDURE FOR OBTAINING PERFORMANCE OF WARRANTY: If, after following the instructions in the owner's manual you are certain that the Product is defective, pack the Product carefully (preferably in its original packaging). The Product should include all parts and accessories originally packaged with the Product. Include evidence of original purchase and a note describing the defect that has caused you to return it. The Product should be shipped freight prepaid, by traceable means, to warrantor at:

**Uniden America Corporation**  
Parts and Service Division  
4700 Amon Carter Blvd.  
Fort Worth, TX 76155

(800) 297-1023, 7 a.m. to 7 p.m. Central, Monday through Friday



# Index

## O - 9

- 3-way conferencing . . . . .28
- 18 ring options . . . . .15

## A

- Area Code . . . . . 13
- Auto Talk . . . . . 12

## B

- Base ringer . . . . .14
- Base speaker volume . . . . . 18
- Battery pack
  - Preparing and charging . . .7
  - Replacement and handling 42
- Beltclip . . . . .41

## C

- Caller ID
  - Caller ID service . . . . .32
  - Calling . . . . . 32
  - Call Waiting . . . . .18, 37
  - Deleting . . . . .34
  - Setting . . . . . 12
  - Storing . . . . . 36
  - Using . . . . .35
  - Viewing . . . . .33
- Connection . . . . .8

## D

- Deluxe Call Waiting Features . . 38
- Dialing mode . . . . .9
- Digital security code . . . . .39
- Distinctive Ringer . . . . .15

## E, F, G, H

- Earpiece volume . . . . .18
- Face plate . . . . .40
- General information . . . . .44
- Headset installation . . . . .40

## I, J, K, L

- Important Safety
  - Instructions . . . . .45
- Intercom . . . . . 29
- Language . . . . .16

## M, N, O

- Maintenance . . . . .41
- Making a call . . . . .17
- Memory dialing
  - Editing . . . . . 25
  - Erasing . . . . .25
  - Making calls . . . . .23
  - Storing . . . . .21
- Mute . . . . .31

## P, Q

- Package contents . . . . .5
- Precautions . . . . .45

## R

- Receiving a call . . . . .17
- Redialing a call . . . . .19
- Ringer volume . . . . .14

## S

- Setting up
  - Base unit . . . . .9
  - Handset . . . . .7

## T, U, V, W, X, Y, Z

- Transfer . . . . .30
- Transferring a call . . . . . 30
- Troubleshooting . . . . .43
- Warranty . . . . .46

# Memo

## **At Uniden, we'll take care of you!**

If you need any assistance with this product, please call our Customer Hotline at

**1-800-297-1023**

**PLEASE DO NOT RETURN THIS PRODUCT TO THE PLACE OF PURCHASE.**

Our Uniden representatives will be happy to help you with any matters regarding the operation of this unit, available accessories, or any other related matters.

Thank you for purchasing a Uniden product.

Hours: M-F 7:00 a.m. to 7:00 p.m. CST.

[www.uniden.com](http://www.uniden.com)

A World Without Wires | Uniden®

Covered under one or more of the following U.S. patents:

|           |           |           |           |           |           |
|-----------|-----------|-----------|-----------|-----------|-----------|
| 4,511,761 | 4,523,058 | 4,595,795 | 4,797,916 | 5,381,460 | 5,426,690 |
| 5,434,905 | 5,491,745 | 5,533,010 | 5,574,727 | 5,650,790 | 5,660,269 |
| 5,661,780 | 5,663,981 | 5,671,248 | 5,717,312 | 5,754,407 | 5,768,345 |
| 5,787,356 | 5,838,721 | 5,864,619 | 5,893,034 | 5,912,968 | 5,915,227 |
| 5,929,598 | 5,930,720 | 5,960,358 | 5,987,330 |           |           |

© 2001 Uniden America Corporation, Fort Worth, TX  
All rights reserved. Printed in China.  
UCZZ01728ZZ

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>