



Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

## Extra Wide Refrigerators

**RS MODELS —**  
 Stainless steel  
 exterior and  
 interior.

**RS-1D-S7-EW**  
**RS-2D-S7-EW**  
**RS-3D-S7-EW**

**RSA MODELS —**  
 Stainless steel  
 exterior.  
 Aluminum interior.

**RSA-1D-S7-EW**  
**RSA-2D-S7-EW**  
**RSA-3D-S7-EW**

### Half Door, Pass-Thru and Remote Models Available



**RS-2D-S7-EW**

### Standard Features (all models)

- Digital Thermometer/Battery Back-up
- Adjustable Stainless Steel Legs
- Energy Saver Switch
- Stainless Steel Case Front, Door(s) and Sides
- Heavy-Duty Lifetime Cam Lift Hinges
- Adjustable Wire Shelves
- Lifetime Safety Grip Handle(s)
- Self-Closing Doors with Safety Stops
- Flush Mounted Automatic Interior Lighting
- Energy Saving Thermal Breaker Strips
- Door Opening Accepts 12" x 20" and 18" x 26" Pans
- Heavy-Duty Cylinder Locks
- One Piece Self-Adjusting Magnetic Door Gaskets
- High Impact ABS Interior Door Liner
- Environmentally Friendly R-134a Refrigerant
- Plasticized Fin Coil
- Non-Electric Condensate Evaporator
- Cord and Plug Attached on 115V Models 12 Amps or Less

### Optional Features and Accessories

- Dial Thermometer
- Two Half Doors in Place of One Full Length Door
- Full and Half Sized Hinged Glass Doors with Cylinder Locks
- Change Door Swing
- Adjustable Stainless Steel Wire Shelves
- Stainless Steel Angle Pan Slides
- Zinc Plated Wire Pan Slides
- 5" Diameter Heavy-Duty Swivel Casters with Brakes
- Stainless Steel Case Back
- Fluorescent Lights
- Remote and Pass-Thru Models

#### Cabinet:

The cabinet front and doors are constructed of heavy gauge polished stainless steel to maintain an attractive appearance for years of heavy use. Foamed-in-place polyurethane insulation throughout the cabinet ensures the ultimate in energy efficiency.

#### Doors:

The self-closing doors are securely mounted on rugged cam-lift hinges which have a lifetime guarantee. Each door has a heavy-duty cylinder lock and self-adjusting magnetic gasket to prevent the cold air from escaping. Humidity control wires located around the door jamb prevent condensation from forming on the cabinet front and are concealed by a high impact, non-conductive thermal breaker strip. The interior door liner is constructed of durable ABS material which resists denting and scratching and is easy to clean. Each safety grip handle is guaranteed for life. Interior lighting is controlled automatically by a switch mounted in the hinge.

#### Shelving:

The heavy-duty wire shelves are adjustable in one inch increments. A wide door opening allows the use of a variety of optional pan slide types for 12" x 20", 18" x 26", and 14" x 18" pans and trays.

#### Refrigeration System:

All components of the self-contained refrigeration system are mounted on top of the cabinet. The air circulating fans and the forced convection cooling coil are contained in an insulated housing separate from the product zone allowing for maximum food storage capacity. All condensate water is disposed of automatically by the energy efficient non-electric condensate evaporator, no plumbing is required.

Approvals:



Victory Refrigeration specification sheets are available online at [www.victory-refrig.com](http://www.victory-refrig.com).

CHARACTERISTICS	ONE SECTION		TWO SECTION		THREE SECTION	
	Reach-In	Pass-Thru	Reach-In	Pass-Thru	Reach-In	Pass-Thru
Width, Overall	31 1/4	31 1/4	58 3/8	58 3/8	85 1/2	85 1/2
Depth, Overall (incl. handles)	36 3/8	39 3/8	36 3/8	39 3/8	36 3/8	39 3/8
Height, Overall (incl. adj. legs)	84	84	84	84	84	84
Depth, Door(s) Open 90°	60	87 5/8	60	87 5/8	60	87 5/8
Clear Door Width	22 1/2	22 1/2	22 1/2	22 1/2	22 1/2	22 1/2
Clear Full Door Height	55 1/4	55 1/4	55 1/4	55 1/4	55 1/4	55 1/4
Clear Half Door Height	25 3/8	25 3/8	25 3/8	25 3/8	25 3/8	25 3/8
Capacity Net (cubic feet)	24.4	26.2	52.0	55.6	79.6	84.9
No. of Full Doors	1	2	2	4	3	6
No. of Half Doors	2	4	4	8	6	12
No. of Shelves	3	3	6	6	9	9
Shelf Area (square feet)	19.1	19.1	38.2	38.2	57.3	57.3
Cabinet Voltage	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Feed Wires	2	2	2	2	2	2
Condensing Unit Voltage	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Condensing Unit Size (HP)	1/2	1/2	1/2	1/2	1/2	1/2
Total Amperes	5.5	6.2	8.2	8.8	10.6	12.0

Crated dim. & wts.	Ht.	Width	Depth	Cu.Ft.	Lbs
One Section	87	36 1/2	44 3/4	82.2	430
Two Section	87	63 5/8	44 3/4	143.3	670
Three Section	87	90 3/4	44 3/4	204.4	935


Approximate Pass-Thru weights, add 15%

**FOR REMOTE MODELS** - Substitute an "R" for the "S" in suffix. For example: Model RS-1D-S7 (self-contained) would be RS-1D-R7 remote cabinet. Air circulating fans, expansion valve and plasticized coil are provided. Condensing units not supplied. The following units are recommended with 1/2" O.D. Suction line, 3/4" O.D. Liquid line.

	REMOTE REFRIGERATION		Cabinet	Amps
	Cond. Unit	BTUH		
One Section	1/3 H.P.	2540	115/60/1	4.9
Two Section	2/3 H.P.	2540	115/60/1	7.8
Three Section	1/2 H.P.	3800	115/60/1	8.5

For Remote Pass-Thru - Consult factory

Dimensional tolerance ± 1/4" Metric dimensions (MM)

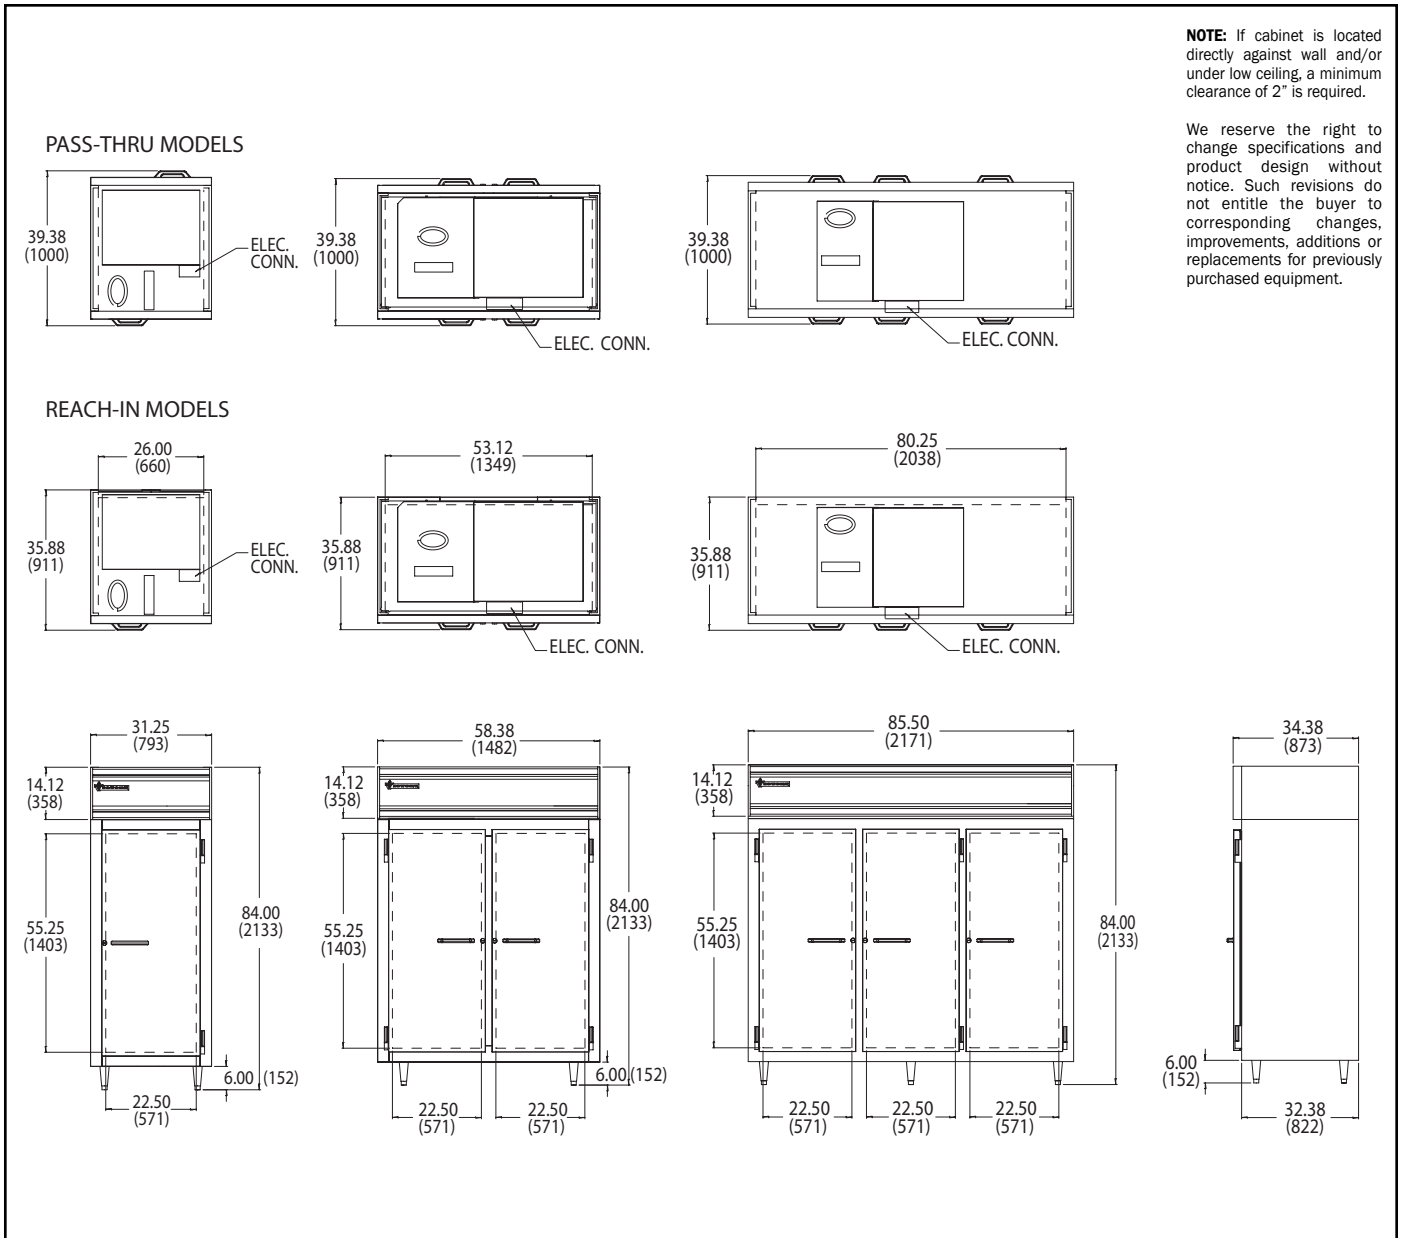

**NOTE:** If cabinet is located directly against wall and/or under low ceiling, a minimum clearance of 2" is required.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Continuous product development may necessitate specification changes and design without notice.



Victory participates in the KCL CADalog, the most current source of CAD symbols for foodservice designers worldwide. Symbols include standard equipment in plan, side, front and 3-D views, layered for FEDA/FCSI recommended guidelines.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>