



Project: _____
 Location: _____
 Item #: _____
 Quantity: _____

Sliding Glass Door Merchandiser

VM-2 MODEL —

Heavy duty white coated steel interior and exterior, black PVC door frames and black coated steel front grill.

VM-2-S



Standard Features

- Exterior of Heavy Duty White Coated Steel, Black PVC Door Frames, and Black Coated Steel Front Grill
- Interior has a White Steel Liner with Stainless Steel Floor
- Safety Shielded, Bright, Interior Fluorescent Lighting with a Lighted Sign Header
- Sliding Glass Doors have Triple Pane Glass with a Layer of Thermal Insulating Film
- A Stainless Steel Track for the Sliding Glass Doors Provides Extra Durability and is Easy to Clean
- Four (4) Adjustable, Wire Epoxy, Wire Shelves per Door Opening
- Environmentally Friendly R-134a Refrigerant
- Heavy Duty Stainless Steel Pilaster Shelf Supports and Shelf Clips
- Foamed-In-Place High Density Polyurethane Insulation
- Four (4) Three Inch Casters are Standard
- Bottom Mounted Condensing Unit for Easy Maintenance
- Removable Front Grill for Easy Repair and Maintenance
- Oversized Refrigeration System Cools Products Quickly and Keeps Them Cold
- Listed Under NSF-7 for Storage and/or Display of Pre-packaged or Bottled Products
- Cord and Plug Attached
- 2 -Year Parts & Labor Warranty

Cabinet:

Cabinet exterior constructed of heavy duty white coated steel, black PVC door frames and black coated steel front grill. Interior side and back walls constructed of white coated steel. Interior floor constructed of stainless steel with coved corners for convenient cleaning. A bright, vertically mounted fluorescent light enhances product display and visibility. Insulated with thick high density foamed -in-place CFC free polyurethane foam. Four (4) three inch casters come standard.

Refrigeration:

The bottom mounted, self-contained refrigeration system uses environmentally friendly R134A refrigerant and the oversized evaporator coil is epoxy coated to eliminate potential corrosion. Cabinet easily maintains 33°F to 38°F.

Doors:

The sliding glass doors have triple pane glass with a layer of thermal insulating film for added energy efficiency. A stainless steel track for the sliding glass doors provides extra durability and is easy to clean. The full-size glass provides maximum product visibility.


Approvals:	 	Victory Refrigeration specification sheets are available online at www.victory-refrig.com .
------------	---	---

CHARACTERISTICS	TWO SECTION
	Reach-In
Width, Overall	53 1/4"
Depth, Overall	31 7/8"
Height, Overall *	82 1/2"
Depth, Open Door 90°	N/A
Clear Door Opening, Width	20"
Clear Full Door Opening, Height	50"
Capacity Net (cubic feet)	48
No. of Full Doors	2
No. of Shelves	8
Shelf Area (square feet)	3 7/16"
Cabinet Voltage	115/60/1
Feed Wires	2
Condensing Unit Voltage	115/60/1
Condensing Unit Size (HP)	1/2
Total Amperes	10.4
Plug, NEMA	5-15P

* Height includes 4" for caster

Crated dim. & wts.	Ht.	Width	Depth	Cu. Ft.	Lbs.
Two Section	83.5"	54.3"	32.3"	95	503

Dimensional tolerance ± 1/4" Metric dimensions (MM)

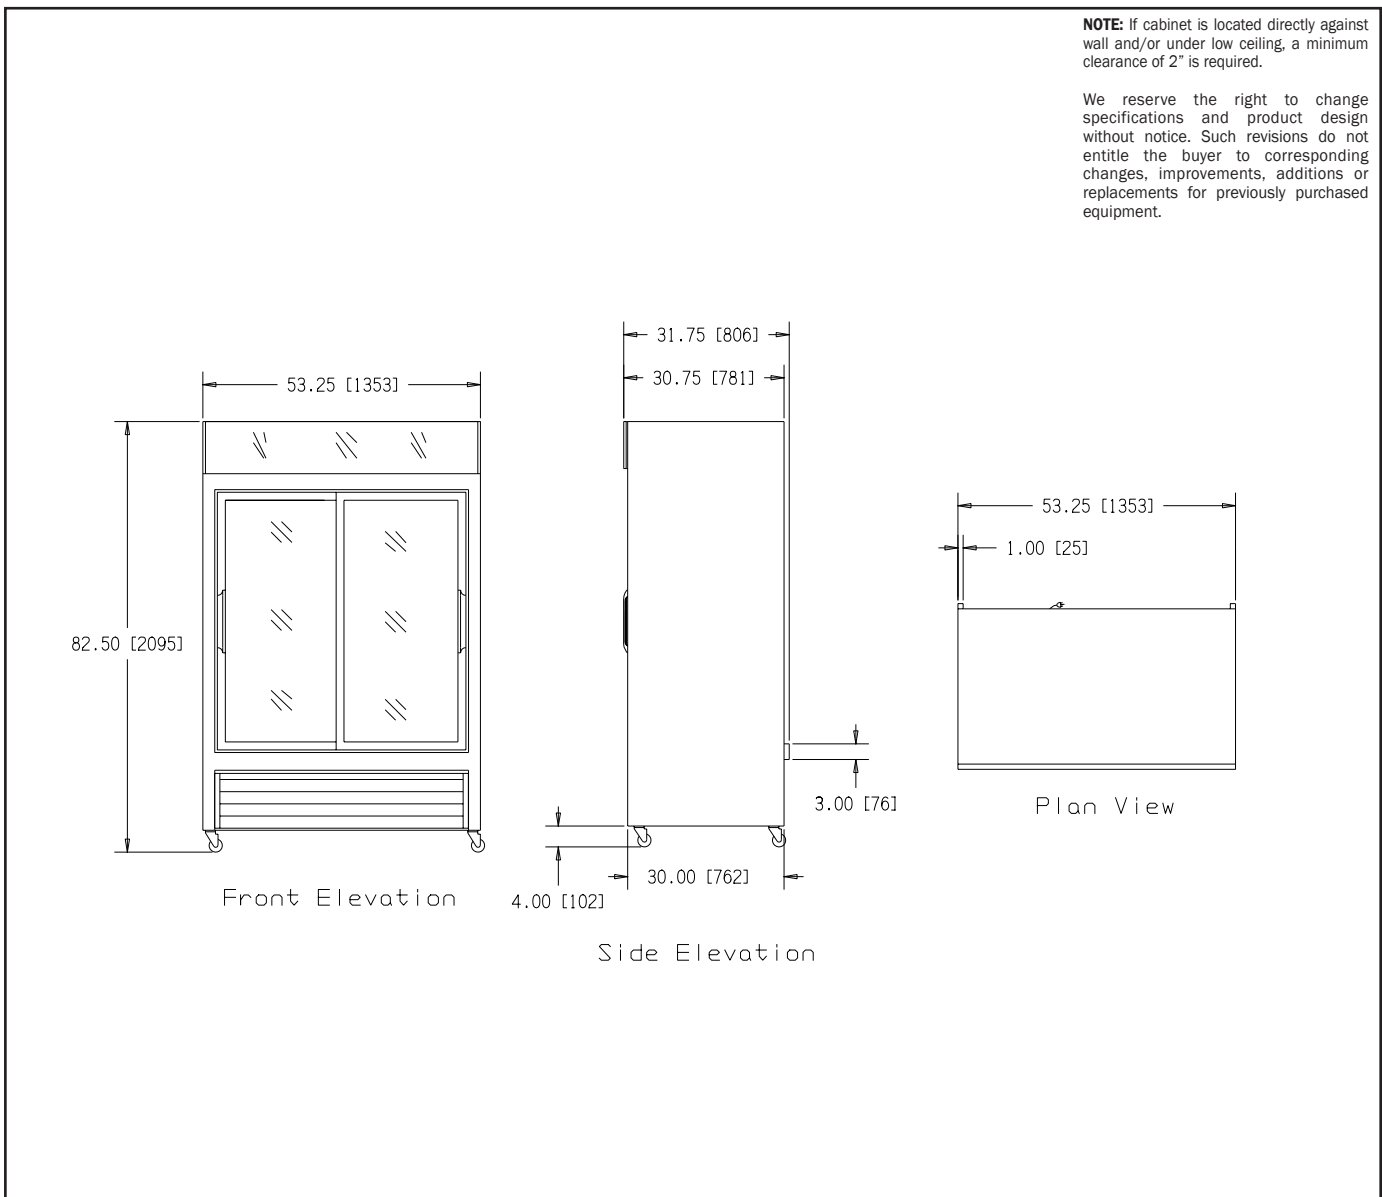

Continuous product development may necessitate specification changes and design without notice.



Victory participates in the KCL CADalog, the most current source of CAD symbols for foodservice designers worldwide. Symbols include standard equipment in plan, side, front and 3-D views, layered for FEDA/FCSI recommended guidelines.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>