


UNIVERSITY

2007

Campus Security Products

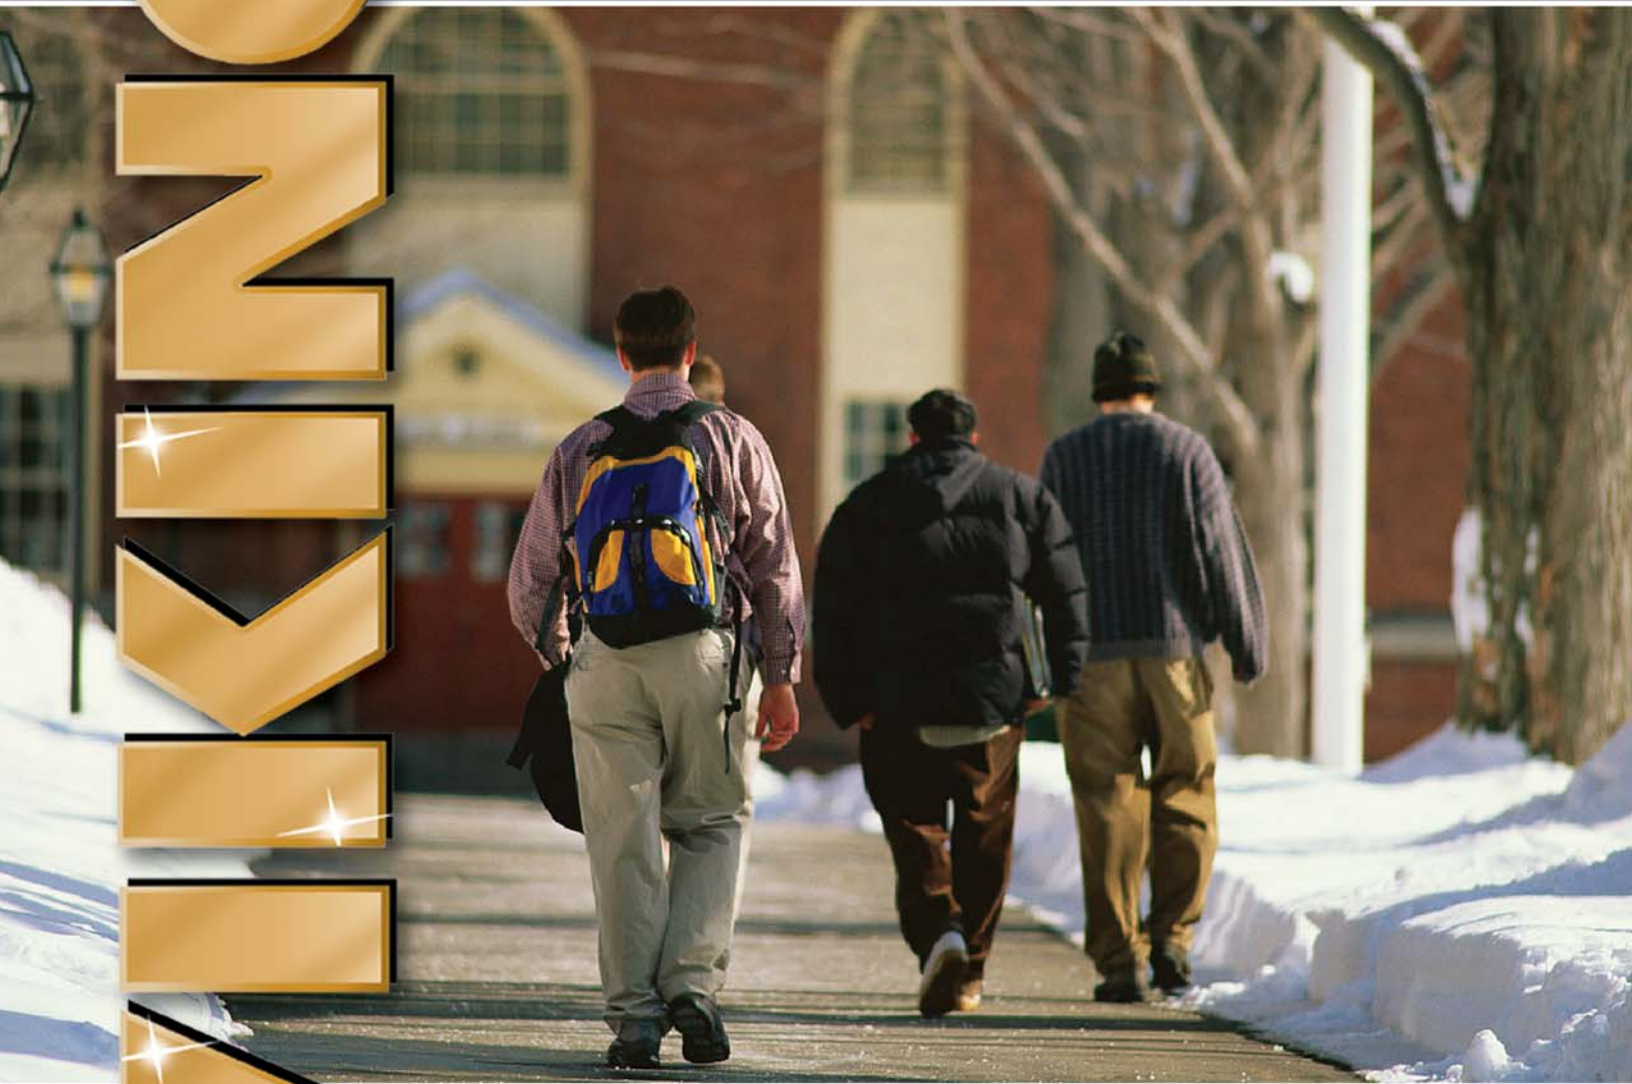

Mass Notification • Alarm Dialers
Emergency Phones • Access Control



Manufactured in the USA / American Technical Support

MASS NOTIFICATION / ALARM DIALERS: 3

EMERGENCY / ELEVATOR PHONES: 4-5

EMERGENCY PHONE ENHANCEMENTS: 6

ACCESS CONTROL / DOOR ENTRY: 7-10

OUTDOOR ENCLOSURES: 11

How to Contact Us:

Information: 715.386.8861
 Online: www.vikingelectronics.com
 Email: info@vikingelectronics.com
 FaxBack: 715.386.4345

All Viking products are in-stock nationwide through distributors listed on the back cover.

NEW: "Document on Demand" Search

Viking wants to make it easy for you to get the product information you need, so we've added a new search to our website called "Document On Demand" (DOD). All Viking catalogs and literature have "Fax Back Numbers" to allow information to be faxed to you through our automated system, now the same numbers can be entered on our homepage for a direct link to product cut sheets.

One number, two easy ways to get information: Online or FaxBack

Document on Demand:

*Look for **DOD** numbers throughout this catalog!*



When to Use Viking Enhanced Weather Protection (EWP) Products


Viking **EWP** products are designed to be used in high-humidity, wet or exposed locations and corrosive or high pollution environments.

Typical applications include outdoor emergency or entry phones, roadside assistance and parking garage phones or phones located in salt-air environments near the ocean.

EWP product's electronics are encapsulated in clear urethane. The field adjustable trim pots and dip switches are sealed as are the LED, push button and microphone connections. The mylar speakers have a special weatherproof gasket. Finally, the weatherproof connectors are filled with an anti-corrosive sealing gel.

All **EWP** products conform to **NEMA 3R** requirements.

To order a Viking **EWP** product, add the suffix "-EWP" to the model number.

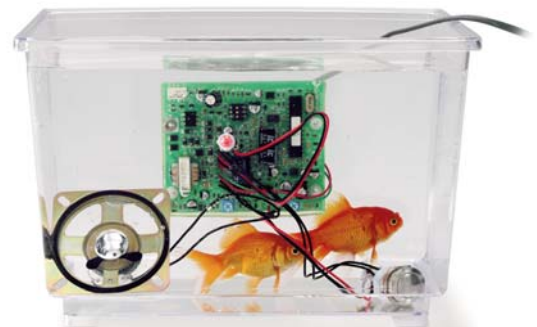

EWP product shown working underwater.

Mass Emergency Notification Announcer - Model DNA-510

Provide Digitally Recorded Mass Notification / Evacuation Messages and Alert Tones Over Your Existing Paging System

- Securely activate, reset or live page from a remote phone
- Alert tone and message repeat 1-99 times or until reset
- Local or remote record up to 5 different messages
- Up to 2 minutes of total message record time
- Select from up to 10 different alert tones
- Non-volatile memory (no batteries required)
- Call progress detection for automatic hang up on CPC, busy signal, dial tone or silence
- Automatically interrupts current page or background music to inject notification announcements, alert tones or live page
- Trigger input to activate a single message and/or alert tone
- N.O. and N.C. trigger output contacts for activating a flashing beacon, alarm dialer, etc.
- Power supply included

Alert Tone Applications:

- Evacuation
- Lockdown
- Severe Weather
- Hazardous Materials
- Terrorist Alert
- Fire
- Tornado
- Flash Flood
- All Clear



Model	Description	*DOD #
DNA-510	Mass Notification Announcer	492

30 Watt Paging Amp with Loud Ringing - Model PA-30

Add Paging and Loud Ringing with Background Music to Any Phone System

- Compatible with model DNA-510 (above)
- 30 Watts of paging power to drive up to 30 8-ohm speakers
- 70V output can drive up to 50 70V speakers
- 4 different ringing sounds available
- Provides background music from an external source
- 600 ohm output to drive additional amplifiers
- Use multiple units for more paging power, power supply included

Ringing Sounds:

- Electronic Warble
- Double Gong
- Quadruple Chime
- Door Chime



Model	Description	*DOD #
PA-30	30 Watt Paging Amp	489

Multi-Input Voice Dialers - Models K-202-DVA and K-2000-DVA

Voice Alarm Dialing or Store Caster Announcements

- Non-volatile memory (no batteries required)
- Local or remote programming/recording and remote security/access codes
- Programmable message repeat counter, call progress detection
- Phone numbers may be programmed as pager numbers
- Programmable hookswitch flash before dialing
- Power supply included

K-202-DVA Features

- Two inputs, NO or NC, enabled or disabled
- Stores up to seven 32-digit phone numbers per input (14 total)
- 2 minutes of record time (1 minute per input)

K-2000-DVA Features

- Eight inputs, NO or NC, enabled or disabled
- Stores up to eight 32-digit phone numbers per input (64 total)
- 8 minutes of record time (1 minute per input)
- Store caster mode and RS-232 port for programming via a PC



Model K-202-DVA



Model K-2000-DVA

Model	Description	*DOD #
K-202-DVA	2-Input Alarm Dialer	305
K-2000-DVA	8-Input Alarm Dialer	303

Handsfree Emergency Phones - Models E-1600A and E-1600-45A

ADA Compliant with Braille Label and "Call Connected" LED

General Emergency Phone Features and Operation:

- Automatically dials 1-20 digit numbers
- Automatically dials up to 4 other numbers if the call is not answered or is busy
- Integral 16 second digital voice location announcer
- Program and record remotely from a touch tone phone
- Phone numbers and announcements are stored in non-volatile memory
- Compatible with Central Station Monitoring
- Disconnects on silence, busy, dial tone, CPC or time out
- Temperature range (-30°F to 150°F)

- Material: .062" (16 gauge) steel, powder painted
- Mounting: Surface mount to walls, posts, single gang boxes or recess mount in elevator phone boxes
- Optional Enhanced Weather Protection (EWP) (see page 2)
- Two-wire installation - phone line powered
- Dimensions: 5.25" x 4.0" x 2.0"



E-1600-45A
Safety Yellow

E-1600A
Emergency Red

Model	Description	*DOD #
E-1600A	Emergency Red Phone	215
E-1600-45A	Safety Yellow Phone	215

Vandal Resistant Handsfree Emergency Phone - Model E-1600-03B

ADA Compliant with Braille Label and "Call Connected" LED

General Emergency Phone Features and Operation:

(refer to model E-1600A above)

- Material: .074" (14 gauge) brushed stainless steel
- Mounting: Surface mount to walls, posts, single gang boxes or recess mount in elevator phone boxes
- Optional Enhanced Weather Protection (EWP) (see page 2)
- Two-wire installation - phone line powered
- Dimensions: 7.22" x 5.86" x 1.55"

Model	Description	*DOD #
E-1600-03B	Stainless Steel Emergency Phone	215



Two-Button Handsfree Emergency Phone - Model E-1600-20A

ADA Compliant with Braille Label and "Call Connected" LED

General Emergency Phone Features and Operation:

(refer to model E-1600A above)

- A second button dials up to 3 additional numbers for general information or directions
- Front Panel Material: 14 gauge brushed stainless steel
- Mounting: Flush mount with included plastic rough-in box, or surface mount with optional VE-5x5 backbox (page 11)
- Optional Enhanced Weather Protection (EWP) (see page 2)
- Two-wire installation - phone line powered
- Dimensions: 5.0" x 5.0" x 2.25"

Model	Description	*DOD #
E-1600-20A	Two-Button Emergency Phone	215



E-1600-20A shown in optional VE-5x5 surface mount box (page 11)

42" Handsfree Emergency Tower Phone - Model E-1600A-BLT-EWP

ADA Compliant with Braille Label, "Call Connected" LED and Blue Strobe Light

General Emergency Phone Features and Operation:
(refer to model E-1600A on page 4)

- 1,000,000 candle power strobe, maximum Strobe Power Run: 200 feet using 24 awg wire
- Mounting: Surface mount to rigid wall or post
- Material: Enclosure - .125 aluminum, 76.2mm x 152.4mm (3" x 6") tube, powder painted high- visible yellow, Phone - .074 (14 gauge) stainless steel with stainless steel button, Strobe - Vandal resistant polycarbonate plastic
- Connections: Color-coded wires with gel-filled butt connectors
- Enhanced Weather Protection (EWP) standard and power supply included
- Two-button version available with "Info" and "Help" buttons
- Dimensions: 42" x 6" x 4.5"



Model	Description	*DOD #
E-1600A-BLT-EWP	42" Yellow Tower Phone	217
E-1600A-BLT2EWP	Two Button 42" Yellow Tower Phone	217

Replacement Phone for Talk-A-Phone Applications - Model E-1600A-TP-EWP

ADA Compliant with Braille Label and "Call Connected" LED

General Emergency Phone Features and Operation:
(refer to model E-1600A on page 4)

- Direct replacement for the Talk-A-Phone ETP-400(V) panel phone, Code Blue towers require redrilling and tapping
- Front Panel Material: 11 gauge brushed stainless steel
- Mounting: Flush mount to Talk-A-Phone ETP towers, wall mounts, boxes and pedestals
- Phone line powered and Enhanced Weather Protection (EWP) standard
- Provides contact or switched 12 VDC for controlling a strobe light, power supply included
- Dimensions: 9.5" x 11.75" x 2.0"



Model	Description	*DOD #
E-1600A-TP-EWP	Talk-A-Phone Replacement	218
E-1600A-TP2-EWP	Two-Button Talk-A-Phone Replacement	218

Handfree Speaker Phones with Dialer - Models E-30 and E-35

Ideal for Communicating with Class Rooms

- Automatically dials 1-20 digit numbers
- Automatically dials up to 4 other numbers if the call is not answered or is busy
- Model E-30 has two-wire installation - phone line powered
- Model E-35 has an integral high resolution color video camera with wide viewing angle, and tilt/swivel adjustments
- E-35 operates up to 150 ft on CAT 5 cable - power supply included
- Disconnects on silence, busy, dial tone, CPC or time out
- Selectable auto-answer feature and push button disconnect
- Optional Enhanced Weather Protection (EWP) (see page 2)
- Phone numbers are stored in non-volatile memory
- Program remotely from a touch tone phone
- Optional surface mount box available, model VE-5x5
- Temperature range (-30°F to 150°F)
- Dimensions: 5" x 5" x 2.25"



E-30 shown in optional VE-5x5 surface mount box (page 11)



E-35 shown in optional VE-5x5 surface mount box (page 11)

Model	Description	*DOD #
E-30	Handsfree Speaker Phone	212
E-35	E-30 with Color Video Camera	178

Blue Strobe Light Kit - Model BLK-3-EWP

Provide Strobe Light Indication of Line Status

- Includes LDB-3 control module with Enhanced Weather Protection (EWP)
- Durable polycarbonate lens
- Long life 1 million candle power blue strobe light
- Flush mount or surface mount with weatherproof single gang box (included)
- Can be configured to signal: ringing, off-hook or a combination of both ringing and off-hook (line-in-use)
- Selectable ring cadence mode



Model	Description	*DOD #
BLK-3-EWP	Blue Strobe Light Kit	653

Line Sharing Device - Model LSD-2

A Smart Line Sharing Device with Inbound Switching Capability

- Adjustable disconnect time
- Allows an emergency device to share a phone line with other devices
- Gives priority to the emergency devices
- Provides a busy signal to the phone port when an emergency device is in use
- Incoming calls are routed to one of two ports via caller ID, distinctive ring, or quick call back



Model	Description	*DOD #
LSD-2	Line Sharing Device	262

Strobe Controller- Model SC-911

Activate a Strobe Light with a Call to 911 -
Save valuable seconds on EMS response times!

- Detects 911, 9911, 8911, 555 (test) calls and/or a custom activation number
- Bright 0.75" red LED visible over 100 feet, reset by dialing any touch tone
- Switched 12VDC output for powering strobe lights, cameras, etc.
- One set of N.O. or N.C. relay contacts provided
- Use with Viking strobe light model SL-1
- Dimensions: 2.9" x 2.1" x 1.4"



Model SL-1



Model SC-911

Model	Description	*DOD #
SC-911	911 Strobe Controller	236
SL-1	Strobe Light	240

Panic Button Kit - Model PB-1

Emergency Phone Panic Button Kit

- Fully modular for quick plug-in installation
- Unobtrusive - mount anywhere at any angle with the supplied foam tape
- Provides security and peace of mind
- Applications include: courtrooms, bank tellers, gas stations, motel reception desks, all night restaurants, convenience stores, etc.



Model	Description	*DOD #
PB-1	Panic Button Kit	233

Single Entry Phone Controller - Model C-200

Allows Your House Phones or Phone System to Share a Phone Line / VoIP Adapter with a Single Viking Entry Phone

- House phones ring with C.O. line cadence or distinctive ring when the entry phone "Call" button is pressed
- Provide entry phone activated chimes and whole house paging when used with an SLP-1 Single Line Paging Controller
- Produces double "Call Waiting" tones if the entry phone is activated when the house phones are already on a call
- One set of normally open and normally closed contacts available for operating a doorbell, camera, lights, etc.

Compatible with these Viking entry phones:

- E-10A (page 9)
- E-20B (page 9)
- E-30 (page 5)
- E-35 (page 5)
- E-40 (page 9)
- E-50 (page 9)



Model	Description	*DOD #
C-200	Single Entry Phone Controller	169

Advanced Door or Gate Entry Phone Controller - Model C-2000A

Allows Your House Phones or Phone System to Share a Phone Line / VoIP Adapter with up to 4 Viking Entry Phones

- House phones ring with C.O. line cadence or distinctive ring when the entry phone "Call" button is pressed
- The occupant can "buzz" the visitor in from a touch tone phone
- One set of normally open and normally closed contacts available for each entry phone
- Provide entry phone activated chimes and whole house paging when used with Viking model SLP-1
- Up to 6 different keyless entry codes / "one time use" keyless entry codes per entrance
- Up to 6 master keyless entry codes for use at any entrance
- Provides entry phone "Caller ID" and "Call Waiting Caller ID"
- Produces "Call Waiting" tones if the house phones are in-use
- Lighted doorbell switch input to activate entry phone call
- Programmable contact activation time
- Auxiliary input to activate timed auxiliary contacts

Compatible with these Viking entry phones:

- E-10A (page 9)
- E-20B (page 9)
- E-30 (page 5)
- E-35 (page 5)
- E-40 (page 9)
- E-50 (page 9)
- K-1700-3 (page 8)
- K-1705-3 (page 8)



Model	Description	*DOD #
C-2000A	Advanced Entry Phone Controller	156

Door or Gate Doorbox and CCTV Camera Controller - Model C-1000B

Allows Your Residential or Business Phone System to Share a Phone Line / VoIP Adapter with 2 Viking Doorboxes

- Doorbox triggered CCTV camera switching
- House phones ring with C.O. line cadence or distinctive ring when the entry phone "Call" button is pressed
- The occupant can "buzz" the visitor in from a touch tone phone
- Provides N.O. or N.C. dry contacts (5 amp rating) for each door strike or gate opener
- Keyless entry/postal lock input
- Built-in talk battery for "No C.O. Line" applications
- Auxiliary contact output for doorbells, lights, etc.
- *Analog station mode for use with a Viking entry or emergency phone

Compatible with these Viking doorboxes:

- W-1000 (page 10)
- W-2000A (page 10)
- W-3000 (page 10)
- W-3005 (page 10)
- E-30* (page 5)
- E-40* (page 9)
- E-50* (page 9)
- K-1200* (page 8)



Model	Description	*DOD #
C-1000B	Doorbox & CCTV Controller	168

Handsfree Entry Phone with Keypad - Models K-1700-3 and K-1705-3

Phone Line / VoIP Adapter Powered For Keyless Door and Gate Entry or Apartment Applications

- Vandal Resistant Features: 14 gauge, louvered, stainless steel faceplate with stainless steel speaker/mic screen, heavy duty metal keypad and "Call" button
- Keyless entry requires a C-2000A, C-3000, C-4000 or K-1900-3 controller
- Optional Enhanced Weather Protection (EWP) (see page 2)
- Advanced call progress detection: disconnects on busy signal, return to dial tone, CPC, reorder tone, maximum call time out and selectable silence time out
- Zinc plated steel rough-in box included with 3/4" conduit knockouts
- Selectable auto-answer feature and push button disconnect
- Microphone and speaker volume adjustments
- Model K-1705-3 has an integral high resolution color video camera with wide viewing angle, and tilt/swivel adjustments
- Extended temperature range (-30°F to 150°F)
- Handsfree phone is phone line powered
- Model K-1705-3 operates up to 150 ft on CAT5E cable - power supply included
- Dimensions: 6.5"W x 5.5"H x 2.6"D



K-1705-3 and K-1700-3 shown in optional VE-6x7 surface mount box (page 11)

Model	Description	*DOD #
K-1700-3	Handsfree Entry Phone with Keypad	157
K-1705-3	Video Entry Phone with Keypad	159

Door Entry Dialer / Controller - Model K-1900-3

Provide Door Entry & Keyless Entry for up to 250 Apartments or Offices

- Non-volatile memory (no batteries required)
- Remotely or locally programmable
- Stores up to 250 tenant phone numbers and keyless entry codes
- The tenant can "buzz" the visitor in from a phone or the visitor can use a keyless entry code
- Programmable maximum call timer
- Multi-number dialer mode and ring-thru mode
- N.O. or N.C. (DPDT) relay contacts for controlling door strikes, magnetic locks, gates, etc.
- Always allows 911 and 311 outside calls
- Power supply included



Model	Description	*DOD #
K-1900-3	Door Entry Dialer / Controller	312

Multi-Button Handsfree Entry Phone - Model K-1200

Total Stand Alone Door Entry Solution Services up to 12 Apartments or Offices

- One button operation - just press the button associated with the tenant
- Each button can be programmed to speed dial up to 32 digits
- Integral directory with tenant's name beside each button
- The tenant can "Buzz" the visitor in from a phone - the K-1200 has an internal door strike relay
- Use with Viking C-3000 controller for "no-phone-line" operation
- Use with Viking C-1000B controller for added security
- Optional Enhanced Weather Protection (EWP) (see page 2)
- Operates on 12-24VAC - power supply included
- Rough-in box included
- Blocks hand held touch tone dialers
- Connect to standard phone or PABX line
- Dimensions: 5" x 10" x 2.5"



K-1200 shown in optional VE-5x10-SS surface mount box (page 11)

Model	Description	*DOD #
K-1200	Multi-Button Entry Phone (Model K-1200 will be available third quarter 2007)	182

Compact Handsfree Entry Phones - Models E-40 & E-50

Phone Line / VoIP Adapter Powered Door Entry Phones with Consumer Styling - Commercial Quality



Brushed Stainless Steel E-50



Oil Rubbed Bronze E-50



Polished Brass E-40



Satin White E-40



Satin Black E-40


Model E-50-SS shown in optional VE-3x5 surface mount box (page 11)



- E-40: Two-wire installation
- Five attractive finishes
- Extended temperature range (-30°F to 150°F)
- Compact size for flush mounting in a single gang box (with minimum inside dimensions of: 2"W x 2.84"H x 2.25"D)
- Weather and vandal resistant for outdoor locations
- Optional Enhanced Weather Protection (EWP) (see page 2)
- Intelligent auto disconnect on CPC, busy, dial tone or silence
- VE-3x5 surface mount box available (see page 11)
- Replacement faceplates available in all 5 finishes
- E-50: Audio and video transmission on one CAT5E cable
- E-50: Integral high resolution color video camera
- Dimensions: 3.12"W x 4.87"H x 1.7"D

Compatible with these Viking controllers:

- C-200 (page 7)
- C-2000A (page 7)



Tilt camera up or down, swivel camera left or right, lock in place!

Camera Specifications

Power: 5-9V DC regulated 150mA (6V DC adapter included)
 Tilt/Swivel Adjustment: Vertical +/- 20°, horizontal +/- 30°
 Image Sensor: 1/4" color CMOS
 Video Output: 1 VP-P composite, NTSC, 75 ohms
 Resolution: 420 lines (640 x 480 / 307,200 pixels)
 Sensitivity: 0.26 LUX (20 IRE) F2.0
 Lens: 3.4mm, pinhole 70°FOV

E-40 DOD#: 187

E-50 DOD#: 191

Model	Description	*DOD #
E-40-SS	Stainless Steel Phone	187
E-40-BN	Oil Rubbed Bronze Phone	187
E-40-PB	Polished Brass Phone	187
E-40-WH	Satin White Phone	187
E-40-BK	Satin Black Phone	187

Model	Description	*DOD #
E-50-SS	Stainless Steel Video Phone	191
E-50-BN	Oil Rubbed Bronze Video Phone	191
E-50-PB	Polished Brass Video Phone	191
E-50-WH	Satin White Video Phone	191
E-50-BK	Satin Black Video Phone	191

Handsfree Entry Phones - Models E-10A & E-20B

Phone Line / VoIP Adapter Powered Phones for Parking Ramps, Campuses and Door / Gate Entry

- Two-wire installation
- Auto-disconnects on CPC, silence, busy or dial tone
- Optional Enhanced Weather Protection (EWP) (see page 2)
- Adjustable microphone and speaker volume
- Selectable auto-answer feature for remote monitoring
- Weather resistant features: mylar speaker, gaskets, internally sealed push button switch, UV stable exterior, enamel coated PCB
- Alternate action call button to place or cancel a call
- Surface mount box available for E-10A, model VE-5x5 (see page 11)
- E-10A dimensions: 5"W x 5"H x 2.25"D
- E-20B dimensions: 5.5"W x 4.5"H x 1.5"D

Use with these Viking controllers:

- C-200 (page 7)
- C-2000A (page 7)



E-10A



E-20B

Model	Description	*DOD #
E-10A	Flush Mount Entry Phone	210
E-20B	Surface Mount Entry Phone	210

Handsfree Doorboxes - Models W-1000 & W-2000A

Provides 24 Volt Talk Battery and 20 Hz Ring Generator for Phone System Unused Line Input Applications

- W-1000 Features: Flush mount, vandal resistant, black powder painted, aluminum face plate with heavy duty metal call button, mounting gasket and rough-in box
- W-2000A Features: Light gray colored, impact resistant, U.V. stable, plastic surface mount chassis
- Optional Enhanced Weather Protection (EWP) (see page 2)
- Extended temperature range (-30°F to 150°F)
- High output speaker amplifier with volume adjustment
- Microphone and speaker volume adjustments
- Selectable number of rings (2, 3, 10 or 30)
- Surface mount box available for W-1000, model VE-5x5 (see page 11)
- W-1000 dimensions: 5"W x 5"H x 2.25"D
- W-2000A dimensions: 5.5"W x 4.5"H x 1.5"D

Use with this Viking controller:

- C-1000B (page 7)



W-1000



W-2000A

Model	Description	*DOD #
W-1000	Flush Mount Doorbox	170
W-2000A	Surface Mount Doorbox	170

Stainless Steel Handsfree Doorbox - Model W-3000 & W-3005

Provides 24 Volt Talk Battery and 20 Hz Ring Generator for Phone System Unused Line Input Applications

- Vandal resistant, 14 gauge stainless steel faceplate, heavy-duty metal push button and mounting gasket
- W-3005 has an integral color CCTV camera (see page 9 for complete camera specifications)
- Flush mount using the included rough-in box
- Selectable "Push-to-Talk" feature for noisy environments
- Extended temperature range (-30°F to 150°F)
- Optional Enhanced Weather Protection (EWP) (see page 2)
- Yellow call progress/night light LED
- High output speaker amplifier with volume adjustment
- Microphone and speaker volume adjustments
- Selectable distinctive ring (standard or 2 short rings)
- Selectable number of rings (2, 3, 10 or 30)
- Compact 45° terminal strip for easy wiring
- Dimensions: 5"W x 5"H x 2.25"D

Use with this Viking controller:

- C-1000B (page 7)



W-3005



W-3000

W-3000 & W-3005 shown in optional VE-5x5 surface mount box (page 11)

Model	Description	*DOD #
W-3000	Stainless Steel Doorbox	180
W-3005	Stainless Steel Video Doorbox	181

Panel Phones - Models K-19007 & K-1900-8

Attractive Vandal Resistant Hot Line Panel Phones

- Auto-dials (up to 32 digits) programmable speed dial number
- Touch tone or pulse dialing with a programmable pre-dial pause
- K-1900-8 has a vandal resistant sealed metal keypad
- Vandal resistant 1/8" thick stainless steel panel, armored cable and metal cradle
- Optional Enhanced Weather Protection (EWP) (see page 2), EWP models have 54" armored cord
- Hearing aid compatible amplified handset with sealed push button volume control
- Optional surface mount box available, model VE-5x10 (see page 11)
- Dimensions: 5"W x 10"H x 4"D

Model	Description	*DOD #
K-1900-7	Hot Line Panel Phone	364
K-1900-8	Hot Line Panel Phone with Keypad	362



Outdoor Enclosures - Models VE-9x12 and VE-9x20

Added Protection for Viking Phones

- Heavy-duty cast aluminum construction
 - Gasket sealed door
 - Drip guard
 - 3/4" NPT conduit openings on top and bottom
 - Available in three colors: emergency red, safety yellow, or black
 - Mounting holes for a standard RJ11 wall plate (VE-9x12-1)
 - Hardware included
 - Available with two adapter panels for the VE-9x12 (see below)
 - Optional VE-PBL lock and key set available
- Compatible with these Viking products:




VE-9x12(B/Y/R)-1:	VE-9x12(B/Y/R)-2:	VE-9x20(B/Y/R):
- E-1600A	- E-10A	- K-1500-7
- E-1600-03B	- E-1600-20A	- K-1900-7
- E-1600-45A	- E-30	- K-1900-8
- E-20B	- W-1000	
- K-1500P-W	- W-3000	
- K-1900W-2		
- W-2000A		

Model	Description	*DOD #
VE-9x12B	Black 9x12 Outdoor Enclosure	413
VE-9x12Y	Yellow 9x12 Outdoor Enclosure	413
VE-9x12R	Red 9x12 Outdoor Enclosure	413
VE-9x20B	Black 9x20 Outdoor Enclosure	413
VE-9x20Y	Yellow 9x20 Outdoor Enclosure	413
VE-9x20R	Red 9x20 Outdoor Enclosure	413

Backboxes and Outdoor Accessories

- Surface mounts to a wall, post or single gang box
 - VE-5x5 mounts to a single or double gang box
 - VE-5x5, VE-6x7 and VE-5x10 mount to the VE-GNP gooseneck pedestal
 - VE-GNP constructed of 14 gauge CRS steel tubing
 - Adds weather and vandal resistance
 - Heavy duty, black powder painted steel or stainless steel
- Compatible with these Viking products:

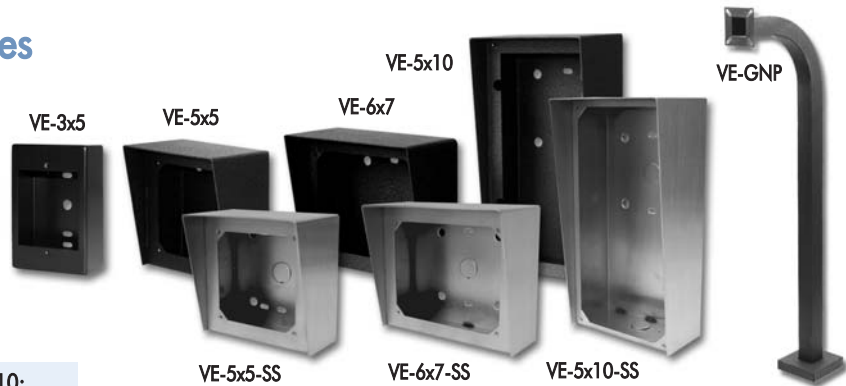

VE-3x5:	VE-5x5:	VE-6x7:	VE-5x10:
- E-40	- E-10A	- K-1700-3	- K-1200
- E-50	- E-30	- K-1705-3	- K-1205
	- E-30-PT		- K-1500-7
	- E-35		- K-1900-7
	- E-1600-20A		- K-1900-8
	- W-1000		
	- W-3000		

VE-GNP:	VE-LIGHT:
- VE-5x5 - VE-6x7 - VE-5x10	- VE-5x5 - VE-6x7 - VE-5x10 - E-1600A-BLT-EWP

- VE-LIGHT has ultra-bright LED's for long life
- Easy retro-fit to existing entry phones

VE-LIGHT shown alone below and in conjunction with the E-30 and VE-5x5 right



Model	Description	*DOD #
VE-3x5	Black Surface Mount Box	424
VE-5x5	Black Surface Mount Box	424
VE-6x7	Black Surface Mount Box	424
VE-5x10	Black Surface Mount Box	424

Model	Description	*DOD #
VE-5x5-SS	Stainless Steel Surface Mount Box	424
VE-6x7-SS	Stainless Steel Surface Mount Box	424
VE-5x10-SS	Stainless Steel Surface Mount Box	424
VE-GNP	Gooseneck Pedestal	424
VE-LIGHT	Enclosure Lighting Kit	428

Campus Security Products

Campus security budgets have increased over the past decade, but not nearly as fast as the increase in threat levels. That's put you in a tight spot. We can help. Viking products are reliable and cost effective. So you can increase security on your campus and stay within budget.

Viking security products have proven themselves in the field for over 35 years. That's not just our opinion, it's a fact. Our customers tell us that our Enhanced Weather Protection (EWP) technology provides significantly longer service life than similar products from our competitors. That means Viking is the right choice today and years down the road. Add our outstanding US based customer service and technical support to the mix and you can see why Viking is your best choice for campus security products.

Whether you're considering our mass notification announcers, our extensive line of emergency phones or our door access control products, you can be sure that Viking has the product you need at a price that will fit your budget.

Viking products are in stock at the following distributors:

Graybar
800-825-5517 • www.graybar.com

ADI
800-233-6261 • www.adilink.com

Anixter
800-323-8167 • www.anixter.com

Jenne Distributing
800-422-6191 • www.jenne.com

TeleDynamics Corporation
800-847-5629 • www.teledynamics.com

Target Distributing
800-873-5528 • www.targetdist.com

Windstream Supply
800-533-3161 (US/CANADA)
www.windstreamsupply.com

Communications Supply
800-786-9584 • www.gocsc.com

Hall Telecommunications
519-822-5420 • www.halltel.com
800-265-2667 (CANADA)

Goldcom, Inc.
800-788-8848 • www.Gold-com.com

Capitol Sales
800-467-8255 • www.capitolsales.com

NTD Distributors
800-426-1024 • www.ShopNTD.com

HB Distributors
800-266-3478 • www.HBdistributors.com

High Tech Communication
800-256-3010 • www.high-techcomm.com

Power & Telephone
800-238-7514 • www.ptsupply.com

International Sales: Viking International
612-331-3823 • www.vikingelectronics.com

Download from www.Somanuals.com. All Manuals Search And Download.

Viking Electronics, Inc.
1531 Industrial Street
Hudson, Wisconsin 54016
Printed in the USA

Address Service Requested

PSRST STD
U.S. POSTAGE
PAID
LA CROSSE, WI
PERMIT NO. 25

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>