

VINO1500CD, CTED VINO2500CD, CTED Installation Instruction

1. Location

- Place the wine cellar in a properly ventilated location. Otherwise, heat exhausted by the cooling unit will build up and it will not operate properly.
- The exhaust area must not be closed space and must be ventilated.

1) Rear Exhaust

- Leave min 6" clearance from the rear to the wall.
- Leave min 12" clearance from the top to the ceiling.
- Leave min 6" clearance from the left and right sides.

2) Front Exhaust

- Leave min 6" clearance from the front if left and right sides unobstructed.
- Or, leave min 36" clearance from the front if left and right sides obstructed


3) Top Exhaust

- Leave min 12" from the top to the ceiling.
- Leave min 2" clearance from the rear to the wall.
- Leave min 2" clearance from the left and right sides.

4) Side Exhaust

- Leave min 6" clearance from the left or right side to the wall.
- Leave min 12" clearance from the top to the ceiling.

2. Installation

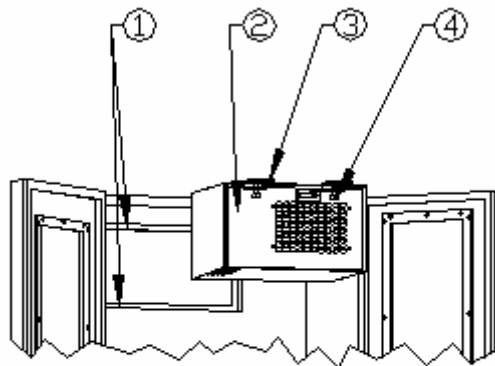

1. GASKET
2. COOLING UNIT
3. MOUNTING BRACKET
4. MOUNTING SCREW

Fig. 2.1 COOLING UNIT MOUNTING

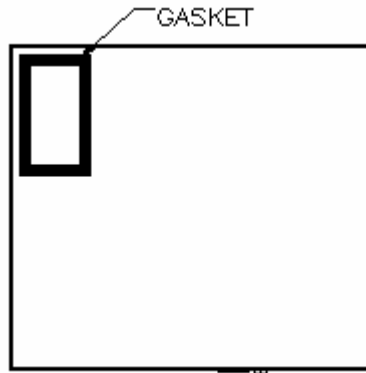


Fig. 2.2 TOP EXHAUST GASKET

- Cut a rectangular opening with the ¼" clearance at the rear of wine cabinet to the width and height of the cooling unit.
- If top exhaust, cut a rectangular opening at the top of the cabinet to the length and width of the top exhaust openings.
- Mount the gaskets on the four mounting sides.
- If top exhaust, place the gaskets along the top openings at the top of the cooling unit.
- Place the cooling unit to a flat and stable place.
- Then move it on the top of the rack temporarily.
- Move the cooling unit towards the mounting sides and push to compress the gasket.
- Locate the 3 brackets (6) and use 7/16" wrench to tighten the 3 screws (7).
- Screw the exhaust and fresh air grille on the opening from the rear side of the cabinet.
- If top exhaust, install the top exhaust grille at the top of the cabinet.
- Plug the cooling unit in receptacle.
- Screw the 2 screws (4) and locate the light on the ceiling.
- Plug the light in receptacle.
- Plug the wine cabinet.

3. Electrical Cord

- We strongly recommend against the use of an extension cord. However, if you still select to use an extension cord, it is absolutely necessary that it is a UL LISTED 3-wire grounding type appliance extension cord. The marked rating of the extension cord should be 115 V, 15 A. or equivalent and not greater than 15ft in length.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>