


engineering specifications

Model PR-7015



Active Elements 31
 Boom Length 87.75"
 Turning Radius 69"
 Maximum Width 111" **Net Weight** 5.7 lbs.
 Vertical Height 25.5" **Shpg. Weight** 8.5 lbs.
 Element Diameter 3/8" **Carton Dimensions** 6.25"x6.25"x89"

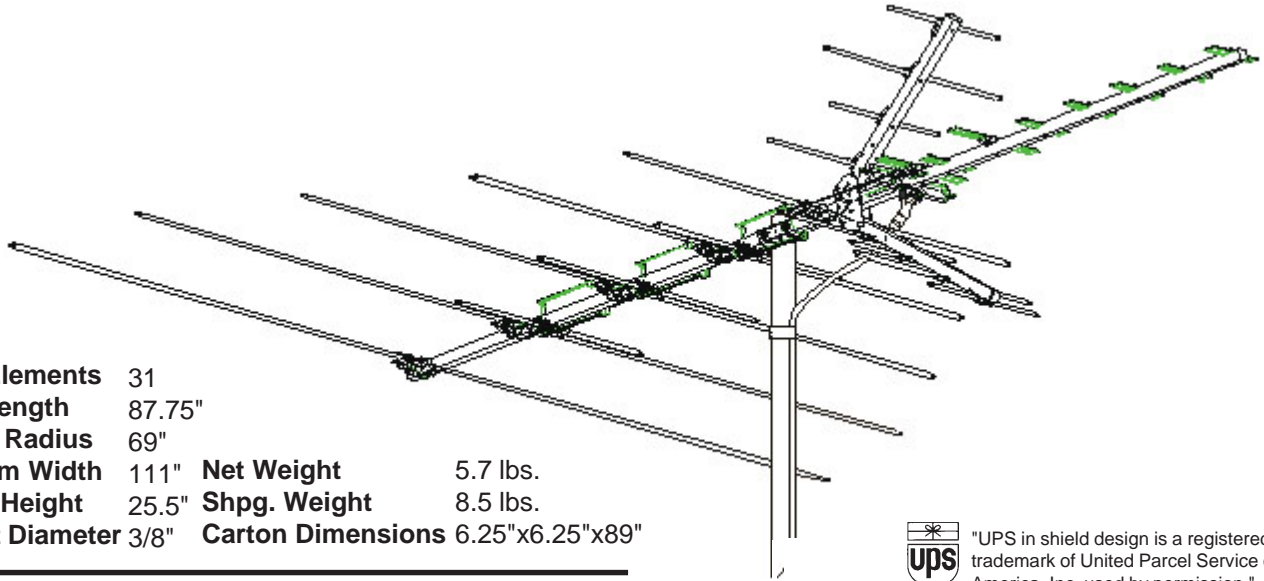


"UPS in shield design is a registered trademark of United Parcel Service of America, Inc. used by permission."

Output Impedance: 300 ohm / 75 ohm with included matching transformer
Recommended Preamp: AP Series

Made in U.S.A.

CHANNEL	CH.2	CH.4	CH.6	CH.7	CH.9	CH.11	CH.13	CH.14	CH.32	CH.50	CH.69
dB gain over reference dipole	3.9	4.1	2.5	7.5	7.5	8	7	9.4	9.9	9.8	8.2
beamwidth at half power points	75°	74°	77°	32°	32°	47°	40°	57°	54°	38°	25°
front-to-back ratio	10.5dB	12dB	13dB	13dB	12.5dB	8dB	14.5dB	14dB	17dB	greater than 20dB	13dB

POLAR PATTERNS

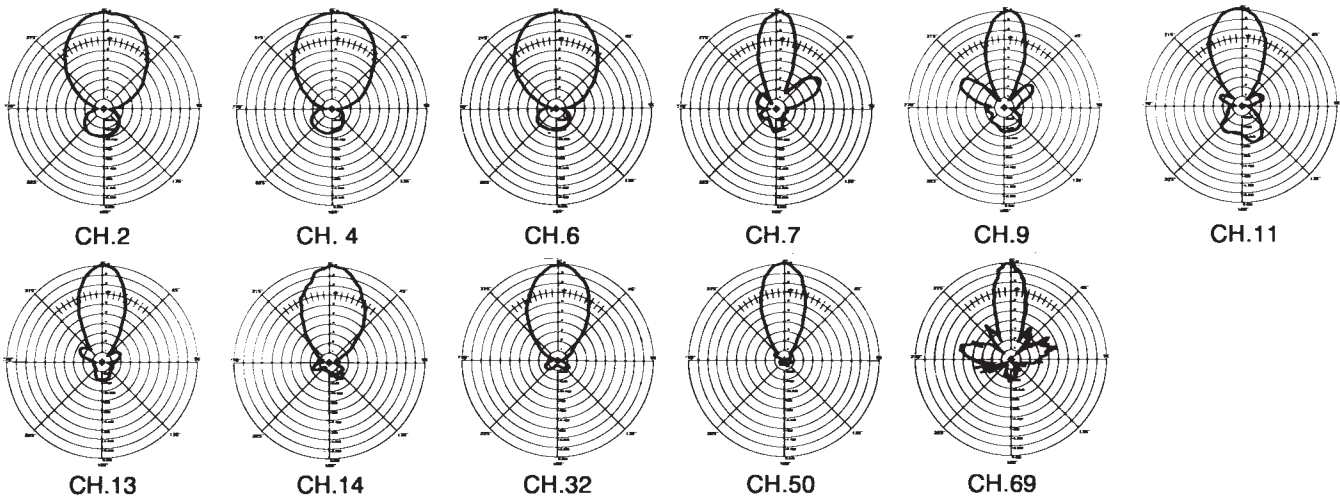

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>