



36" Gas Rangetops

Wolf gas rangetops offer that professional look but give you the flexibility to use ovens in other locations in the kitchen. Wolf gas rangetops have standard features such as dual brass surface burners and our signature large red control knobs. Optional infrared charbroiler and infrared griddle give you the freedom to customize your gas rangetop. Wolf gas rangetops are available in natural or LP gas.



Model RT364G shown.



Model RT366



Model RT364C



Model RT364G

FEATURES

- Stainless steel exterior finish.
- Optional infrared charbroiler and infrared griddle configurations.
- Distinctive red control knobs with chrome bezels — black knobs optional.
- Dual brass burners with automatic reignition at all settings.
- Porcelain-coated cast iron grates.
- Stainless steel drip tray.

FEATURES

Model	RT366	RT364C	RT364G
Surface Burners 16,000 Btu high / 500 Btu simmer	6	4	4
Infrared Charbroiler – 16,000 Btu		•	
Infrared Griddle – 18,000 Btu			•

Model numbers are for natural gas rangetops, add (-LP) to the model number for LP gas.


ACCESSORIES

- 10¹/₂" stainless steel riser.
- Black control knobs.
- 2 or 3 piece trim.
- Porcelain-coated cast iron wok grate.
- Porcelain-coated cast iron S-grates.
- Hardwood cutting board (griddle model only).
- Griddle cleaning kit.



This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.

Accessories are available through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.



Infrared griddle.




Dual brass burner.



36" Gas Rangetops

OVERALL DIMENSIONS

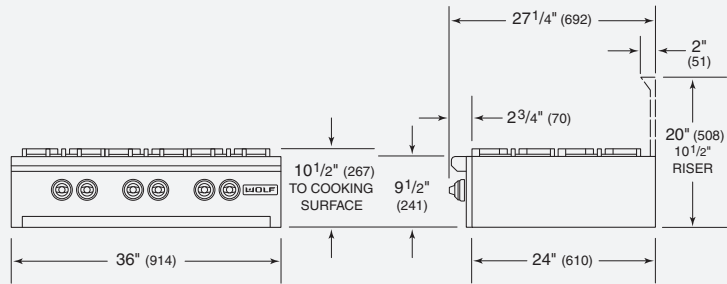


Unit dimensions may vary by $\pm 1/8$ ".

SPECIFICATIONS

Exterior Finish	Stainless Steel
Overall Width	36"
Overall Height (to cooking surface)	10 1/2"
Overall Depth	27 1/4"
Opening Width	36 1/4"
Opening Height (to countertop)	9 1/2"
Opening Depth	24"
Electrical Requirements	110/120 V AC 60 Hz, 15 amp circuit
Shipping Weight	190–220 lbs

INSTALLATION SPECIFICATIONS

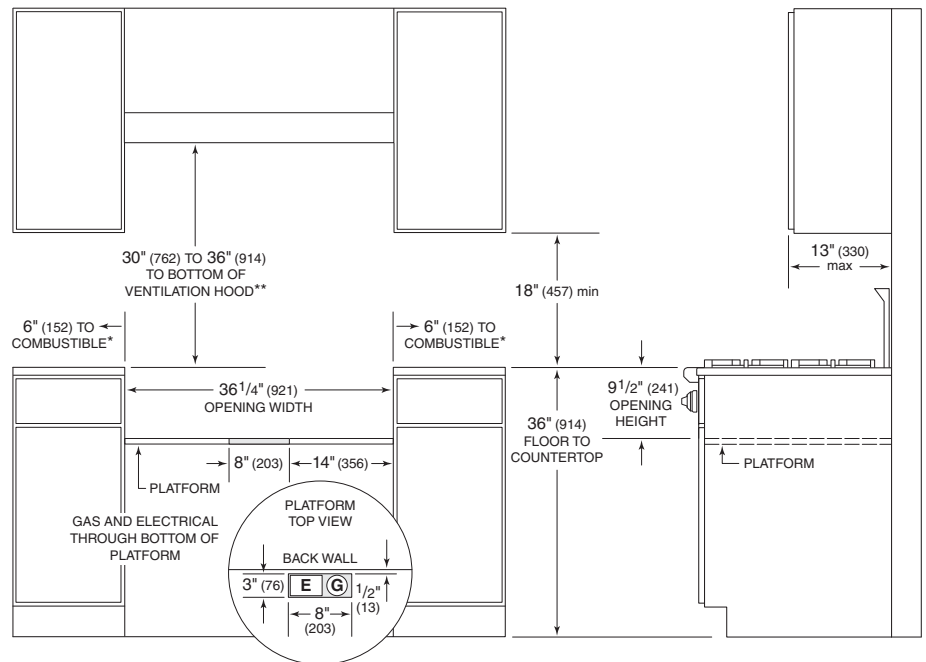

*Minimum clearance from rough opening to combustible materials up to 18" (457) above countertop.

**36" (914) minimum clearance, 44" (1118) for charbroiler, from countertop to combustible materials without ventilation hood.

NOTE: For island installations, 12" (305) minimum clearance from back of rangetop to combustible rear wall above countertop.

INSTALLATION NOTES

- A 10 1/2" riser is required for installations against a combustible surface.
- A Wolf pro wall, chimney, island ventilation hood or hood liner is recommended.

Dimensions in parentheses are in millimeters unless otherwise specified.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>