

RANGE COMPOSITION

The range consists of 2 models of 1200 litre refrigeration cabinets that offer the highest standards in performance and efficiency. Models are available in fan assisted negative or freezer versions with full doors.



110753

PT S SERIES

1200 LITRES REFRIGERATORS **ZANUSSI** PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Internal and external structure in 430 AISI stainless steel, external base, top and back in 430 AISI stainless steel. 2" height-adjustable 304 AISI stainless steel feet (-10 to +80 mm).
- ◆ Digital control panel featuring temperature display and thermostat to view and adjust the internal temperature. Button to adjust the humidity level to ensure excellent conservation of foods (negative model only).
- ◆ Completely automatic defrosting and automatic evaporation of defrost water obtained by hot gas.
- ◆ High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet, internal side panels made of only two metal sheets, bottom panel in only one pressed piece with water drain, and easily removable runners and grids (without the use of tools).
- ◆ The refrigeration system consists of a single unit (compressor, condenser and evaporator) which can be accessed by lifting up the upper front panel at the top. The refrigeration unit can operate in tropical climates (+43°C ambient temperature for stainless steel doors).
- ◆ Easy access to the main components thanks to the openable top front panel.


CHARACTERISTICS	MODELS	
	ASN220 110753	ASF220 110754
Operating temperature - min/max °C	-2/10	-24/-15
Operating mode	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - l.	1200	1200
External dimensions - mm		
width	1500	1500
depth/with open doors	700, 1380	700, 1380
height	2050	2050
Internal dimensions - mm		
depth	570	570
height	1440	1440
Min/Max internal humidity - %	75/90	
N° and type of door	2	2
Door hinges	1 Left+1 Right	1 Left+1 Right
N° and type of grids (included)	8, 530x530	8, 530x530
Compressor power - HP	3/8	1
N° defrost in 24 hrs.	4/28'	4/28'
Refrigerant type	R134a	R404a
Refrigerant quantity - g.	360	400
Refrigeration power - W	512	1150
Power - kW		
installed-electric	0.513	0.96
Noise level - dBA	54	50
Net weight - kg.	220	220
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50
INCLUDED ACCESSORIES		
GREY RILSAN GRID FOR 550/1200-L.REFR.	8	8
SET OF 2 S/S RUNNERS FOR 550/1200-L.REF.	8	8

- ◆ Excellent forced air cooling system with hidden evaporator which provides a higher storage capacity and ensures the utmost uniformity of the temperature in the cabinet and guarantees a perfect storage quality of the goods.
- ◆ High-density expanded polyurethane insulating foam, 75 mm in thickness, with cyclopentane injection, guarantees exceptional, long-term insulation and notable energy savings.
- ◆ The rational use of the internal space of the refrigerator guarantees a large storage area suitable to contain 530x530 mm grids.
- ◆ Reversible self-closing door, in positions less than 90°, with a stop at 95° and a maximum opening at 180°, equipped with a magnetic door seal to guarantee perfect closure. The pressed stainless steel recessed door handle without joints makes opening the cabinet extremely easy. All the doors are fitted as standard with locks and keys and a microswitch to switch off the fan when the door is opened.
- ◆ Internal lighting standard on all models.
- ◆ On request, each refrigerator can be supplied with a remote condenser unit, which can be installed up to a distance of 15 m from the cabinet. Remote units are ideal for use in critical ambient conditions (over 43°C or in areas with insufficient ventilation) or for connection to centralized refrigeration plants. Glass door versions are also available on request.
- ◆ A wide range of optional accessories are available.
- ◆ CFC and HCFC free.
- ◆ All models comply with the standards required by the main international approval bodies and are CE marked.

ACCESSORIES	MODELS	
	ASN220 110753	ASF220 110754
1/1 GN RILSAN STEEL WIRE BASKET H=150 MM	881043	881043
4 SWIVELLING WHEELS (2 W/ BRAKE)	880178	880178
CHROME GRID+RUNNERS FOR 550/1200-L. REFR.	881470	881470
ENERGY FREE ALARM DEVICE	881089	881089
GREY RILSAN GRID FOR 550/1200-L.REFR.	880723	880723
GREY RILSAN GRID+RUNNERS FOR 550/1200 L	881472	881472
HACCP ADV.CONN.10 UNITS-DIG.REF.(ID9XX)	880119	880119
HACCP ADV.CONN.80 UNITS-DIG.REF.(ID9XX)	880132	880132
HACCP ADV.CONN.PER UNIT-DIG.REF.(ID9XX)	880133	880133
KIT PLINTH TO INSTALL HD REF. 1200/1400	880207	880207
PEDAL OPENING FOR 1200/1400 L REFRIGER.	881459	881459
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457
SET OF 2 S/S RUNNERS FOR 550/1200-L.REF.	881471	881471



www.zanussiprofessional.com



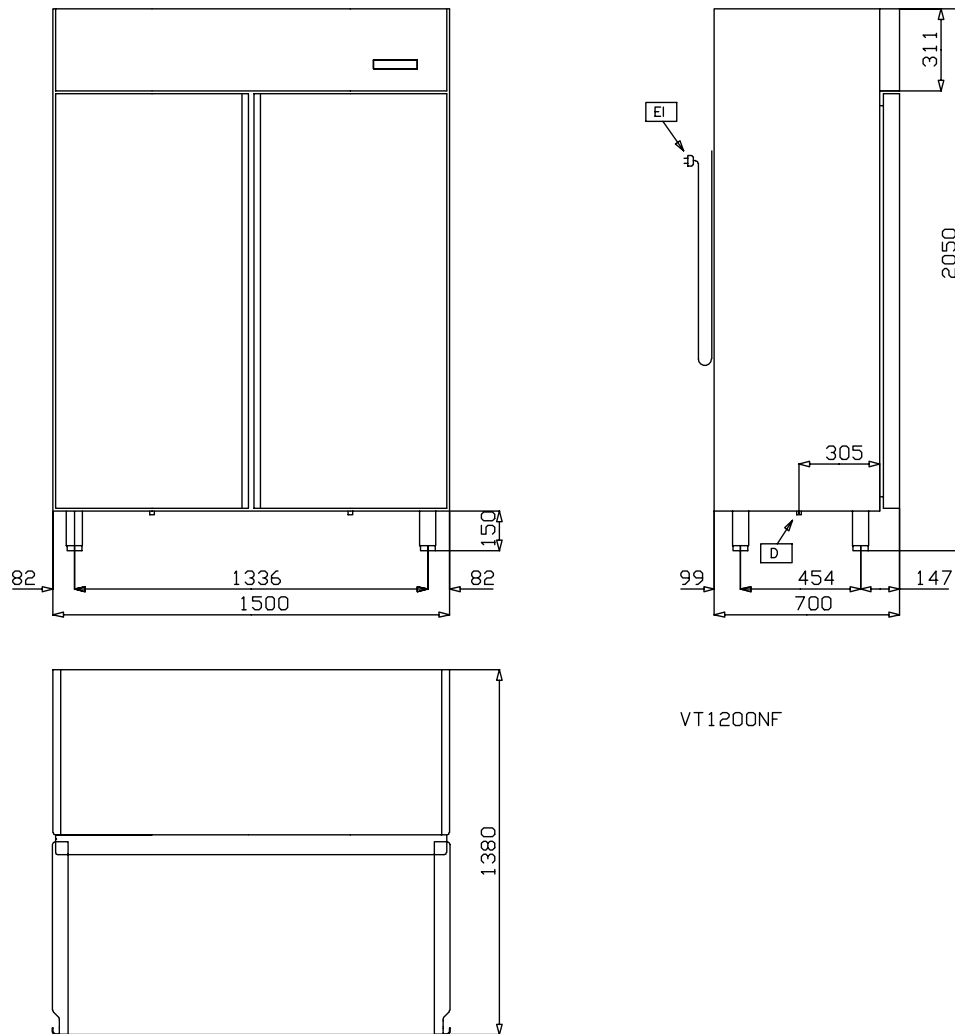


VT1200NF

	ASN220 110753
D - Water drain	16mm
EI - Electrical connection	230 V, 1N, 50



www.zanussiprofessional.com

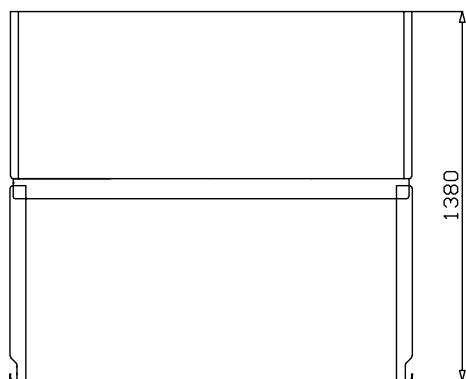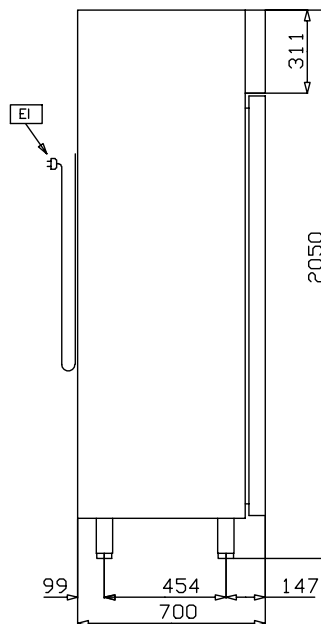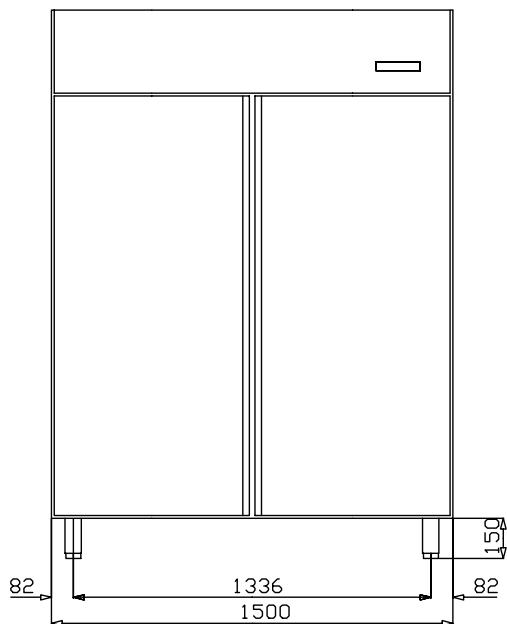

VT1200FF

	ASF220 110754
EI - Electrical connection	230 V, 1N, 50



www.zanussiprofessional.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>