

RANGE COMPOSITION

Zanussi Professional have designed and produced a complete range of refrigerated tables, that combines the dual function of worktop and refrigerated table. This versatility allows notable savings in space whilst offering functional and modular solutions to kitchen requirements.

The main benefit of this innovative new range is total flexibility: you have the possibility to compose your table to your exact personal requirements. You can order each individual unit and combine them together: structure, top, door, drawer and refrigeration unit.

We offer a basic range of 38 models but the choice is infinite.

The range presented here consists of 5 models with a temperature from -2° to +10°C. Models are available with 4 doors; 3 doors and 2x½ drawers.



113171

PT 3 SERIES

REFRIGERATED TABLES 2200 ZANUSSI PROFESSIONAL

TECHNICAL CHARACTERISTICS

- ◆ Constructed entirely in AISI 304 stainless steel with satin finish and polished interior guaranteeing maximum reliability. 2" height-adjustable AISI 304 stainless steel feet (-15 to +80 mm). Completely removable grid support structure in AISI 304 stainless steel

- ◆ The worktop has a height of 50 mm and is slotted into place for easy removal.

- ◆ High-density expanded polyurethane foam, 60 mm in thickness, with cyclopentane injection, guarantees exceptional, long-term insulation and notable energy savings.

- ◆ The design of the refrigeration unit allows maximum usage of the available space in the compartment. It is also mounted on a pull-out system to facilitate maintenance and cleaning.

- ◆ The new central position of the refrigeration unit allows perfect air circulation in the different compartments and temperature uniformity.

- ◆ These appliances are suitable for use in tropical climates (+43°C) ensuring high performance even in extreme ambient conditions.

- ◆ The base, with water drain, is pressed and features rounded internal corners to guarantee perfect cleaning.


CHARACTERISTICS	MODELS				
	TRN224A 113171	TRN224B 113172	TRN224C 113102	TRN224D 113103	TRN224E 113104
Operating temperature - min/max °C	-2/10	-2/10	-2/10	-2/10	-2/10
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - l.	590	590	570	590	590
External dimensions - mm					
width	2244	2244	2244	2244	2244
depth/with open doors	700, 1110	700, 1110	700, 1110	700, 1110	700, 1110
height	850	850	850	850	850
Internal dimensions - mm					
depth	580	580	580	580	580
height	530	530	530	530	530
Min/Max internal humidity - %	80/95	80/95	80/95	80/95	80/95
N° of drawers		2	4	6	8
N° and type of door	4	3	2	1	none
Door hinges	2 Left+2 Right	2 Left+1 Right	1 Left+1 Right	1 Left+1 Right	
N° and type of grids (included)	4, GN 1/1	3, GN 1/1	2, GN 1/1	1, GN 1/1	GN 1/1
Compressor power - HP	1/4	1/4	1/4	1/4	1/4
N° defrost in 24 hrs.	3/15'	3/15'	3/15'	3/15'	3/15'
Refrigerant type	R134a	R134a	R134a	R134a	R134a
Refrigerant quantity - g.	290	290	290	290	290
Refrigeration power - W	378	378	378	378	378
Power - kW					
installed-electric	0.38	0.38	0.38	0.38	0.38
Noise level - dBA	56	56	56	56	56
Net weight - kg.	186	194	198	202	206
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50
INCLUDED ACCESSORIES					
1/1 GN GREY "RILSAN" GRID	4	3	2	1	

- ◆ Completely automatic defrosting and automatic evaporation of defrost water obtained by hot gas.
- ◆ The refrigerated tables feature: reversible, self-closing doors; recessed ergonomical handles.
- ◆ The drawers feature: fully removable, telescopic runners in AISI 304 stainless steel; perforations for improved ventilation.
- ◆ Doors and drawers are interchangeable on site.
- ◆ CFC and HCFC free.
- ◆ All models comply with the standards required by the main international approval bodies and are H marked.

ACCESSORIES	MODELS				
	TRN224A 113171	TRN224B 113172	TRN224C 113102	TRN224D 113103	TRN224E 113104
1/1 GN GREY "RILSAN" GRID	881435	881435	881435	881435	881435
2 WHEELS FOR REFRIGERATORS/REFRIG.TABLES	880539	880539	880539	880539	880539
CHEST OF 2 DRAWERS FOR REFRIGER.COUNTER	881505	881505			
CHEST OF 3 DRAWERS FOR REFRIGER.COUNTER	881506	881506			
HACCP ADV.CONN.10 UNITS-DIG.REF.(ID9XX)	880119	880119	880119	880119	880119
HACCP ADV.CONN.80 UNITS-DIG.REF.(ID9XX)	880132	880132	880132	880132	880132
HACCP ADV.CONN.PER UNIT-DIG.REF.(ID9XX)	880133	880133	880133	880133	880133
KIT HACCP EKIS	922166	922166	922166	922166	922166
LOCK FOR REFRIGERATED COUNTERS	881499	881499	881499	881499	881499
PLASTIC CONTAINER GN 1/1 H=100 MM	811451	811451	811451	811451	811451
PLASTIC CONTAINER GN 1/1 H=150 MM	881040	881040	881040	881040	881040
PLASTIC CONTAINER GN 1/1 H=65 MM	881038	881038	881038	881038	881038
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457	881457	881457	881457



www.zanussiprofessional.com

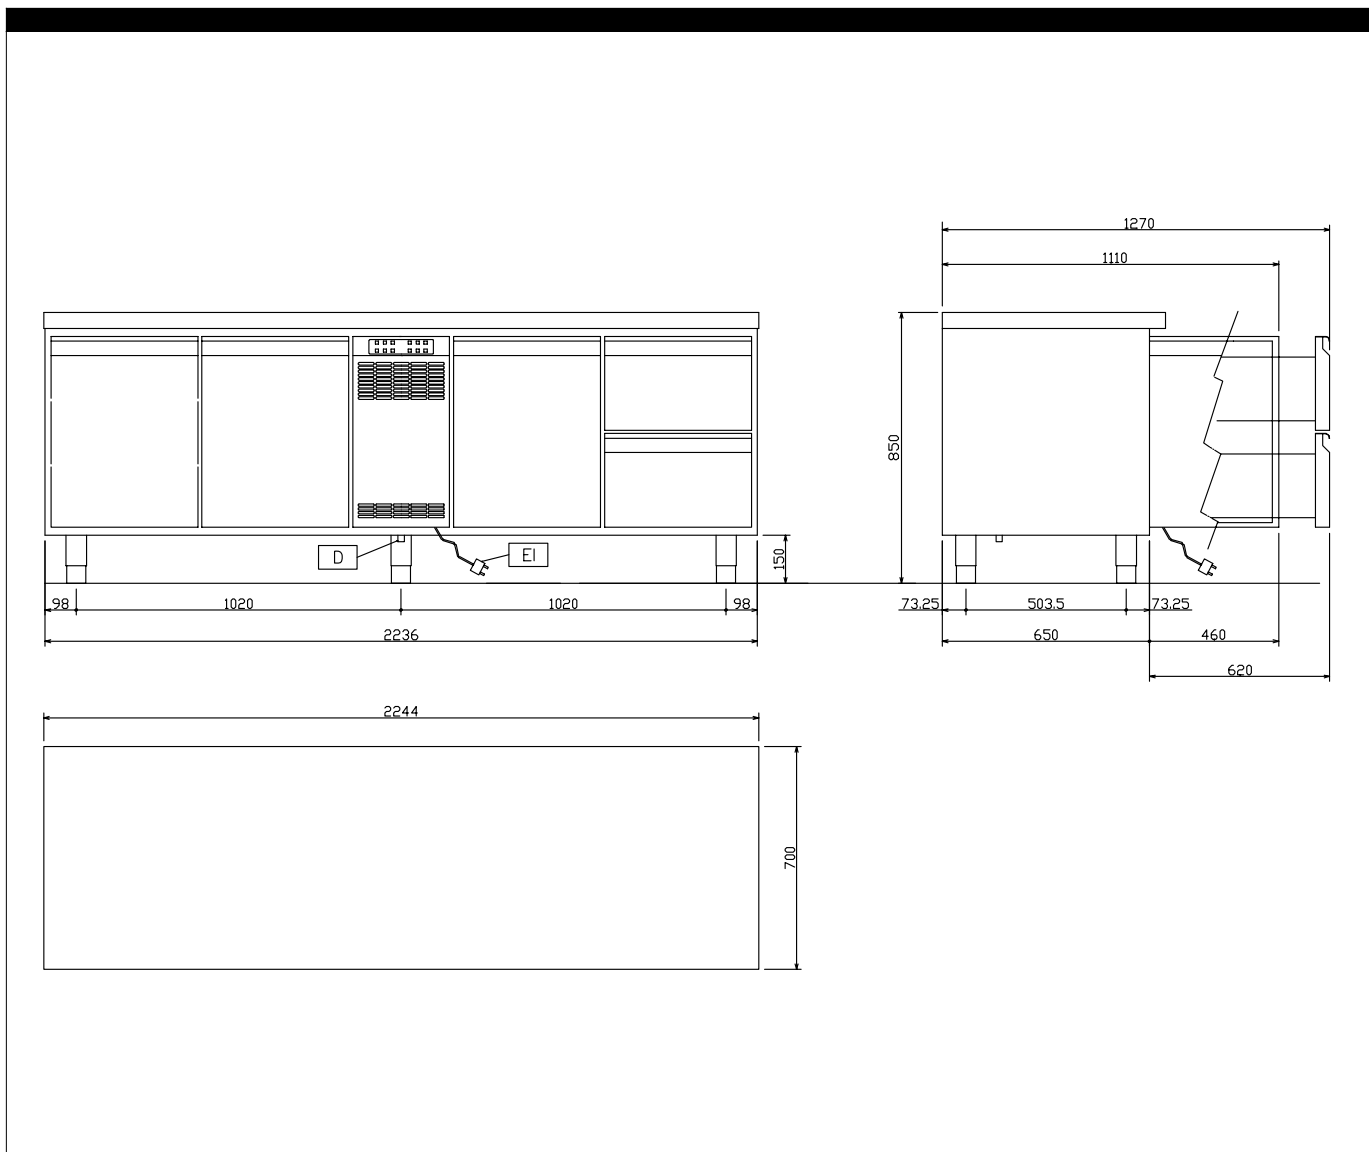

	TRN224A 113171	TRN224B 113172
D - Water drain	16mm	16mm
EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50



www.zanussiprofessional.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>