

RANGE COMPOSITION

Zanussi Professional have designed and produced a complete range of refrigerated tables, that combines the dual function of worktop and refrigerated table. This versatility allows notable savings in space whilst offering functional and modular solutions to kitchen requirements.

The main benefit of this innovative new range is total flexibility: you have the possibility to compose your table to your exact personal requirements. You can order each individual unit and combine them together: structure, top, door, drawer and refrigeration unit.

We offer a basic range of 38 models but the choice is infinite.

The range presented here consists of 3 models with a remote refrigeration unit with a temperature from -2° to +10°C. Models are available with 3 doors; 2 doors and 2x½ drawers; 1 door and 4x½ drawers; and 6x½ drawers.



113168

PT 3 SERIES

REMOTE REFRIGERATED TABLES 1800 ZANUSSI PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Constructed entirely in AISI 304 stainless steel with satin finish and polished interior guaranteeing maximum reliability. 2" height-adjustable AISI 304 stainless steel feet (-15 to +80 mm). Completely removable grid support structure in AISI 304 stainless steel.

- ◆ The worktop has a height of 50 mm and is slotted into place for easy removal.

- ◆ High-density expanded polyurethane foam, 60 mm in thickness, with cyclopentane injection, guarantees exceptional, long-term insulation and notable energy savings.

- ◆ These appliances are suitable for use in tropical climates (+43°C) ensuring high performance even in extreme ambient conditions.

- ◆ The base, with water drain, is pressed and features rounded internal corners to guarantee perfect cleaning.

- ◆ Completely automatic defrosting and automatic evaporation of defrost water obtained by hot gas.

- ◆ These models are designed for use with remote refrigeration units which means that the removal of a source of heat from the working environment solves problems of high temperatures or inadequately ventilated

CHARACTERISTICS	MODELS			
	TRRN183A 113167	TRRN183B 113168	TRRN183C 113169	TRRN183D 113170
Operating temperature - min/max °C	-2/10	-2/10	-2/10	-2/10
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - l.	440	440	440	440
External dimensions - mm				
width	1759	1759	1759	1759
depth/with open doors	700, 1110	700, 1110	700, 1110	700, 1110
height	850	850	850	850
Internal dimensions - mm				
depth	580	580	580	580
height	530	530	530	530
Min/Max internal humidity - %	80/95	80/95	80/95	80/95
N° of drawers		2	4	6
N° and type of door	3	2	1	
Door hinges	1 Left+2 Right	1 Left+1 Right	Left	
N° and type of grids (included)	3, GN 1/1	2, GN 1/1	1, GN 1/1	GN 1/1
N° defrost in 24 hrs.	3/15'	3/15'	3/15'	3/15'
Refrigerant type	R134a	R134a	R134a	R134a
Net weight - kg.	130	138	146	154
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50
INCLUDED ACCESSORIES				
1/1 GN GREY "RILSAN" GRID	3	2	1	

rooms. The remote refrigeration units are supplied with a control box that includes: a thermostatic valve, evaporator and a control panel. It is possible to have each refrigerated table connected to a specific remote refrigeration unit or to connect several appliances to a central refrigeration plant.


- ◆ The refrigerated tables feature: reversible, self-closing doors; recessed ergonomical handles.
- ◆ The drawers feature: fully removable, telescopic runners in AISI 304 stainless steel; perforations for improved ventilation.
- ◆ Doors and drawers are interchangeable on site.

- ◆ All the models are supplied as standard with an ambient drawer, 100 mm in height, above the refrigeration unit.
- ◆ CFC and HCFC free.
- ◆ All models comply with the standards required by the main international approval bodies and are H marked.

ACCESSORIES	MODELS			
	TRRN183A 113167	TRRN183B 113168	TRRN183C 113169	TRRN183D 113170
1/1 GN GREY "RILSAN" GRID	881435	881435	881435	881435
2 WHEELS FOR REFRIGERATORS/REFRIG.TABLES	880539	880539	880539	880539
CHEST OF 2 DRAWERS FOR REFRIGER.COUNTER	881505	881505	881505	881505
CHEST OF 3 DRAWERS FOR REFRIGER.COUNTER	881506	881506	881506	881506
HACCP ADV.CONN.10 UNITS-DIG.REF.(ID9XX)	880119	880119	880119	880119
HACCP ADV.CONN.80 UNITS-DIG.REF.(ID9XX)	880132	880132	880132	880132
HACCP ADV.CONN.PER UNIT-DIG.REF.(ID9XX)	880133	880133	880133	880133
KIT HACCP EKIS	922166	922166	922166	922166
LOCK FOR REFRIGERATED COUNTERS	881499	881499	881499	881499
PLASTIC CONTAINER GN 1/1 H=100 MM	811451	811451	811451	811451
PLASTIC CONTAINER GN 1/1 H=150 MM	881040	881040	881040	881040
PLASTIC CONTAINER GN 1/1 H=65 MM	881038	881038	881038	881038
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457	881457	881457
REMOTE UNIT -2+10°C FOR 550/650 L	881463	881463	881463	881463



www.zanussiprofessional.com

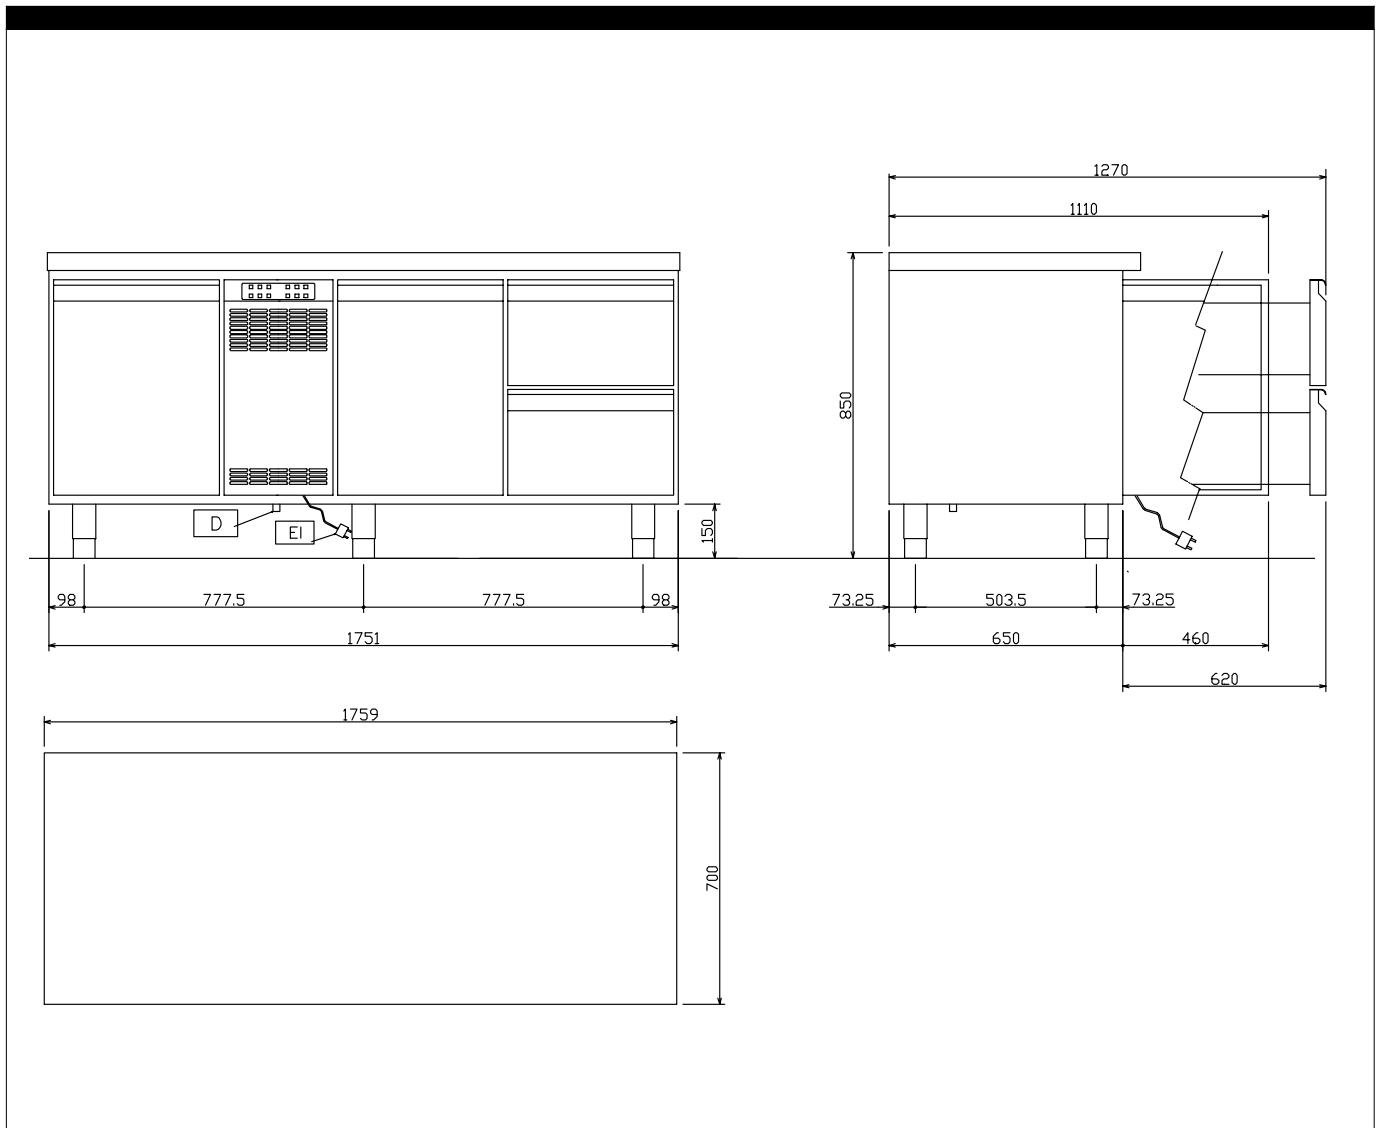

	TRRN183A 113167	TRRN183B 113168	TRRN183C 113169	TRRN183D 113170
D - Water drain	16mm	16mm	16mm	16mm
EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50
RI - Remote refrigeration connection	●	●	●	●



www.zanussiprofessional.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>