

## RANGE COMPOSITION

Zanussi Professional have designed and produced a complete range of refrigerated tables, that combines the dual function of worktop and refrigerated table. This versatility allows notable savings in space whilst offering functional and modular solutions to kitchen requirements.



# 250 LT

**SALADETTE** **ZANUSSI**  
PROFESSIONAL


## FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Built-in refrigeration unit.
- ◆ Height-adjustable feet.
- ◆ Constructed from AISI 304 stainless steel throughout to meet the highest hygiene standards.
- ◆ Rounded internal corners for ease of cleaning.
- ◆ Lower refrigerated compartment designed to accommodate GN 1/1 containers.
- ◆ Digital control panel.
- ◆ Suitable to operate in ambient temperatures up to +32°C. Temperature range: +2+10 °C.
- ◆ Forced air circulation for rapid cooling and an even temperature distribution.
- ◆ Automatic evaporation of defrost water. Drain outlet.
- ◆ Access to all components from the front.
- ◆ In compliance with H requirements.
- ◆ C.F.C. and H.C.F.C. free.


- ◆ Environmentally friendly: R134a.
- ◆ High-density expanded polyurethane foam, 50 mm in thickness, with cyclopentane

- injection.
- ◆ Developed and produced in ISO 9001 and ISO 14001 certified factory.

CHARACTERISTICS	MODELS	
	SAL25L2C9 728627	PTR259 728628
Operating temperature - min/max °C	2/10	2/10
Operating mode	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - l.	250	250
Cooling unit	Built-In	Built-In
External dimensions - mm		
width	955	950
depth/with open doors	700, 1120	700, 1120
height	845	1126
Internal dimensions - mm		
width	870	870
depth	550	550
height	520	520
Worktop type	Plastic	Marble
Min/Max internal humidity - %	50/70	50/70
N° of drawers	None	None
N° and type of door	2	2
Door hinges	1 Left+1 Right	1 Left+1 Right
Compressor power - HP	1/4;	1/4;
N° defrost in 24 hrs.	4/25'	4/25'
Refrigerant type	R134a	R134a
Refrigerant quantity - g.	120	120
Refrigeration power - W	224	224
Power - kW		
installed-electric	0.288	0.288
Net weight - kg.	82	162
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50

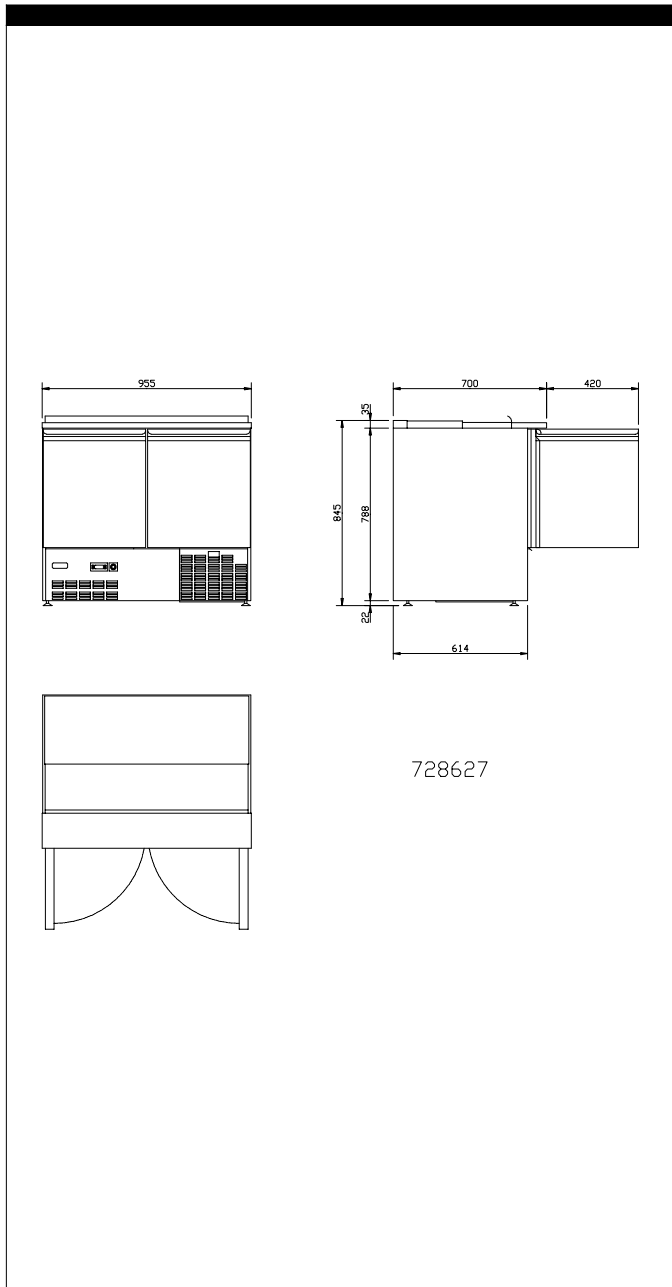

728627

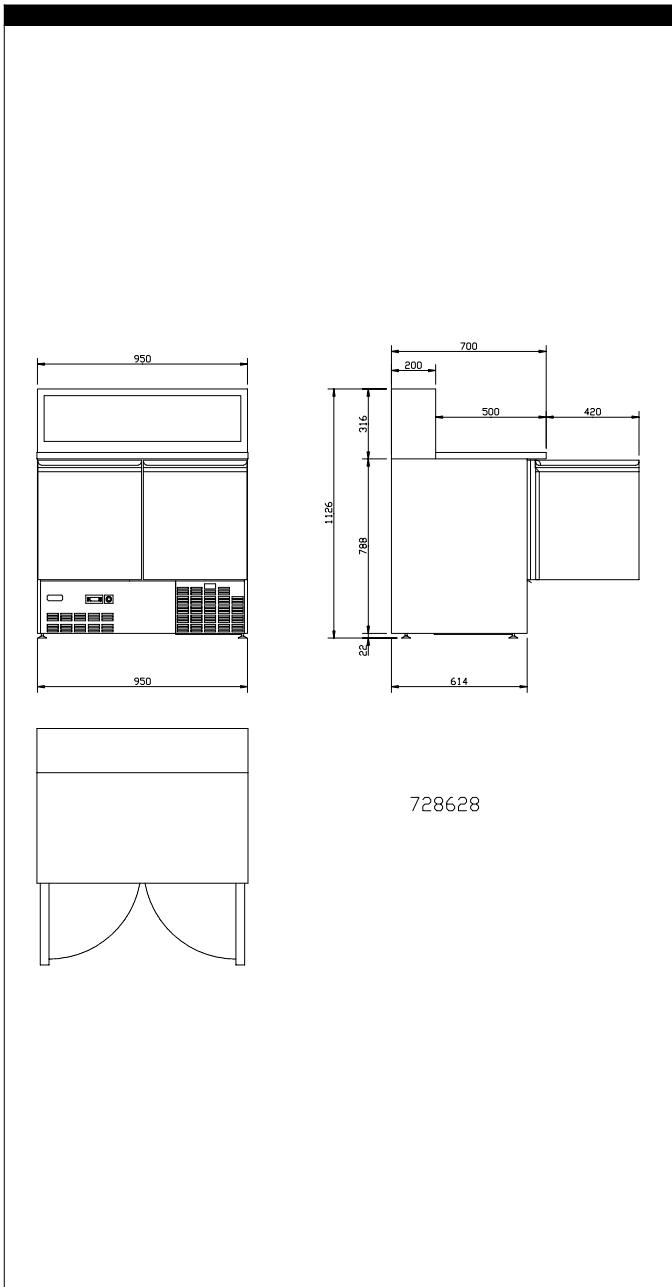

728628

	<b>SAL25L2C9</b> <b>728627</b>	<b>PTR259</b> <b>728628</b>
EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50



ACCESSORIES	MODELS	
	SAL25L2C9 728627	PTR259 728628
1/1 GN GREY "RILSAN" GRID	881435	881435
HACCP ADV.CONN.10 UNITS-DIG.REF.(ID9XX)	880119	880119
HACCP ADV.CONN.80 UNITS-DIG.REF.(ID9XX)	880132	880132
HACCP ADV.CONN.PER UNIT-DIG.REF.(ID9XX)	880133	880133
KIT 4 WHEELS FOR 250L COUNTER/SALADETTE	880267	
KIT HACCP EKIS	922166	922166
PLASTIC CONTAINER GN 1/1 H=100 MM	811451	811451
PLASTIC CONTAINER GN 1/1 H=150 MM	881040	881040
PLASTIC CONTAINER GN 1/1 H=65 MM	881038	881038



www.zanussiprofessional.com

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>