Uniden VOYAGER




owner's manual

www.uniden.com


Contents

| Controls and Indicators | 2 |
|--|------|
| Warning! | |
| Introduction | 5 |
| Features | 5 |
| Technical Support and Service | 6 |
| Maritime Radio Services Operation | 6 |
| Included in your Package | |
| Getting Started | |
| Mounting the Drop-in Charger | 8 |
| Attaching the Antenna | |
| Attaching the Battery Pack | |
| Attaching the Beltclip | |
| Charging the Battery Pack | |
| Operation | . 11 |
| Turning On the Unit and Setting Squelch | . 11 |
| Selecting a Channel | . 12 |
| One-touch Channel 16/9/TRI | . 12 |
| Triple Watch | |
| Monitoring Weather Channels | . 14 |
| Weather Alert | |
| NWR-SAME Alert | . 16 |
| Registering FIPS Code | . 17 |
| USA, International and Canadian Channels | . 18 |
| Programming a Channel into Memory | . 18 |
| Deleting a Channel from Memory | |
| Scanning | |
| Transmitting | . 20 |
| Lighted Keys and Display | |
| Battery Indicator | . 21 |
| Key Lock | |
| Marine Channels - USA | . 22 |
| Marine Channels - International | . 24 |
| Marine Channels - Canada | . 26 |
| NWR-SAME Alert Level | . 28 |
| Optional Parts and Replacement Accessories | . 30 |
| Specifications | |
| Troubleshooting | |
| FCC RF EXPOSURE INFORMATION | |
| Warranty | |

Controls and Indicators

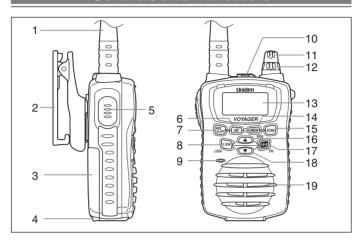

- 1 Antenna
- 2 Belt Clip
- 3 Battery
- 4 Battery Release Clip
- 5 PTT (Push to Talk) Key
- 6 USA/International/Canadian Button (UIC)
- 7 WX Mode/Weather Alert Button (WX/ALERT)
- 8 TX Power/Lock Button (1/5W/LOCK)
- 9 Microphone
- 10 Speaker MIC (Optional) Jack
- 11 Volume/Power Knob
- 12 Squelch Knob
- 13 LCD Display
- 14 Memory/FIPS Button (MEM/FIPS)
- 15 Scan Button (SCAM)
- 16 Channel Up Button (▲)
- 17 16/9 Triple Watch Button (16/9/TRI)
- 18 Channel Down Button (▼)
- 19 Speaker

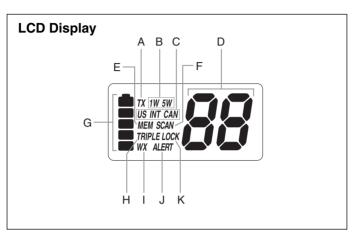

- A Transmit Indicator
- B TX Power Indicator
- C USA/International/Canadian (US/INT/CAN) Indicator
- D Channel Number Display
- E Memory Indicator
- F Scan Indicator
- G Battery Indicator
- H Triple Watch Indicator
- I Weather Mode Indicator
- J Weather Alert Indicator
- K Key Lock Indicator

Warning!

- The VOYAGER is waterproof only when both the antenna and the battery are properly attached.
- Do not operate the transmitter of any radio equipment unless all the Radio Frequency (RF) connectors are secure and any open connectors are properly terminated.
- Do not operate the transmitter of any radio equipment near electrical blasting caps or in an explosive atmosphere.
- Do not let children operate any transmitter-equipped radio equipment without proper supervision.
- Have your radio equipment serviced by a qualified technician.
- Do not operate the transmitter of any radio equipment with the antenna touching or close to the eyes, face, or exposed body parts.

Lithium Ion Battery Pack Warning

- This equipment contains a Lithium Ion Battery Pack.
- Lithium is a chemical known to the State of California to cause cancer.
- The Lithium Ion Battery Pack contained in this equipment may explode if disposed of in a fire.
- Do not short-circuit the Battery Pack.
- Do not charge the Lithium Ion Battery Pack used in this
 equipment in any charger other than the one designed to charge
 this Battery Pack. Using another charger may damage the
 Battery Pack or cause the Battery Pack to explode.
- Lithium Ion batteries must be disposed of properly.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

Introduction

The **VOYAGER** is a waterproof, portable two-way VHF transceiver. It is compact, lightweight, rugged and fits easily in your hand. This handheld VHF marine radio will give you consistent, outstanding performance in virtually all conditions and situations. To ensure that you get the most from the **VOYAGER's** features, please read this operating guide carefully before using the unit.

Features

- Waterproof (meets JIS7 waterproof specifications)
- Triple Watch Mode
- Priority Channel Startup (Channel 16)
- Programmable Memory
- One-Touch Channel 16/9
- 10 Weather Channels
- Weather Alert
- NWR-SAME Alert
- Programmable FIPS Code
- Memory Scan
- · USA, International and Canadian Channels
- Table-Top Drop-In Charger (can also be wall-mounted)
- Rechargeable Lithium Ion Battery Pack
- Battery Save Operation
- Key Lock
- Back-Lit Keys and Display
- Belt Clip
- Wrist Strap
- TX Power 1W/5W

Technical Support and Service

Your Uniden dealer can provide you with sales assistance and information. If your marine radio does not perform properly, follow the troubleshooting tips in the back of this operating guide.

For technical support contact Uniden at 1-800-586-0409. The radio contains no user-serviceable parts.

Unauthorized adjustment will void the warranty and may cause illegal radio operation.

Be sure that a qualified technician services your radio equipment.

Caution: Changes or modifications to this product not expressly approved by Uniden, or operation of this product in any way other than as detailed by this Operating Guide, can void your authority to operate this product.

Maritime Radio Services Operation

This transmitter will operate on channels/frequencies that have restricted use in the United States. The channel assignments include frequencies assigned for exclusive use of the U.S. Coast Guard, use in Canada, and use in international waters. Operation in these frequencies without proper authorization is strictly forbidden. For frequencies/channels that are currently for use in the world see page 22~29. Please contact the FCC Call Center at 1-888-CALL-FCC for any additional channel information.

Included in your Package



Reference Guide/ Printed Material

If any of these items are missing from the box, contact your Uniden Dealer or the Uniden Parts Department at (800)-554-3988.

Getting Started

Mounting the Drop-in Charger

1 Mount the drop-in charger to either a counter or wall.

To counter:

Attach the drop-in charger using the mounting screws and washers as follows.



To wall:

Insert the two mounting screws into the wall keeping the same space as the holes on the charger.



Place the charger with the screws through the larger holes then turn the charger.





Plug one end of the AC adapter into the wall outlet and the other end into the drop-in charger.



When you mount the drop-in charger on your boat, use the DC adapter instead.


Attaching the Antenna

Attach the antenna to the **VOYAGER**. Be sure the antenna is firmly seated.



Attaching the Battery Pack

- 1 Place the battery pack onto the back of the radio. It will only fit in one way.
- 2 Snap the battery release clip until it clicks. Be sure the battery pack fits tightly against the VOYAGER's body.



Attaching the Beltclip

- 1 Hold the beltclip in the direction as follows.
- 2 Apply it to the hanger piece on the back of the radio. Then slid it up.
- 3 You will hear a click. The beltclip is firmly attached.
- 4 To take the beltclip off the radio, turn it and slid it up.











Charging the Battery Pack

Your marine radio is powered by a specially designed Lithium Ion battery pack.

- Before operating the VOYAGER, charge the Lithium Ion battery pack for 4 hours without interruption in the drop-in charger.
- 1 Place the **VOYAGER** in the drop-in charger.



2 The red LED illuminates and stays On.



- The charger won't overcharge the battery pack. When charging is completed, the charge LED is no longer illuminated.
- Do not transmit when the VOYAGER is in the drop-in charger!
- You can monitor incoming calls while the VOYAGER is in the drop-in charger.

Operation

- See "Controls and Indicators" (page. 2) for button, knob, and key positions.
- When you turn On your VOYAGER, it is automatically tuned to channel 16, the United States Coast Guard frequency for distress, safety, and calling.
- When you press any key (except PTT), a short tone sounds.


Turning On the Unit and Setting Squelch

- 1 Before you turn On the unit, turn the **Squelch** knob fully counterclockwise.
- 2 Then, turn On the unit by turning the *Volume/Power* knob clockwise until you hear a hissing sound.






3 Turn the Squelch knob clockwise, just until the hissing sound stops. Use the knob to adjust to the desired squelch level. Think of the squelch control as a frequency gate which controls access to weak or strong signals depending on its setting.




- To listen to a weak or distant station, turn the knob counterclockwise. If reception is poor, turn it clockwise to cut out weak transmissions.
- If the squelch control is adjusted so you continually hear a hissing sound, the unit will not scan properly.
- 4 To turn Off the unit, turn the *Volume/Power* knob counterclockwise until it clicks

Selecting a Channel

1 Turn On your VOYAGER.




- 3 To select a lower channel, press the ▼ button.
 - To change the channel continuously, press and hold the ▲ or ▼ button for more than 1 second.



One-touch Channel 16/9/TRI

Example: While you are monitoring channel 20, you want to check channel 16 or channel 9.


- 1 You are now on channel 20.
- 2 To monitor channel 16, press the **16/9/TRI** button.
- To monitor channel 9, press the **16/9/TRI** button again.
- To return to channel 20, press the **16/9/TRI** button again.



Triple Watch

Triple Watch mode monitors channels 16 and 9 for a signal while you listen to the currently selected channel. The marine radio checks channel 16 and 9 for activity every 2 seconds.


- 1 To select Triple Watch mode, press and hold the *16/9/TRI* button for 1.5 seconds. A double confirmation tone sounds.
- 2 To exit from Triple Watch, press and hold *16/9/TRI* for 1.5 seconds. A double confirmation tone sounds.
 - While in Triple Watch mode, you can change the currently selected channel using the ▲ or ▼ button.
 - A momentary press of the 16/9/TRI button interrupts Triple Watch mode and remains on 16, or on channel 9 if you press once more. To return to the previous mode, simply press the button again.



Monitoring Weather Channels

The **VOYAGER** has 10 preprogrammed weather channel frequencies, represented by 0 through 9.

- 2 To move up, press the ▲ button.



- 3 To move down, press the ▼ button.
- To exit, press *WX/ALERT*.

 Wild disappears from the display.
 - To change the channel continuously, press and hold the ▲ or ▼ button for more than 1 second.

Weather Alert

Weather Alert allows your **VOYAGER** to function as a severe weather warning radio. If the NOAA issues a severe weather warning while the Weather Alert is turned On, the **VOYAGER** sounds an alert tone. You will then hear the emergency weather broadcast

- 1 To use Weather Alert, select the weather channel in your area.
- Press and hold WX/ALERT for 1.5 seconds. A double confirmation tone sounds.



3 When the unit receives a warning signal, it beeps for 5 seconds. ₩X, ALERT, and the channel number blink.



- 4 To turn Off Weather Alert, press and hold WX/ALERT for 1.5 seconds. A double confirmation tone sounds.
- When Weather Alert is activated, the highest priority is given this function. If the unit is in Scan, Triple Watch, or any other marine channels, it checks the weather alert signals every 7 seconds and switches to the warning receive mode automatically.

NWR-SAME Alert

In addition to the conventional Weather Alert, your **VOYAGER** is compatible with NWR-SAME Weather Alert.

Specific Area Message Encoding (S.A.M.E.) are NOAA's coded emergency weather signals that identify a specific geographic area affected by an emergency. The **VOYAGER** receives the emergency weather alert.

The unit changes its alert beep tone according to the level of severity.

- 1 To use NWR-SAME Alert, select the weather channel in your area.
- 2 Press and hold the *WX/ALERT* button for 1.5 seconds to activate this feature.
- 3 When the unit receives a warning signal, it sounds a tone defined by severity. ₩X and ALERT start blinking.

 The channel indicator displays the weather channel number and the severity.

The channel indicator displays the weather channel number and the severity level alternately.

NWR-SAME Alert Level

A1: Warning A3: Statement A2: Watch A4: Test

- 4 To turn Off NWR-SAME Alert, press and hold the WX/ALERT button for 1.5 seconds.
- This feature is effective in the weather channel mode only.

Registering FIPS Code

Six digit FIPS Codes are programmable in 15 channels, number 1~15 for NWR-SAME Weather Alert. If there is no data registered in location number 1, all of the signals are decoded. Contact the National Weather Service at 1-888-NWR-SAME for the FIPS Codes in the area of interest, or visit http://www.nws.noaa.gov/nwr/indexnw.htm

- 1 Press and hold the *MEM/FIPS* key for 1.5 seconds.
- 2 Select the channel, numbers 1~15, you want to program using the ▲ or ▼ key.
- 3 Press the *MEM/FIPS* key to enter the FIPS Code edit mode.



- 4 To enter the first digit of the code, change the left blinking digit on the display using the ▲ or ▼ key and press the MEM/FIPS key. The right digit starts to blink.
- To enter the second digit of the code, change the right blinking digit on the display using the ▲ or ▼ key and press the MEM/FIPS key.

The entered digit moves to the left and the right digit starts to blink.

- 6 Repeat step 5 for the remaining digits of the code.
- 7 After the last digit registers, the entered code appears on the display automatically for confirmation.
- To exit from this mode, press and hold the *MEM/FIPS* key for 1.5 seconds.
- 9 Press *UIC* to clear the stored FIPS Code in the displayed location.
 - Pressing the *MEM/FIPS* key for more than 1.5 seconds in the middle of the above steps prevents registration.

USA, International and Canadian Channels

1 The VOYAGER is initially set for USA marine channels when you turn On your radio.



2 To listen to international marine channels, press *UIC* once.



3 To listen to Canadian marine channels, press *UIC* again.



- 4 The radio will keep the last mode setting that was selected when turned back On.
 - For USA, international and Canadian marine channels and functions, refer to the tables starting on page 22.

Programming a Channel into Memory

Before using the scanning feature, you have to program channels into memory.

- 1 Select the channel to enter into memory by pressing the ▲ or ▼ button.
- Press the *MEM/FIPS* button to store the channel.

MEM appears on the display.



Deleting a Channel from Memory

- Select the channel to delete from memory by pressing the ▲ or ▼ button.
- 2 Press the *MEM/FIPS* button. MEM disappears from the display.



Scanning

1 To begin scanning the programmed channels, press the *SCAN* button. SCAN and TRIPLE appear on the display.



- 2 To stop scanning, press the *SCAN* button once more. SCAN and TRIPLE disappear from the display.
 - Scanning starts from the lowest to highest channel and stops when it finds an active channel. It remains on that channel until the transmission ends, then resumes scanning after a 3 second delay period.
 - When in the scan mode, the unit automatically activates the Triple Watch feature. To deactivate Triple Watch from the scanning mode, press and hold the 16/9/TRI button for 2 seconds.

TRIPLE disappears from the display.

Transmitting

1 Transmission power can be set to either 5W or 1W.

Press the *1/5W/LOCK* button to make the change, then the 5 ld or the 1 ld indicator on the display changes accordingly.



- **2** To transmit, press and hold the *PTT* key. TX appears on the display.
- To return to receive, release the *PTT* key.

 TX disappears from the display.
 - If the *PTT* key is pressed for more than 5 minutes, TX starts blinking and the transmission ends. The TX time out tone will sound until the *PTT* key is released.
 - If the battery indicator drops to the 1-mark level on the display, when the *PTT* key is pressed, the radio will not transmit and the TX icon starts blinking.
 (Refer to the description of the Battery Indicator on the next page.)

Lighted Keys and Display

To light the display, press any key excluding the *PTT* key.

 If you press any button other than the PTT key while the display and keypad are illuminated, it remains illuminated for another 5 seconds.


Battery Indicator

When the unit is On, battery power is always indicated on the display.

When the battery is fully charged, the battery indicator appears as follows:

5W 55W

When the battery is nearly discharged, the battery indicator appears as follows:





Key Lock

To prevent accidental entries, you can lock the keypad.

- 1 Press and hold the 1/5W/LOCK key for 1.5 seconds. The unit will beep two times to confirm that the keypad is locked with L□□K indication on the display.
- 2 To unlock the keypad, press and hold the 1/5W/LOCK key again for 1.5 seconds. The unit will beep twice to confirm that the keypad is unlocked, and LOCK will disappear.
 - You can also unlock the keypad by turning the radio Off and then On again.

Marine Channels - USA

| | | | | | | 1 |
|-----|-------------------------------------|---------|---------------------------|------|-----------------|------------------|
| | Frequency (MHz) Transmit Receive | | Traffic Type | Note | Ship to Ship | Ship to Shore |
| WX0 | _ | 163.275 | NOAA Weather | | RX Only | RX Only |
| WX1 | _ | 162.550 | NOAA Weather | | RX Only | RX Only |
| WX2 | _ | 162.400 | NOAA Weather | | RX Only | RX Only |
| WX3 | _ | 162.475 | NOAA Weather | | RX Only | RX Only |
| WX4 | _ | 162.425 | NOAA Weather | | RX Only | RX Only |
| WX5 | _ | 162.450 | NOAA Weather | | RX Only | RX Only |
| WX6 | _ | 162.500 | NOAA Weather | | RX Only | RX Only |
| WX7 | _ | 162.525 | NOAA Weather | | RX Only | RX Only |
| WX8 | _ | 161.650 | Can. Weather | | RX Only | RX Only |
| WX9 | _ | 161.775 | Can. Weathe | | RX Only | RX Only |
| 01 | 156.050 | 156.050 | Com'l, Port Ops, VTS | | Yes | Yes |
| 02 | | | | | | |
| 03 | 156.150 | 156.150 | Com'l, Port Ops, VTS | | Yes | Yes |
| 04 | | | | | | |
| 05 | 156.250 | 156.250 | Port Ops, VTS | | Yes | Yes |
| 06 | 156.300 | 156.300 | Safety | | Yes | No |
| 07 | 156.350 | 156.350 | Com'l | | Yes | Yes |
| 08 | 156.400 | 156.400 | Com'l | | Yes | No |
| 09 | 156.450 | 156.450 | Com'l & Non Com'l | | Yes | Yes |
| 10 | 156.500 | 156.500 | Com'l | | Yes | Yes |
| 11 | 156.550 | 156.550 | Com'l, VTS, SMS | | Yes | Yes |
| 12 | 156.600 | 156.600 | Port Ops, VTS, SMS | | Yes | Yes |
| 13 | 156.650 | 156.650 | Navigational | 1W | Yes | No |
| 14 | 156.700 | 156.700 | Port Ops | | Yes | Yes |
| 15 | RX Only | 156.750 | Environmental | | | RX Only |
| 16 | 156.800 | 156.800 | Distress, Safety, Calling | | Yes | Yes |
| 17 | 156.850 | 156.850 | State Control | | Yes | Yes |
| 18 | 156.900 | 156.900 | Com'l | | Yes | Yes |
| 19 | 156.950 | 156.950 | Com'l | | Yes | Yes |
| 20 | 157.000 | 157.000 | Port Ops | | Yes | Yes |
| 21 | 157.050 | 157.050 | U.S. Govt Only | | Yes | Yes |
| 22 | 157.100 | 157.100 | Coast Guard | | Yes | Yes |
| 23 | 157.150 | 157.150 | U.S. Govt Only | | Yes | Yes |

| Channel Desig | Frequent Transmit | cy (MHz) Receive | Traffic Type | Note | Ship to Ship | Ship to Shore |
|------------------|----------------------|---------------------|-----------------|------|-----------------|------------------|
| 24 | 157.200 | 161.800 | Public Corresp. | DUP | No | Yes |
| 25 | 157.250 | 161.850 | Public Corresp. | DUP | No | Yes |
| 26 | 157.300 | 161.900 | Public Corresp. | DUP | No | Yes |
| 27 | 157.350 | 161.950 | Public Corresp. | DUP | No | Yes |
| 28 | 157.400 | 162.000 | Public Corresp. | DUP | No | Yes |
| 60 | | | | INH | | |
| 61 | 156.075 | 156.075 | | | | |
| 62 | | | | INH | | |
| 63 | 156.175 | 156.175 | | | | |
| 64 | 156.225 | 156.225 | | | | |
| 65 | 156.275 | 156.275 | Port Ops | | No | Yes |
| 66 | 156.325 | 156.325 | Port Ops | | Yes | Yes |
| 67 | 156.375 | 156.375 | Com'l | 1W | Yes | No |
| 68 | 156.425 | 156.425 | Non Com'l | | Yes | Yes |
| 69 | 156.475 | 156.475 | Non Com'l | | Yes | Yes |
| 70 | RX Only | 156.525 | | | | |
| 71 | 156.575 | 156.575 | Non Com'l | | Yes | Yes |
| 72 | 156.625 | 156.625 | Non Com'l | | Yes | No |
| 73 | 156.675 | 156.675 | Port Ops | | Yes | Yes |
| 74 | 156.725 | 156.725 | Port Ops | | Yes | Yes |
| 77 | 156.875 | 156.875 | Port Ops | | Yes | No |
| 78 | 156.925 | 156.925 | Non Com'l | | Yes | Yes |
| 79 | 156.975 | 156.975 | Com'l | | Yes | Yes |
| 80 | 157.025 | 157.025 | Com'l | | Yes | Yes |
| 81 | 157.075 | 157.075 | U.S. Govt Only | | Yes | Yes |
| 82 | 157.125 | 157.125 | U.S. Govt Only | | Yes | Yes |
| 83 | 157.175 | 157.175 | U.S. Govt Only | | Yes | Yes |
| 84 | 157.225 | 161.825 | Public Corresp. | DUP | No | Yes |
| 85 | 157.275 | 161.875 | Public Corresp. | DUP | No | Yes |
| 86 | 157.325 | 161.925 | Public Corresp. | DUP | No | Yes |
| 87 | 157.375 | 161.975 | Public Corresp. | DUP | No | Yes |
| 88 | 157.425 | 157.425 | Com'l | | Yes | No |

Marine Channels - International

| Desig Transmit Receive ITamic Type Ship Shore Scan List WX0 — 163.275 NOAA Weather RX Only RX Only Weather WX1 — 162.550 NOAA Weather RX Only RX Only Weather WX2 — 162.400 NOAA Weather RX Only RX Only Weather WX3 — 162.475 NOAA Weather RX Only RX Only Weather WX4 — 162.425 NOAA Weather RX Only RX Only Weather WX5 — 162.500 NOAA Weather RX Only RX Only Weather WX6 — 162.525 NOAA Weather RX Only RX Only Weather WX7 — 166.500 Can. Weather RX Only RX Only Weather WX8 — 161.650 Can. Weather RX Only RX Only Weather WX9 — 161.775 Can. Weather RX Only RX Only | | | | | | | |
|---|-----|-------------|---------|--------------|---------|---------|------------------------|
| WX1 — 162.550 NOAA Weather RX Only RX Only Weather WX2 — 162.400 NOAA Weather RX Only RX Only Weather WX3 — 162.475 NOAA Weather RX Only RX Only Weather WX4 — 162.425 NOAA Weather RX Only RX Only Weather WX5 — 162.450 NOAA Weather RX Only RX Only Weather WX6 — 162.500 NOAA Weather RX Only RX Only Weather WX7 — 162.525 NOAA Weather RX Only RX Only Weather WX8 — 161.650 Can. Weather RX Only RX Only Weather WX9 — 161.775 Can. Weather RX Only RX Only Weather WX9 — 161.670 Duplex Yes Yes Yes 02 156.150 160.750 Duplex Yes Yes Yes </td <td></td> <td colspan="2"></td> <td>Traffic Type</td> <td></td> <td></td> <td>Permanent Scan List</td> | | | | Traffic Type | | | Permanent Scan List |
| WX1 — 162.550 NOAA Weather RX Only RX Only Weather WX2 — 162.400 NOAA Weather RX Only RX Only Weather WX3 — 162.475 NOAA Weather RX Only RX Only Weather WX4 — 162.425 NOAA Weather RX Only RX Only Weather WX5 — 162.500 NOAA Weather RX Only RX Only Weather WX6 — 162.525 NOAA Weather RX Only RX Only Weather WX7 — 161.650 Can. Weather RX Only RX Only Weather WX8 — 161.775 Can. Weather RX Only RX Only Weather WX9 — 161.775 Can. Weather RX Only RX Only Weather WX9 — 161.775 Can. Weather RX Only RX Only Weather WX9 — 161.775 Can. Weather RX Only RX Only | WX0 | — 163.275 N | | NOAA Weather | RX Only | RX Only | Weather |
| WX2 — 162.400 NOAA Weather RX Only RX Only Weather WX3 — 162.475 NOAA Weather RX Only RX Only Weather WX4 — 162.425 NOAA Weather RX Only RX Only Weather WX5 — 162.450 NOAA Weather RX Only RX Only Weather WX6 — 162.525 NOAA Weather RX Only RX Only Weather WX7 — 161.650 Can. Weather RX Only RX Only Weather WX8 — 161.675 Can. Weather RX Only RX Only Weather WX9 — 161.775 Can. Weather RX Only RX Only Weather WX9 — 161.775 Can. Weather RX Only RX Only Weather WX9 — 161.775 Can. Weather RX Only RX Only Weather WX9 — 161.670 Duplex Yes Yes Ye | WX1 | | 162.550 | NOAA Weather | RX Only | RX Only | Weather |
| WX4 — 162.425 NOAA Weather RX Only RX Only Weather WX5 — 162.450 NOAA Weather RX Only RX Only Weather WX6 — 162.500 NOAA Weather RX Only RX Only Weather WX7 — 162.525 NOAA Weather RX Only RX Only Weather WX8 — 161.650 Can. Weather RX Only RX Only Weather WX9 — 161.775 Can. Weather RX Only RX Only Weather 01 156.050 160.650 Duplex Yes Yes 02 156.100 160.750 Duplex Yes Yes 03 156.550 160.850 Duplex Yes Yes 04 156.200 160.850 Duplex Yes Yes 05 156.250 160.850 Duplex Yes Yes 06 156.300 156.400 Yes Yes Ye | WX2 | _ | 162.400 | NOAA Weather | | RX Only | Weather |
| WX5 — 162.450 NOAA Weather RX Only RX Only Weather WX6 — 162.500 NOAA Weather RX Only RX Only Weather WX7 — 162.525 NOAA Weather RX Only RX Only Weather WX8 — 161.650 Can. Weather RX Only RX Only Weather WX9 — 161.775 Can. Weather RX Only RX Only Weather 01 156.050 160.650 Duplex Yes Yes 02 156.100 160.750 Duplex Yes Yes 03 156.150 160.750 Duplex Yes Yes 04 156.250 160.800 Duplex Yes Yes 05 156.250 160.850 Duplex Yes Yes 06 156.300 156.400 Yes Yes Yes 08 156.450 156.450 Yes Yes Yes <td< td=""><td>WX3</td><td>_</td><td>162.475</td><td>NOAA Weather</td><td>RX Only</td><td>RX Only</td><td>Weather</td></td<> | WX3 | _ | 162.475 | NOAA Weather | RX Only | RX Only | Weather |
| WX6 — 162.500 NOAA Weather RX Only RX Only Weather WX7 — 162.525 NOAA Weather RX Only RX Only Weather WX8 — 161.650 Can. Weather RX Only RX Only Weather WX9 — 161.775 Can. Weather RX Only RX Only Weather 01 156.050 160.650 Duplex Yes Yes 02 156.100 160.700 Duplex Yes Yes 03 156.150 160.750 Duplex Yes Yes 04 156.200 160.800 Duplex Yes Yes 05 156.250 160.850 Duplex Yes Yes 06 156.300 156.300 Yes Yes 08 156.400 156.400 Yes Yes Fish 10 156.550 156.550 Yes Yes 11 156.650 156.650 Yes <td>WX4</td> <td>_</td> <td>162.425</td> <td>NOAA Weather</td> <td>RX Only</td> <td>RX Only</td> <td>Weather</td> | WX4 | _ | 162.425 | NOAA Weather | RX Only | RX Only | Weather |
| WX7 — 162.525 NOAA Weather RX Only RX Only Weather WX8 — 161.650 Can. Weather RX Only RX Only Weather WX9 — 161.775 Can. Weather RX Only RX Only Weather 01 156.050 160.650 Duplex Yes Yes 02 156.100 160.750 Duplex Yes Yes 03 156.150 160.750 Duplex Yes Yes 04 156.200 160.800 Duplex Yes Yes 05 156.250 160.850 Duplex Yes Yes 06 156.300 156.300 Yes Yes 07 156.350 160.950 Duplex Yes Yes 08 156.450 156.450 Yes Yes Yes 10 156.550 156.550 Yes Yes 11 156.650 156.650 Yes Yes | WX5 | _ | 162.450 | NOAA Weather | RX Only | RX Only | Weather |
| WX8 — 161.650 Can. Weather RX Only RX Only Weather WX9 — 161.775 Can. Weather RX Only RX Only Weather 01 156.050 160.650 Duplex Yes Yes 02 156.100 160.700 Duplex Yes Yes 03 156.150 160.750 Duplex Yes Yes 04 156.200 160.800 Duplex Yes Yes 05 156.250 160.850 Duplex Yes Yes 06 156.300 156.300 Yes Yes 07 156.350 160.950 Duplex Yes Yes 08 156.400 156.400 Yes Yes Fish 10 156.550 156.550 Yes Yes 11 156.550 156.650 Yes Yes 12 156.650 156.650 Yes Yes 13 156.750 | WX6 | - | 162.500 | NOAA Weather | RX Only | RX Only | Weather |
| WX9 — 161.775 Can. Weather RX Only RX Only Weather 01 156.050 160.650 Duplex Yes Yes 02 156.100 160.700 Duplex Yes Yes 03 156.150 160.750 Duplex Yes Yes 04 156.200 160.800 Duplex Yes Yes 05 156.250 160.850 Duplex Yes Yes 06 156.300 156.300 Yes Yes Yes 07 156.350 160.950 Duplex Yes Yes 08 156.400 156.400 Yes Yes Fish 10 156.550 156.500 Yes Yes 11 156.550 156.550 Yes Yes 12 156.600 156.600 Yes Yes 13 156.550 Yes Yes 14 156.750 156.750 Yes Yes | WX7 | - | 162.525 | NOAA Weather | RX Only | RX Only | Weather |
| 01 156.050 160.650 Duplex Yes Yes 02 156.100 160.700 Duplex Yes Yes 03 156.150 160.750 Duplex Yes Yes 04 156.200 160.800 Duplex Yes Yes 05 156.250 160.850 Duplex Yes Yes 06 156.300 156.300 Yes No 07 156.350 160.950 Duplex Yes Yes 08 156.400 156.400 Yes Yes Yes 09 156.450 156.500 Yes Yes Yes 10 156.500 156.500 Yes Yes Yes 11 156.550 156.650 Yes Yes Yes 12 156.600 156.600 Yes Yes Yes 13 156.750 156.750 Yes Yes Yes 14 156.750 156.75 | WX8 | - | 161.650 | Can. Weather | RX Only | RX Only | Weather |
| 02 156.100 160.700 Duplex Yes Yes 03 156.150 160.750 Duplex Yes Yes 04 156.200 160.800 Duplex Yes Yes 05 156.250 160.850 Duplex Yes Yes 06 156.300 156.300 Yes No 07 156.350 160.950 Duplex Yes Yes 08 156.400 156.400 Yes Yes Yes 09 156.450 Yes Yes Yes 10 156.500 Yes Yes Yes 11 156.550 Yes Yes Yes 12 156.650 156.600 Yes Yes 13 156.650 156.650 Yes Yes 14 156.750 156.750 Yes Yes 15 156.750 156.850 Yes Yes 16 156.850 156.850 | WX9 | - | 161.775 | Can. Weather | RX Only | RX Only | Weather |
| 03 156.150 160.750 Duplex Yes Yes 04 156.200 160.800 Duplex Yes Yes 05 156.250 160.850 Duplex Yes Yes 06 156.300 156.300 Yes No 07 156.350 160.950 Duplex Yes Yes 08 156.400 156.400 Yes No 09 156.450 156.450 Yes Yes 10 156.500 156.500 Yes Yes 11 156.550 156.550 Yes Yes 12 156.600 156.600 Yes Yes 13 156.650 156.650 Yes Yes 14 156.700 Yes Yes Yes 15 156.750 156.750 Yes Yes 16 156.850 156.850 Yes Yes 17 156.850 156.850 Yes Yes | 01 | 156.050 | 160.650 | Duplex | Yes | Yes | |
| 04 156.200 160.800 Duplex Yes Yes 05 156.250 160.850 Duplex Yes Yes 06 156.300 156.300 Yes No 07 156.350 160.950 Duplex Yes Yes 08 156.400 156.400 Yes No 09 156.450 156.450 Yes Yes 10 156.500 156.500 Yes Yes 11 156.550 156.550 Yes Yes 12 156.600 156.600 Yes Yes 13 156.650 156.650 Yes Yes 14 156.700 156.700 Yes Yes 15 156.750 156.750 Yes Yes 16 156.850 156.850 Yes Yes 17 156.850 156.850 Yes Yes 18 156.900 161.500 Duplex Yes Yes< | 02 | 156.100 | 160.700 | Duplex | Yes | Yes | |
| 05 156.250 160.850 Duplex Yes Yes 06 156.300 156.300 Yes No 07 156.350 160.950 Duplex Yes Yes 08 156.400 156.400 Yes No 09 156.450 156.450 Yes Yes 10 156.500 156.500 Yes Yes 11 156.550 156.550 Yes Yes 12 156.600 156.600 Yes Yes 13 156.650 156.650 Yes Yes 14 156.700 156.700 Yes Yes 15 156.750 156.750 Yes Yes 16 156.800 156.800 Yes Yes 17 156.850 156.850 Yes Yes 18 156.900 161.500 Duplex Yes Yes 19 156.950 161.550 Duplex Yes Yes< | 03 | 156.150 | 160.750 | Duplex | Yes | Yes | |
| 06 156.300 156.300 Yes No 07 156.350 160.950 Duplex Yes Yes 08 156.400 156.400 Yes No 09 156.450 156.450 Yes Yes 10 156.500 156.500 Yes Yes 11 156.550 156.550 Yes Yes 12 156.600 156.600 Yes Yes 13 156.650 156.650 Yes Yes 14 156.700 156.700 Yes Yes 15 156.750 156.750 Yes Yes 16 156.800 156.800 Yes Yes 17 156.850 156.850 Yes Yes 18 156.900 161.500 Duplex Yes Yes 19 156.950 161.550 Duplex Yes Yes 20 157.000 161.600 Duplex Yes Yes< | 04 | 156.200 | 160.800 | Duplex | Yes | Yes | |
| 07 156.350 160.950 Duplex Yes Yes 08 156.400 156.400 Yes No 09 156.450 Yes Yes Yes 10 156.500 156.500 Yes Yes 11 156.550 156.550 Yes Yes 12 156.600 156.600 Yes Yes 13 156.650 156.650 Yes Yes 14 156.700 156.700 Yes Yes 15 156.750 156.750 Yes Yes 16 156.800 156.800 Yes Yes 17 156.850 156.850 Yes Yes 18 156.900 161.500 Duplex Yes Yes 19 156.950 161.550 Duplex Yes Yes 20 157.000 161.600 Duplex Yes Yes 21 157.050 161.650 Duplex Yes< | 05 | 156.250 | 160.850 | Duplex | Yes | Yes | |
| 08 156.400 156.400 Yes No 09 156.450 156.450 Yes Yes Fish 10 156.500 156.500 Yes Yes 11 156.550 156.550 Yes Yes 12 156.600 156.600 Yes Yes 13 156.650 156.650 Yes Yes 14 156.700 156.700 Yes Yes Environmental 15 156.750 156.750 Yes Yes Yes Environmental 16 156.800 156.800 Yes Yes Yes Yes 17 156.850 156.850 Yes Yes Yes Yes 18 156.900 161.500 Duplex Yes Yes Yes 19 156.950 161.650 Duplex Yes Yes 20 157.000 161.650 Duplex Yes Yes 21 157.100 | 06 | 156.300 | 156.300 | | Yes | No | |
| 09 156.450 156.450 Yes Yes Fish 10 156.500 156.500 Yes Yes 11 156.550 156.550 Yes Yes 12 156.600 156.600 Yes Yes 13 156.650 156.650 Yes Yes 14 156.700 156.700 Yes Yes 15 156.750 156.750 Yes Yes 16 156.800 156.800 Yes Yes 17 156.850 156.850 Yes Yes 18 156.900 161.500 Duplex Yes Yes 19 156.950 161.550 Duplex Yes Yes 20 157.000 161.600 Duplex Yes Yes 21 157.050 161.650 Duplex Yes Yes 22 157.100 161.700 Duplex Yes Yes | 07 | 156.350 | 160.950 | Duplex | Yes | Yes | |
| 10 156.500 156.500 Yes Yes 11 156.550 156.550 Yes Yes 12 156.600 156.600 Yes Yes 13 156.650 156.650 Yes Yes 14 156.700 156.700 Yes Yes 15 156.750 156.750 Yes Yes 16 156.800 156.800 Yes Yes 17 156.850 156.850 Yes Yes 18 156.900 161.500 Duplex Yes Yes 19 156.950 161.550 Duplex Yes Yes 20 157.000 161.600 Duplex Yes Yes 21 157.050 161.650 Duplex Yes Yes 22 157.100 161.700 Duplex Yes Yes | 08 | 156.400 | 156.400 | | Yes | No | |
| 11 156.550 Yes Yes 12 156.600 156.600 Yes Yes 13 156.650 156.650 Yes Yes 14 156.700 156.700 Yes Yes 15 156.750 156.750 Yes Yes Environmental 16 156.800 156.800 Yes Yes Yes 17 156.850 156.850 Yes Yes Yes 18 156.900 161.500 Duplex Yes Yes 19 156.950 161.550 Duplex Yes Yes 20 157.000 161.600 Duplex Yes Yes 21 157.050 161.650 Duplex Yes Yes 22 157.100 161.700 Duplex Yes Yes | 09 | 156.450 | 156.450 | | Yes | Yes | Fish |
| 12 156.600 156.600 Yes Yes 13 156.650 156.650 Yes Yes 14 156.700 156.700 Yes Yes 15 156.750 156.750 Yes Yes Environmental 16 156.800 156.800 Yes Yes Yes 17 156.850 156.850 Yes Yes Yes 18 156.900 161.500 Duplex Yes Yes 19 156.950 161.550 Duplex Yes Yes 20 157.000 161.600 Duplex Yes Yes 21 157.050 161.650 Duplex Yes Yes 22 157.100 161.700 Duplex Yes Yes | 10 | 156.500 | 156.500 | | Yes | Yes | |
| 13 156.650 156.650 Yes Yes 14 156.700 156.700 Yes Yes 15 156.750 156.750 Yes Yes Environmental 16 156.800 156.800 Yes Yes 17 156.850 156.850 Yes Yes 18 156.900 161.500 Duplex Yes Yes 19 156.950 161.550 Duplex Yes Yes 20 157.000 161.600 Duplex Yes Yes 21 157.050 161.650 Duplex Yes Yes 22 157.100 161.700 Duplex Yes Yes | 11 | 156.550 | 156.550 | | Yes | Yes | |
| 14 156.700 156.700 Yes Yes 15 156.750 156.750 Yes Yes Environmental 16 156.800 156.800 Yes Yes 17 156.850 156.850 Yes Yes 18 156.900 161.500 Duplex Yes Yes 19 156.950 161.550 Duplex Yes Yes 20 157.000 161.600 Duplex Yes Yes 21 157.050 161.650 Duplex Yes Yes 22 157.100 161.700 Duplex Yes Yes | 12 | 156.600 | 156.600 | | Yes | Yes | |
| 15 156.750 Yes Yes Environmental 16 156.800 156.800 Yes Yes 17 156.850 156.850 Yes Yes 18 156.900 161.500 Duplex Yes Yes 19 156.950 161.550 Duplex Yes Yes 20 157.000 161.600 Duplex Yes Yes 21 157.050 161.650 Duplex Yes Yes 22 157.100 161.700 Duplex Yes Yes | 13 | 156.650 | 156.650 | | Yes | Yes | |
| 16 156.800 156.800 Yes Yes 17 156.850 156.850 Yes Yes 18 156.900 161.500 Duplex Yes Yes 19 156.950 161.550 Duplex Yes Yes 20 157.000 161.600 Duplex Yes Yes 21 157.050 161.650 Duplex Yes Yes 22 157.100 161.700 Duplex Yes Yes | 14 | 156.700 | 156.700 | | Yes | Yes | |
| 17 156.850 156.850 Yes Yes 18 156.900 161.500 Duplex Yes Yes 19 156.950 161.550 Duplex Yes Yes 20 157.000 161.600 Duplex Yes Yes 21 157.050 161.650 Duplex Yes Yes 22 157.100 161.700 Duplex Yes Yes | 15 | 156.750 | 156.750 | | Yes | Yes | Environmental |
| 18 156.900 161.500 Duplex Yes Yes 19 156.950 161.550 Duplex Yes Yes 20 157.000 161.600 Duplex Yes Yes 21 157.050 161.650 Duplex Yes Yes 22 157.100 161.700 Duplex Yes Yes | 16 | 156.800 | 156.800 | | Yes | Yes | |
| 19 156.950 161.550 Duplex Yes Yes 20 157.000 161.600 Duplex Yes Yes 21 157.050 161.650 Duplex Yes Yes 22 157.100 161.700 Duplex Yes Yes | 17 | 156.850 | 156.850 | | Yes | Yes | |
| 20 157.000 161.600 Duplex Yes Yes 21 157.050 161.650 Duplex Yes Yes 22 157.100 161.700 Duplex Yes Yes | 18 | 156.900 | 161.500 | Duplex | Yes | Yes | |
| 21 157.050 161.650 Duplex Yes Yes 22 157.100 161.700 Duplex Yes Yes | 19 | 156.950 | 161.550 | Duplex | Yes | Yes | |
| 22 157.100 161.700 Duplex Yes Yes | 20 | 157.000 | 161.600 | Duplex | Yes | Yes | |
| | 21 | 157.050 | 161.650 | Duplex | Yes | Yes | |
| 23 157.150 161.750 Duplex Yes Yes | 22 | 157.100 | 161.700 | Duplex | Yes | Yes | |
| | 23 | 157.150 | 161.750 | Duplex | Yes | Yes | |

| Channel | | cy (MHz) | Traffic Type | Ship to | Ship to | Permanent |
|---------|------------------|----------|--------------|---------|---------|-------------|
| Desig | Transmit Receive | | | Ship | Shore | Scan List |
| 24 | 157.200 | 161.800 | Duplex | No | Yes | Busy Tel. |
| 25 | 157.250 | 161.850 | Duplex | No | Yes | Busy Tel. |
| 26 | 157.300 | 161.900 | Duplex | No | Yes | Busy Tel. |
| 27 | 157.350 | 161.950 | Duplex | No | Yes | Busy Tel. |
| 28 | 157.400 | 162.000 | Duplex | No | Yes | Busy Tel. |
| 60 | 156.025 | 160.625 | Duplex | | | |
| 61 | 156.075 | 160.675 | Duplex | | | |
| 62 | 156.125 | 160.725 | Duplex | | | |
| 63 | 156.175 | 160.775 | Duplex | | | |
| 64 | 156.225 | 160.825 | Duplex | | | |
| 65 | 156.275 | 160.875 | Duplex | Yes | Yes | |
| 66 | 156.325 | 160.925 | Duplex | Yes | Yes | |
| 67 | 156.375 | 156.375 | | Yes | No | |
| 68 | 156.425 | 156.425 | | Yes | Yes | Fish |
| 69 | 156.475 | 156.475 | | Yes | Yes | Fish |
| 70 | RX Only | 156.525 | | | | |
| 71 | 156.575 | 156.575 | | Yes | Yes | Fish |
| 72 | 156.625 | 156.625 | | Yes | No | Fish |
| 73 | 156.675 | 156.675 | | Yes | Yes | |
| 74 | 156.725 | 156.725 | | Yes | Yes | |
| 77 | 156.875 | 156.875 | | Yes | No | |
| 78 | 156.925 | 161.525 | Duplex | Yes | Yes | |
| 79 | 156.975 | 161.575 | Duplex | Yes | Yes | |
| 80 | 157.025 | 161.625 | Duplex | Yes | Yes | |
| 81 | 157.075 | 161.675 | Duplex | Yes | Yes | Coast Guard |
| 82 | 157.125 | 161.725 | Duplex | Yes | Yes | |
| 83 | 157.175 | 161.775 | Duplex | Yes | Yes | Coast Guard |
| 84 | 157.225 | 161.825 | Duplex | No | Yes | Busy Tel. |
| 85 | 157.275 | 161.875 | Duplex | No | Yes | Busy Tel. |
| 86 | 157.325 | 161.925 | Duplex | No | Yes | Busy Tel. |
| 87 | 157.375 | 161.975 | Duplex | No | Yes | Busy Tel. |
| 88 | 157.425 | 162.025 | Duplex | Yes | No | Busy Tel. |

Marine Channels - Canada

| | | | | | | _ |
|---------|----------------------------------|---------|--------------|---------|------------------|------------------------|
| Channel | Frequency (MHz) Transmit Receive | | Traffic Type | Ship to | Ship to Shore | Permanent Scan List |
| Desig | | | | Ship | | Scan List |
| WX0 | _ | 163.275 | NOAA Weather | RX Only | RX Only | |
| WX1 | | 162.550 | NOAA Weather | RX Only | RX Only | |
| WX2 | | 162.400 | NOAA Weather | RX Only | RX Only | |
| WX3 | | 162.475 | NOAA Weather | RX Only | RX Only | |
| WX4 | | 162.425 | NOAA Weather | RX Only | RX Only | |
| WX5 | _ | 162.450 | NOAA Weather | RX Only | RX Only | |
| WX6 | - | 162.500 | NOAA Weather | RX Only | RX Only | |
| WX7 | l | 162.525 | NOAA Weather | RX Only | RX Only | |
| WX8 | _ | 161.650 | Can. Weather | RX Only | RX Only | |
| WX9 | | 161.775 | Can. Weather | RX Only | RX Only | |
| 01 | 156.050 | 160.650 | Duplex | Yes | Yes | |
| 02 | 156.100 | 160.700 | Duplex | Yes | Yes | |
| 03 | 156.150 | 160.750 | Duplex | Yes Yes | | |
| 04 | 156.200 | 156.200 | | Yes Yes | | |
| 05 | 156.250 | 156.250 | | Yes | Yes | |
| 06 | 156.300 | 156.300 | | Yes | No | |
| 07 | 156.350 | 156.350 | | Yes | Yes | |
| 08 | 156.400 | 156.400 | | Yes | No | |
| 09 | 156.450 | 156.450 | | Yes | Yes | Fish |
| 10 | 156.500 | 156.500 | | Yes | Yes | |
| 11 | 156.550 | 156.550 | | Yes | Yes | |
| 12 | 156.600 | 156.600 | | Yes | Yes | |
| 13 | 156.650 | 156.650 | 1W | Yes | Yes | |
| 14 | 156.700 | 156.700 | | Yes | Yes | |
| 15 | 156.750 | 156.750 | 1W | Yes | Yes | Environmental |
| 16 | 156.800 | 156.800 | | Yes | Yes | |
| 17 | 156.850 | 156.850 | 1W | Yes | Yes | |
| 18 | 156.900 | 156.900 | | Yes | Yes | |
| 19 | 156.950 | 156.950 | | Yes | Yes | |
| 20 | 157.000 | 161.600 | Duplex, 1W | Yes | Yes | |
| 21 | 157.050 | 157.050 | • • | Yes | Yes | |
| 22 | 157.100 | 157.100 | | Yes | Yes | |
| 23 | 157.150 | 161.750 | Duplex | Yes | Yes | |
| | | | | | | |

| Channel | Eroguon | ov (MILIZ) | | Ship to | Ship to | Permanent |
|---------|----------------------------------|------------|--------------|---------|---------|-------------|
| Desig | Frequency (MHz) Transmit Receive | | Traffic Type | Ship | Shore | Scan List |
| 24 | 157.200 | 161.800 | Duplex | No | Yes | Busy Tel. |
| 25 | 157.250 | 161.850 | Duplex | No | Yes | Busy Tel. |
| 26 | 157.300 | 161.900 | Duplex | No | Yes | Busy Tel. |
| 27 | 157.350 | 161.950 | Duplex | No | Yes | Busy Tel. |
| 28 | 157.400 | 162.000 | Duplex | No | Yes | Busy Tel. |
| 60 | 156.025 | 160.625 | Duplex | | | |
| 61 | 156.075 | 156.075 | | | | |
| 62 | 156.125 | 156.125 | | | | |
| 63 | | | INH | | | |
| 64 | 156.225 | 156.225 | | | | |
| 65 | 156.275 | 156.275 | | Yes | Yes | |
| 66 | 156.325 | 156.325 | | Yes | Yes | |
| 67 | 156.375 | 156.375 | | Yes | No | |
| 68 | 156.425 | 156.425 | | Yes | Yes | Fish |
| 69 | 156.475 | 156.475 | | Yes | Yes | Fish |
| 70 | RX Only | 156.525 | | | | |
| 71 | 156.575 | 156.575 | | Yes | Yes | Fish |
| 72 | 156.625 | 156.625 | | Yes | No | Fish |
| 73 | 156.675 | 156.675 | | Yes | Yes | |
| 74 | 156.725 | 156.725 | | Yes | Yes | |
| 77 | 156.875 | 156.875 | | Yes | No | |
| 78 | 156.925 | 156.925 | | Yes | Yes | |
| 79 | 156.975 | 156.975 | | Yes | Yes | |
| 80 | 157.025 | 157.025 | | Yes | Yes | |
| 81 | 157.075 | 157.075 | | Yes | Yes | Coast Guard |
| 82 | 157.125 | 157.125 | | Yes | Yes | |
| 83 | 157.175 | 157.175 | | Yes | Yes | Coast Guard |
| 84 | 157.225 | 161.825 | Duplex | No | Yes | Busy Tel. |
| 85 | 157.275 | 161.875 | Duplex | No | Yes | Busy Tel. |
| 86 | 157.325 | 161.925 | Duplex | No | Yes | Busy Tel. |
| 87 | 157.375 | 161.975 | Duplex | No | Yes | Busy Tel. |
| 88 | 157.425 | 162.025 | Duplex | Yes | No | Busy Tel. |

NWR-SAME Alert Level

| | | | V | OYAGE | R | |
|----------------------------------|----------|-----------------|---------------|-------------------|--------------|--------|
| Event Code | Standard | Warning (A1) | Watch (A2) | Statement (A3) | Test (A4) | Ignore |
| Administrative Message | ADR | | | | | 0 |
| Avalanche Warning | AVW | 0 | | | | |
| Avalanche Watch | AVA | | 0 | | | |
| Blizzard Warning | BZW | 0 | | | | |
| Civil Danger Warning | CDW | 0 | | | | |
| Civil Danger Watch | CDA | | 0 | | | |
| Civil Emergency Massage | CEM | 0 | | | | |
| Coastal Flood Warning | CFW | 0 | | | | |
| Coastal Flood Watch | CFA | | 0 | | | |
| Emergency Action Notification | EAN | 0 | | | | |
| Emergency Action Termination | EAT | 0 | | | | |
| Fire Warning | FRW | 0 | | | | |
| Flash Flood Statement | FFS | | | 0 | | |
| Flash Flood Warning | FFW | 0 | | | | |
| Flash Flood Watch | FFA | | 0 | | | |
| Flood Statement | FLS | | | 0 | | |
| Flood Warning | FLW | 0 | | | | |
| Flood Watch | FLA | | 0 | | | |
| Hazardous Material Warning | HMW | 0 | | | | |
| Hazardous Material Watch | HMA | | 0 | | | |
| High Wind/Dust Storm Warning | HWW | 0 | | | | |
| High Wind/Dust Storm Watch | HWA | | 0 | | | |
| Hurricane Statement | HLS | | | 0 | | |
| Hurricane/Tropical Storm Warning | HUW | 0 | | | | |
| Hurricane/Tropical Storm Watch | HUA | | 0 | | | |
| Immediate Evacuation Notice | EVI | 0 | | | | |
| Immediate Evacuation Warning | IEW | 0 | | | | |
| Law Enforcement Warning | LEW | 0 | | | | |
| Local Area Emergency | LAE | 0 | | | | |
| National Hazard Warning | NHW | 0 | | | | |
| National Information Center | NIC | 0 | | | | |
| National Periodic Test | NPT | | | | 0 | |

| | | | V | OYAGE | R | |
|--------------------------------|----------|---------|-------|-----------|-------|--------|
| Event Code | Standard | Warning | Watch | Statement | Test | Ignore |
| | | (A1) | (A2) | (A3) | (A4) | |
| Network Message Notification | NMN | | | | | 0 |
| Radiological Hazard Warning | RHW | 0 | | | | |
| Radiological Hazard Watch | RHA | | 0 | | | |
| Required Monthly Test | RMT | | | | 0 | |
| Required Weekly Test | RWT | | | | 0 | |
| Service Thunderstorm Warning # | SVW | O(&SVR) | | | | |
| Service Thunderstorm Watch | SVA | | 0 | | | |
| Service Weather Statement | SVS | | | 0 | | |
| Shelter In Place Warning | SPW | 0 | | | | |
| Special Marine Warning | SMW | 0 | | | | |
| Special Weather Statement | SPS | | | 0 | | |
| System Demonstration/Practice | DMO | | | | 0 | |
| Tomado Warning # | TOW | O(&TOR) | | | | |
| Tomado Watch | TOA | | 0 | | | |
| Transmitter Backup On | TXB | | | | | 0 |
| Transmitter Primary On | TXP | | | | | 0 |
| Transmitter Radiate Off | TXF | | | | | 0 |
| Transmitter Radiate On | TXO | | | | | 0 |
| Tsunami Warning | TSW | 0 | | | | |
| Tsunami Watch | TSA | | 0 | | | |
| Unrecognizable PIL | ACE | 0 | | | | |
| Volcano Warning | VOW | 0 | | | | |
| Volcano Watch | VOA | | 0 | | | |
| Winter Storm Warning | wsw | 0 | | | | |
| Winter Storm Watch | WSA | | 0 | | | |

Optional Parts and Replacement Accessories









AC Adapter (BADY0510001)

Mounting Screws

Antenna (HH9408)

Wrist Strap (RETC484647Z)









DC Adapter

Lithium Battery (VOYGER BP)

Drop-in Charger Reference Guide

Uniden Parts Department

(800)-554-3988

Hours: M-F 7:00AM to 5:00PM CST

We can also be reached on the web at www.uniden.com

Specifications

General

Channels Transmit 54 US/International/Canada

Receive 89 US/International/Canada

Weather 10 PΠ

Freq. Control

Transmit 1.5 PPM (at 25°C) Frea. Tol.

Receive 1.5 PPM (at 25°C)

Oper, Temp. -4°F (-20°C) to +122°F(+50°C)

Antenna Flexible Whip Built-in Electret type Microphone Display Liquid Crystal Display

Speaker 8Ω 1 Watt

Power Source Rechargeable Lithium Ion Battery Pack

7.4V 850 mAh

3.8 (H) x 2.4 (W) x 1.3 (D) inch Size (without antenna)

97 (H) x 62 (W) x 33 (D) mm

Weight (w/battery & antenna) 8.8 oz (250g)

Transmitter

Frequency Range 156~158 MHz Frequency Stability +10 PPM Power Output 1.0 W & 5W Spurious Emissions -70 dBc (5W)

Current Drain 700mA (1W), 1500mA (5W)

Receiver

Selectivity

Receiver Type **Double Conversion Super**

Heterodyne Phase

Locked Loop system for Local Oscillator

156~164 MHz

Frequency Range Sensitivity 0.35uV for 12dB SINAD Threshold 0.25µV Squelch Sensitivity

±6 dB 500 to 2000Hz

Frequency Response

Adjacent Channel 65 dB @ ±25 kHz

Hum & Noise Ratio 43 dB

Audio Output Power 0.6 W @ 10 % THD

Current Drain Squelched 40mA

Max. Audio 170mA

Specifications shown are typical and subject to change without notice.

Troubleshooting

■ Not enough range

Cause: Line of sight blocked

- ⇒ Increase antenna height.
- Will not transmit on 5 watt range but will transmit on the 1 watt range.

Cause: Low voltage

- ⇒ Recharge or replace the batteries.
- Will not transmit while on the charger.

Cause: Low voltage

- ⇒ The unit is not designed to transmit while on the charger. The charger does not supply enough power for transmitting.
- Battery will not charge.

Cause: Charger inoperative

⇒ Replace charger. Damage to the charger can be a result of keying up the radio while on the charger.

FCC RF EXPOSURE INFORMATION

WARNING!

Read this information before using the VOYAGER

In August 1996 the Federal Communications Commission (FCC) of the United States with its action in Report and Order FCC 96-326 adopted an updated safety standard for human exposure to radio frequency electromagnetic energy emitted by FCC regulated transmitters. Those guidelines are consistent with the safety standard previously set by both U.S. and international standards bodies. The design of the VOYAGER complies with the FCC guidelines and these international standards.

 Never allow children to operate the radio without adult supervision and the knowledge of the following guidelines.

WARNING!

It is up to the user to properly operate this radio transmitter to insure safe operation. Please adhere to the following:

Use only the supplied or an approved antenna. Unauthorized antennas, modifications, or attachments could impair call quality, damage the VOYAGER, or result in violation of FCC regulations.

Do not use the VOYAGER with a damaged antenna. If a damaged antenna comes into contact with the skin, a minor burn may result. Please contact your local dealer for a replacement antenna.

Body-worn Operation

This device was tested for typical body-worn operations using the supplied belt-clip, which typically provides a space of 1 inch from the body. To maintain compliance with FCC RF exposure requirements, body-worn operations are restricted to the supplied belt-clip.

For hand-held operation, the radio should be held 1 inch from the user's face. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements and should be avoided. For more information about RF exposure, please visit the FCC website at www.fcc.gov.

 When using an external speaker microphone, USE ONLY THE UNIDEN MODEL HHVTA07. Use of any other accessory for this purpose may invalidate your authority to operate this device.

Three-Year Limited Warranty

Important! Evidence of original purchase is required for warranty service.

WARRANTOR: Uniden

ELEMENTS OF WARRANTY: Uniden warrants for three years, to the original retail owner, this Product excluding Li-ion battery pack to be free from defects in materials and craftsmanship with only the limitations or exclusions set out below. Uniden warrants for 12 months, to the original retail owner, the Lithium Ion battery pack to be free from defects in material and craftmanship with only the limitations or exclusions set out below.

WARRANTY DURATION: This warranty to the original user shall terminate and be of no further effect 36 months (12 months for the Lithium Ion battery pack) after the date of original retail sale. The warranty is invalid if the Product is (A)damaged or not maintained as reasonable or necessary, (B)modified, altered, or used as part of any conversion kits, subassemblies, or any configurations not sold by Uniden, (C)improperly installed, (D)serviced or repaired by someone other than an authorized Uniden service center for a defect or malfunction covered by this warranty, (E)used in any conjunction with equipment or parts or as part of any system not manufactured by Uniden, or (F)installed or programmed by anyone other than as detailed by the Operation Guide for this product.

STATEMENT OF REMEDY: In the event that the product does not conform to this warranty at any time while this warranty is in effect, warrantor will either, at its option, repair or replace the defective unit and return it to you without charge for parts, service, or any other cost (except shipping and handling) incurred by warrantor or its representatives in connection with the performance of this warranty. Warrantor, at its option, may replace the unit with a new or refurbished unit. THE LIMITED WARRANTY SET FORTH ABOVE IS THE SOLE AND ENTIRE WARRANTY PERTAINING TO THE PRODUCT AND IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES OF ANY NATURE WHATSOEVER, WHETHER EXPRESS, IMPLIED OR ARISING BY OPERATION OF LAW, INCLUDING, BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY DOES NOT COVER OR PROVIDE FOR THE REIMBURSEMENT OR PAYMENT OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. Some states do not allow this exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to you.

LEGAL REMEDIES: This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

This warranty is void outside the United States of America.

PROCEDURE FOR OBTAINING PERFORMANCE OF WARRANTY: If, after following the instructions in this Operating Guide you are certain that the Product is defective, pack the Product carefully (preferably in its original packaging). The Product should include all parts and accessories originally packaged with the Product. Include evidence of original purchase and a note describing the defect that has caused you to return it. The Product should be shipped freight prepaid by traceable means to warrantor at:

Uniden America Corporation
Parts and Service Division
4700 Amon Carter Blvd.
Ft Worth, TX 76155
(800) 235-3874, 8 AM to 5 PM. Central. Monday through Friday

Thank you for purchasing a Uniden Marine Radio.

A World Without Wires **Uniden***

www.uniden.com

FCC WANTS YOU TO KNOW
Changes or modifications to this product not expressly approved by
Uniden, or operation of this product in any way other than as detailed
by the owner's manual, could void your authority to operate this product.

© 2002 Uniden America Corporation, Fort Worth, TX All rights reserved.
Contains additional foreign articles.

Custom manufactured in the Philippines.

UTZZ01889ZA

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com