


TrueNet®

CopperTen® Modular Jack

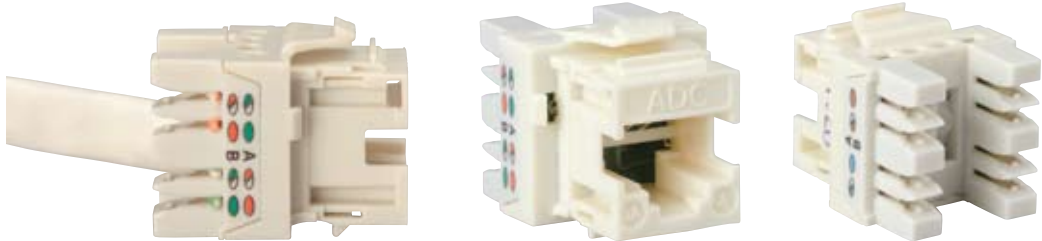

An integral part of ADC's TrueNet® Structured Cabling System, CopperTen® is the world's first UTP structured cabling system to enable 10 Gigabit Ethernet over a full 100 meters. Installed in high-performance networks worldwide, the system's patent-pending design minimizes alien crosstalk and insertion loss and meets the performance requirements of IEEE 802.3an and TIA/EIA 568-B.2-10 standards.

The CopperTen modular jack features LSA-PLUS® silver-plated 45° angled contacts for the most secure and reliable connection available. CopperTen jacks are available in 10 colors for unique port identification and mount in any of ADC's modular station outlets.

Features:

- Forty-five degree silver-plated IDCs provide secure, reliable gas-tight connections
- Integrated conductor manager separates individual cable pairs for improved performance
- Accepts KRONE® or 110-style wire termination tools
- Universal A/B wiring label
- UL 1863 listed
- Product Warranty — 20 years

SPEC SHEET



www.adc.com • +1-952-938-8080 • 1-800-366-3891



Specifications

Operating Temperature Range:

-10° to 60° C (14° to 140° F)

RJ Socket, 8 Positions, General Specification:

FCC Part 68.500 (IEC 60603-7)

Transmission Performance and Reliability:

TIA/EIA 568-B.2-10 standards

Number of Plug Insertion Cycles:

≥750 (IEC/EN 60603-7)

LSA-PLUS Insulation Displacement

Wire Diameter Range for Solid and Stranded Copper Conductors:

22-24 AWG 0.50 mm to 0.65 mm (0.019" to 0.025")

Wire Insulation Diameter Range

1.04 mm to 1.60 mm (0.041" to 0.063")

(PE, PVC):

Contact Resistance:

≤ 1 mΩ typical

Contact Re-termination:

≥ 200

Insulation Resistance at 40 °C (104 °F) and 93% RH:


≥ 500 MΩ (IEC 512-2-30)

Safety Rating:

UL 1863

Flammability Rating:

UL 94 V-0

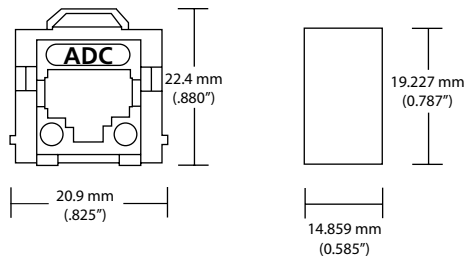

Ordering Information

Description	Catalog Number
CopperTen® RJ45 UTP modular 568A/B jack	6830 1 835-XX

Substitute XX in the part number for the desired color

01=White, 02=Ivory, 03=Gray, 04=Black, 05=Red, 06=Blue, 07=Green, 08=Yellow, 09=Purple, 10=Orange

SPEC SHEET



Website: www.adc.com

From North America, Call Toll Free: 1-800-366-3891 • Outside of North America: +1-952-938-8080

Fax: +1-952-917-3237 • For a listing of ADC's global sales office locations, please refer to our website.

ADC Telecommunications, Inc., P.O. Box 1101, Minneapolis, Minnesota USA 55440-1101

Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, ADC reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting our headquarters office in Minneapolis. ADC Telecommunications, Inc. views its patent portfolio as an important corporate asset and vigorously enforces its patents. Products or features contained herein may be covered by one or more U.S. or foreign patents. An Equal Opportunity Employer

105506AE 5/08 Revision © 2008, 2007, 2005 ADC Telecommunications, Inc. All Rights Reserved

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>