

# AKG ACOUSTICS

# AKG ACOUSTICS

## AKG Acoustics GmbH

Lemböckgasse 21–25, P.O.B. 158, A-1230 Vienna/AUSTRIA

Tel: (+43 1 ) 86 654-0\*, Fax: (+43 1) 86 654-7516

www.akg.com, e-mail: sales@akg.com

Hotline: (+43 676) 83200 888, hotline@akg.com

## AKG ACOUSTICS, U.S.

914 Airpark Center Drive, Nashville, TN 37217, U.S.A.

Tel: (+1 615) 620-3800, Fax: (+1 615) 620-3875

www.akgusa.com, e-mail: akgusa@harman.com

For details on other AKG products or Distributors ask  
your dealer or visit [www.akg.com](http://www.akg.com)  
Specifications subject to change without notice.

**H** A Harman International Company

12/04/PROA 1516

[www.akg.com](http://www.akg.com)



## CCS — Crystal Clear Sound Series Microphones Headphones



# D 11/XLR Dynamic Microphone

## for bass instruments

- Dynamic microphone designed for low-pitched instruments
- Powerful sound with gutsy bass range
- Handles highest sound pressure levels with ease
- Integrated stand adapter
- Rugged all-metal body withstands typical tough handling on stage
- Complete with 16 foot (5 m) microphone cable



2



### SPECIFICATIONS

Frequency range: 20 Hz to 20 kHz  
Polar pattern: cardioid  
Sensitivity: 2.5 mV/Pa  
Standard accessory: 16 ft. (5 m) XLR/XLR cable


# D 22/XLR Dynamic Microphone

## for instruments

- Dynamic microphone designed for drums and percussions, wind instruments and guitar amps
- Response tailored for neutral reproduction of instrument sounds
- Integrated stand adapter and external bracket for easy mounting on stands or drums
- Rugged all-metal body withstands typical tough handling on stage
- Complete with 16 foot (5 m) microphone cable



3



### SPECIFICATIONS

Frequency range: 60 Hz to 18 kHz  
Polar pattern: cardioid  
Sensitivity: 2.5 mV/Pa  
Standard accessories: 16 ft. (5 m) XLR/XLR cable  
H 440 mounting bracket

CCS – Crystal Clear Sound

# D 44 S Dynamic Microphone

for vocals/Karaoke

- Vocal/general-purpose microphone
- Designed for hi-fi recording and Karaoke use
- On/off switch
- Rugged wire mesh cap with internal protective basket
- 16 foot (5 m) cable w/mini jack and 1/4" adapter




4



## SPECIFICATIONS

Frequency range: 70 Hz to 18 kHz  
Polar pattern: cardioid  
Sensitivity: 2.5 mV/Pa  
Standard accessories: fixed 16 ft. (5 m) cable  
w/mini jack plug  
mini to 1/4" adapter plug



CCS – Crystal Clear Sound


# D 55 S Dynamic Microphone

for vocals/Karaoke

- Vocal/general-purpose microphone
- Sturdy die-cast metal body
- Designed for hi-fi recording and Karaoke use
- On/off switch
- Rugged wire mesh cap with internal protective basket
- 16 foot (5 m) cable w/mini jack and 1/4" adapter



5

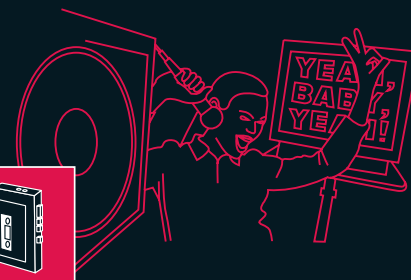

## SPECIFICATIONS

Frequency range: 70 Hz to 18 kHz  
Polar pattern: cardioid  
Sensitivity: 2.5 mV/Pa  
Standard accessories: fixed 16 ft. (5 m) cable  
w/mini jack plug  
mini to 1/4" adapter plug



CCS – Crystal Clear Sound

# D 77 S Dynamic Microphone

for backing vocals and instruments

XLR/Jack

- Rugged performance microphone designed for backing vocals and instruments
- Available with 16 foot (5 m) XLR/XLR cable or 16 foot (5 m) XLR/jack cable
- On/off switch
- Rugged wire mesh cap with internal protective basket
- Sturdy die-cast metal body
- Complete with stand adapter



6



## SPECIFICATIONS

Frequency range: 40 Hz to 20 kHz


Polar pattern: cardioid

Sensitivity: 2.5 mV/Pa

Standard accessories: stand adapter

D 77 S/XLR: 16 foot (5 m) XLR to XLR cable

D 77 S/Jack: 16 foot (5 m) XLR to 1/4" jack cable



CCS – Crystal Clear Sound

# D 88 S Dynamic Microphone

for lead vocals

XLR/Jack

- Rugged performance microphone designed for lead vocals
- Available with 16 foot (5 m) XLR/XLR cable or 16 foot (5 m) XLR/jack cable
- On/off switch
- Rugged wire mesh cap with internal protective basket
- Sturdy die-cast metal body
- Complete with stand adapter



7



## SPECIFICATIONS

Frequency range: 40 Hz to 20 kHz


Polar pattern: supercardioid

Sensitivity: 2.5 mV/Pa

Standard accessories: stand adapter

D 88 S/XLR: 16 foot (5 m) XLR to XLR cable

D 88 S/Jack: 16 foot (5 m) XLR to 1/4" jack cable



# Headphones

## K 44

- Closed-back stereo headphones
- Powerful sound with low-down bass and clean highs
- Soft, supraaural, leatherette ear pads
- AKG self-adjusting headband for maximum comfort



### SPECIFICATIONS

Weight (without cable): approx. 190 g (6.7 oz.)  
Frequency range: 18 Hz to 20 kHz  
Sensitivity: 115 dB SPL/V  
Cable: single-entry, 8 ft. (2.5 m) long  
Adapter plug: mini to 1/4"

8

## K 55

- Closed-back, circumaural stereo headphones
- High ambient-noise attenuation
- TurboBass feature for powerful sound
- Excellent wearing comfort




### SPECIFICATIONS

Weight (without cable): approx. 210 g (7.4 oz.)  
Frequency range: 16 Hz to 20 kHz  
Sensitivity: 114 dB SPL/V  
Cable: single-entry, approx. 10 ft. (3 m) long  
Adapter plug: mini to 1/4"

## K 66

- Excellent price/performance
- Semi-open, circumaural stereo headphones
- Natural Sound design for airy, pristine sound
- AKG self-adjusting headband and leatherette ear pads for maximum comfort

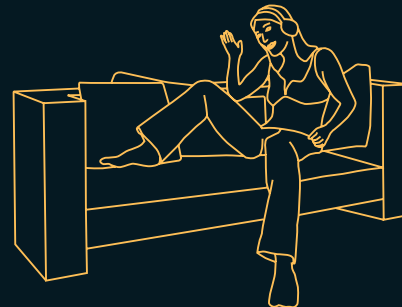

### SPECIFICATIONS

Weight (without cable): approx. 210 g (7.4 oz.)  
Frequency range: 18 Hz to 22 kHz  
Sensitivity: 112 dB SPL/V  
Cable: single-entry, approx. 10 ft. (3 m) long  
Adapter plug: mini to 1/4"

9

# Headphones


## K 26 P

- Folding, closed-back miniature headphones with 40 mm (1.6 in.) speakers
- High ambient-noise attenuation plus fabulous sound
- Extremely lightweight headphones
- 3D-Axis design folds headphones into minimum space



### SPECIFICATIONS

**Weight (without cable):** approx. 73 g (2.6 oz.)  
**Frequency range:** 12 Hz to 26 kHz  
**Sensitivity:** 125 dB SPL/V  
**Cable:** 5 ft. (1.5 m) long, with mini jack plug  
**Standard accessory:** carrying bag



## K 306 AFC

- Lightweight, UHF wireless stereo headphones
- Autotuning function for reliable reception
- High quality radio signal penetrates walls and ceilings
- Transmitter doubles as storage cradle and charger for headphones
- Single transmitter can be used with many headphones at once



### SPECIFICATIONS

**Transmitter weight:** approx. 275 g (9.7 oz.)  
**Headphones weight:** approx. 180 g (6.4 oz.)  
**Audio bandwidth:** 20 Hz to 22 kHz  
**Max. sound pressure level:** 103 dB SPL  
**Battery life:** approx. 10 hours  
(2 AAA size NiCd rechargeable batteries)  
**Carrier frequency:** 864 MHz  
**Range:** approx. 100 m\*  
\* under ideal transmission conditions (free-field)



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>