



# OC-3c/STM 1

## Total Access 3000 DSLAM OC-3c/STM 1 Cell Switch Module for ATM

### Product Features

- SONET OC-3c IR-1 optical interface
- Dual SC optical connection
- SONET compliant
- SONET level performance monitoring
- SONET line protection switching
- Unchannelized network interface
- NEBS Level 3, GR-1089, and UL 1950 compliant
- ITU-T Recommendation I.432
- ITU-T Recommendation G.957
- UNI v3.1
- ATM Forum STS-3c
- Operating temperature range of  $-40^{\circ}\text{C}$  to  $+65^{\circ}\text{C}$

The ADTRAN OC-3c/STM 1 Cell Switch Module installs into a single CSM slot in the Total Access DSLAM chassis and interfaces to the network via SC connectors that attach to the circuit board through the faceplate. A dual configuration is optional for redundant capability, with the system being fully functional with only a single MUX installed.

Standard traffic types such as UBR, CBR, rt-VBR, and nrt-VBR, are supported for data and Voice over DSL (VoDSL) services. The CSM employs traffic prioritizing and policing on a per VC (Virtual Circuit) basis to ensure proper delivery of customer data.

Efficient data delivery is maximized through early packet discard and partial packet discard. Substantial buffers are also utilized to optimize data throughput.

The Total Access OC-3c/STM 1 CSM supports both local and remote management. Operation, Administration, Maintenance, and Provisioning (OAM&P) tasks can be performed through the OS interface on the SCU. Remote management via Telnet, Total Access Element Management System (EMS), TL1, and SNMP is supported through the SCU. Reporting and managing of the QoS is also supported. The OC-3c//STM 1 CSM also exercises synchronized Performance Monitoring (PM) and provisioning between active and standby units.



ADTRAN, Inc.  
Corporate Headquarters  
Attention:  
International Department  
901 Explorer Boulevard  
Huntsville, Alabama 35806  
USA

[www.adtran.com](http://www.adtran.com)

Asia Pacific—Beijing, China  
+86 10 8857-6415 voice  
+86 10 8857-6417 fax  
[sales.china@adtran.com](mailto:sales.china@adtran.com)

Asia Pacific—Hong Kong, China  
+852 2824-8283 voice  
+852 2824-8928 fax  
[sales.asia@adtran.com](mailto:sales.asia@adtran.com)

Asia Pacific—Guangzhou, China  
+86 20 8384-6015 voice  
+86 20 8384-7127 fax  
[sales.china@adtran.com](mailto:sales.china@adtran.com)

Asia Pacific—Melbourne, Australia  
+61 3-9658-0500 voice  
+61 3-9658-0599 fax  
[sales.australia@adtran.com](mailto:sales.australia@adtran.com)

European/Middle East/Africa—  
Bad Homburg, Germany  
+49 6172-483-2304 voice  
Germany  
+1 256-963-8695 voice  
Alabama, USA  
+49 6172-483-2305 fax  
Germany  
[sales.europe@adtran.com](mailto:sales.europe@adtran.com)

Latin America/Caribbean  
+1 954-474-4424 voice  
Florida, USA  
+1 256-963-7551 voice  
Alabama, USA  
+1 954-474-1298 fax  
Florida, USA  
[sales.latin@adtran.com](mailto:sales.latin@adtran.com)

Mexico  
+1 954-474-4424 voice  
Florida, USA  
+1 256-963-7551 voice  
Alabama, USA  
+1 954-474-1298 fax  
Florida, USA  
[sales.mexico@adtran.com](mailto:sales.mexico@adtran.com)

U.S. Headquarters  
Huntsville, Alabama USA  
+1 256-963-8000 voice  
+1 256-963-8669 voice  
+1 256-963-6300 fax  
[international@adtran.com](mailto:international@adtran.com)



I.S. EN ISO 9001  
ADTRAN is a  
ISO 9001 registered company.



TL 9000  
ADTRAN is a  
TL 9000 registered company.

I-61181044L1-8A April 2003  
Copyright © 2003 ADTRAN, Inc.  
All rights reserved.

## Total Access 3000 DSLAM OC-3c/STM 1 Cell Switch Module for ATM

### Product Specifications

#### Faceplate Features

##### LED Indicators

- Power/Fail
- Alarm Status (local/remote)
- Optics Status (LOL, Laser failure, etc.)
- Test
- ATM
- Clock
- Lockout
- On Line

##### Other Faceplate Features

- Manual Protection Switch
- Automatic Protection Switch (APS) pushbutton

##### Mechanical

- Single Total Access DSLAM multiplexer slot
- OC-3c/STM 1 interface to fiber through the faceplate

##### Interfaces

- **Network Interface:** SC connectors via the faceplate
- **Subscriber Interface:** Total Access DSLAM DSL facilities

#### Electrical

- **Power requirements:** -42 VDC to 156 VDC input range

#### Regulatory Standards

- NEBS Level 3
- GR-1089-CORE
- UL 1950

#### Management

##### Local and Remote

- Telnet, SNMP, Total Access, TL1

##### ATM Switching


- PVC's: UNI 16,000; NNI 16,000

#### Environmental

- **Operating:** -40°C to +65°C
- **Storage:** -40°C to +85°C
- **Relative Humidity:** 0 to 95 percent, non-condensing

### Ordering Information

Equipment	Part #
Total Access 3000 OC-3c CSM for ATM	1181044L1
Total Access 3000 STM 1 CSM for ATM	1181044L2

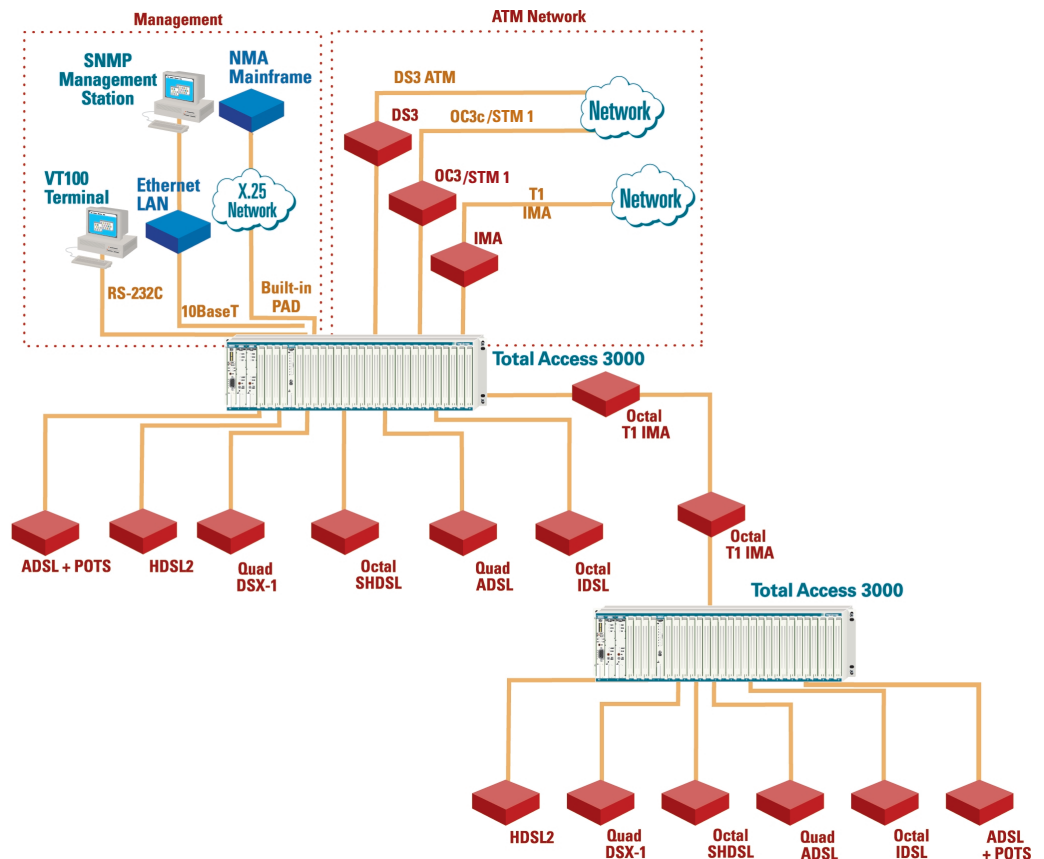

Specifications subject to change without notice. ADTRAN is a trademark of ADTRAN, Inc. and/or its affiliates in the U.S. and certain other countries. Total Access is a registered trademark of ADTRAN, Inc. in the U.S. All other trademarks mentioned in this document are the property of their respective owners.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>