



ADP-40 Analog Door Phone

Weather Resistant Entry Way Phone

Product Features

- Attactive, brushed stainless-steel faceplate
- Compact size: mounts flush in any single gang electrical box
- Hands free communications
- Monitor mode: auto answer enables the caller to remotely monitor the area around the speaker phone
- Weather Resistant:
 - Mylar Speaker
 - Faceplate, microphone, and Speaker Gaskets
 - Sealed Push Button
 - Self draining microphone mount
- Vandal Resistant:
 - 18-guage Stainless-steel faceplate
 - Stainless-steel push button and speaker screen
 - Hex drive mounting screws
- Power: receives power from the telephone line
- Microphone and speaker volume controls

The ADTRAN® ADP-40 is an analog speaker-phone primarily used for entry applications such as door or gate communication, business delivery entrances, and residential, commercial, or industrial door security. The ADP-40 complements the NetVanta 7000 line by providing a rugged communication endpoint to any entry way. Once a person's identity is announced through the door phone, a phone user enters a special code which allows the door to open.

The ADP-40 offers a weather-resistant design that is easy to install in new or existing construction. It fits flush in any single gang electrical box and receives power directly from the telephone line. With weather and vandal resistant features that include an 18-guage stainless steel faceplate, Mylar speaker, hex drive mounting screws, a stainless steel speaker screen, and gaskets for the faceplate, microphone, and speaker, the ADP-40 can be installed inside or outside.


This full featured entry phone supports auto answer to enable remote communications of the area immediately around the speakerphone, intelligent call progress detection for automatic hang-up when a call is completed, and microphone and speaker volume controls.

The ADP-40 conveniently connects directly to one of the analog station (FXS) ports on the NetVanta 7100. The user account for the station port can be configured as a hotline phone to allow the ADP-40 to call a specific extension or a ring group when the Call button is pressed. Once off hook, a phone user dials a code that controls the relay latch to open the door.

Applications:

The Door Phone, when used with the door relay on the NetVanta 7100, offers a convenient solution for customers that need:

- Door or gate communication
- Residential, commercial and industrial door security
- Business delivery entrances
- Communication with delivery and employee entrances

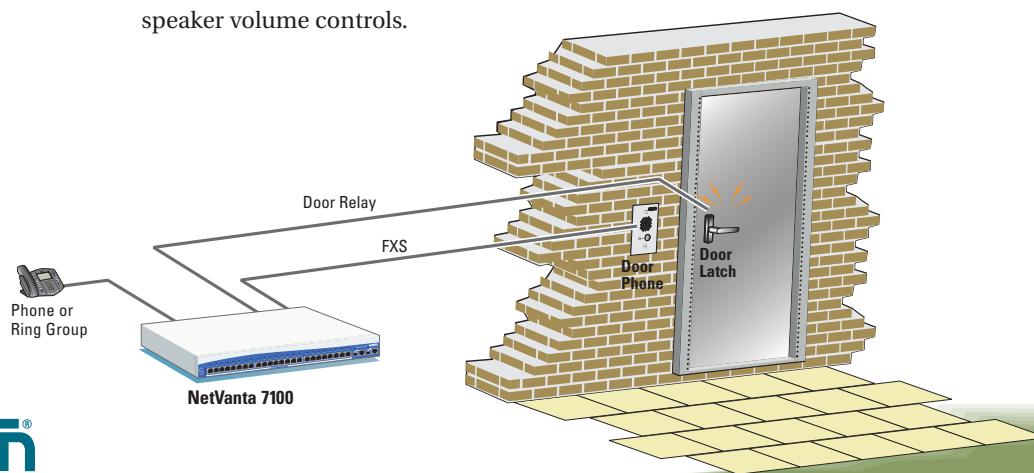



ADTRAN, Inc.

Attn: Enterprise Networks
901 Explorer Boulevard
Huntsville, AL 35806

P.O. Box 140000
Huntsville, AL 35814-4000

256 963-8000 voice
256 963-8699 fax

General Information

800 9ADTRAN
info@adtran.com
www.adtran.com

Pre-Sales

Technical Support

800 615-1176 toll-free
application.engineer@adtran.com
www.adtran.com/support

Where to Buy

877 280-8416 toll-free
channel.sales@adtran.com
www.adtran.com/where2buy

Post-Sales

Technical Support

888 423-8726
support@adtran.com
www.adtran.com/support

ACES Installation & Maintenance Service

888 874-ACES
aces@adtran.com
www.adtran.com/support

International Inquiries

256 963 8000 voice
256 963-6300 fax
international@adtran.com
www.adtran.com/international

For the regional office nearest you, visit:

www.adtran.com/regional

To download a searchable version of the ADTRAN Enterprise Networks Catalog, visit:

www.adtran.com/ecatalog



ADTRAN is an ISO 9001, ISO 14001 and a TL 9000 certified supplier.

61200761L1-8A April 2006
Copyright © 2006 ADTRAN, Inc.
All rights reserved.

ADP-40 Analog Door Phone

Weather Resistant Entry Way Phone

Product Specifications

Power

- Telephone line powered (18 VDC, 30 mA minimum)

Ring Voltage

- 25 VAC RMS minimum (for auto answer)

Speaker Volume

- Approximately 62 dB maximum at 1 meter

Forward Disconnect Time Out

- 500 ms, battery removal

REN

- 0.8A

Connectors

- Two 19–26 guage gel-filled connectors

Compliance

- FCC Part 15 Class B ACTA/FCC Part 68
- IC CS-03
- UL/CUL 60950

Faceplate Dimensions

- 4.88-inch H x 3.13-inch W x 0.18-inch D
(123.8 mm H x 79.4 mm W x 4.6 mm D)

Shipping Weight

- 1.0 lb (0.45 kg)

Operating Temperature

- -15°F to 130°F (-26°C to 54°C)

Relative Humidity

- 5 to 95 percent humidity, noncondensing

Warranty

- 1 Year

Ordering Information

Equipment	Part #
ADP-40 Analog Door Phone	1200761L1
NetVanta 7100	1200796L1
Analog 4-Port Station (FXS) VIM	1200690L1
IP Phones and Accessories	
IP 501	1200777L1
IP 601	1200778L1
IP 601 Expansion Module	1200779L1
IP 4000	1200789L1
IP SoftPhone (5-pack)	1950859L1
IP 501 AC Adapter (5-pack)	1200767L1
IP 501/601 Wallmount Kit	1200762L1

Specifications subject to change without notice. ADTRAN and NetVanta are registered trademarks of ADTRAN, Inc. All registered trademarks and trademarks mentioned in this publication are the property of their respective owners.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>