

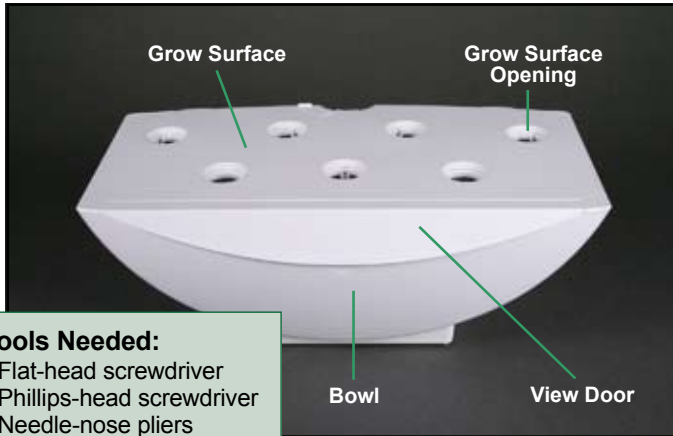


Directions for Replacing AeroGarden™ Pump

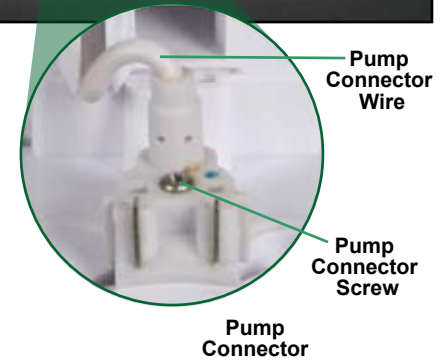

Tools Needed:

- Flat-head screwdriver
- Phillips-head screwdriver
- Needle-nose pliers

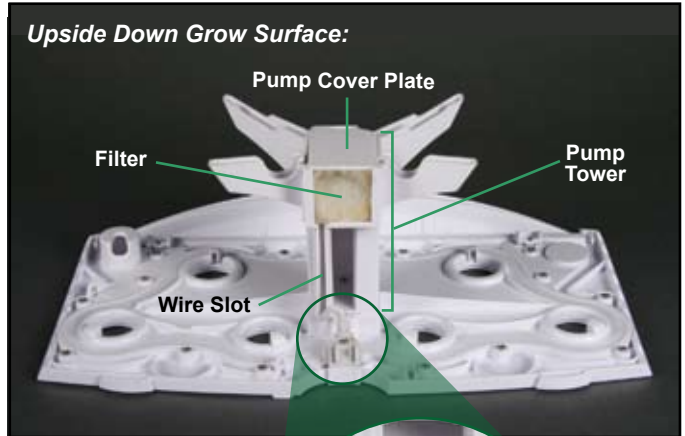


Removing Old Pump

- 1 Unplug AeroGarden.
- 2 Remove the *Bowl* from the *Base*. Do not empty the water.
- 3 Remove the *Grow Surface* from the *Bowl* and place on a counter covered by a towel (your roots will be dripping with water).


Hint: Lift the View Door and slide one hand into the Bowl to lift. Don't worry if you gently tear some roots.




- 4 Gently remove each plant from its *Grow Surface Opening* and place the plants upright in the *Bowl* so that the roots are in the water.
Hint: Note where the plants were positioned on the Grow Surface.
- 5 Turn the *Grow Surface* upside down on the towel, with the back of the *Pump Tower* facing you. (see top right photo)
- 6 Take out *Pump Filter*, rinse it (no soap) and set it aside.

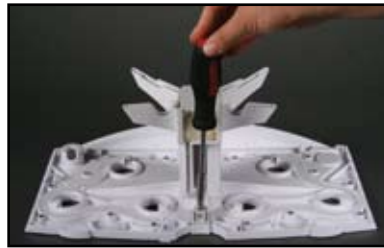


- 7 Remove the *Pump Connector Screw* in the *Pump Connector* using a Phillips-head screwdriver.

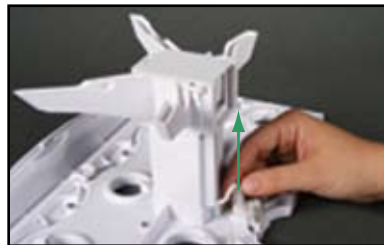

- 8 Pull up on *Pump Connector* to disconnect it from the bottom of the *Grow Surface*.

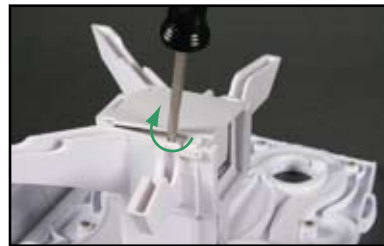


- 9 Remove *Pump Cover Plate* – insert flat-head screwdriver into each of the 3 rectangular slots and turn screwdriver 90° to help pry out the cover plate. It is okay to use force.

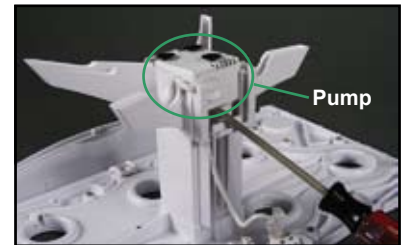

- 10 Remove the *Pump* by inserting the flat-head screwdriver into the space under the pump. Push down on the handle of the screwdriver to lift the *Pump* out of the *Pump Tower*.

- 11 Pull wire out of *Wire Slot*. Discard old *Pump* in trash.

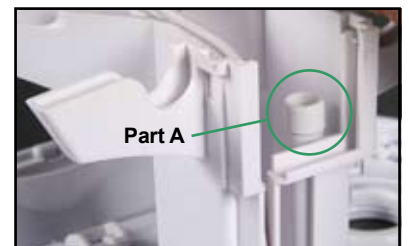

- 12 Remove part A with needle-nose pliers and discard in trash.


Installing New Pump



- 13** Adjust *Pump Dial* to the 2 o'clock position (2 clicks).




- 14** Insert the new *Pump* into the *Pump Tower* making sure that:
- The rubber feet of the *Pump* are facing up.
 - The *Pump Connector Wire* goes behind and underneath the *Pump*.
 - Pump Cover Plate* is snapped back onto top of *Pump*.

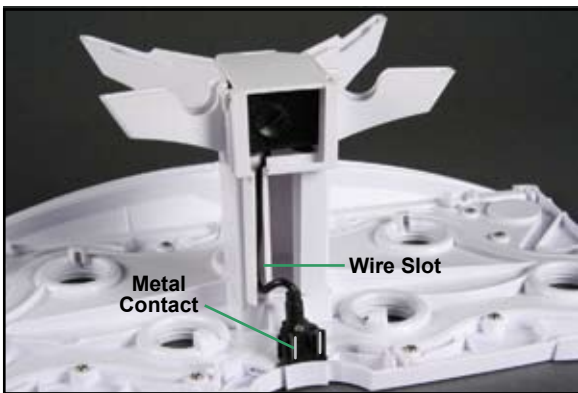

- 15** Plug the *Pump Connector* into the *Grow Surface* so that the *Metal Contacts* face up and out and the *Connector Wire* is inside the *Wire Slot*.



- 16** Replace and screw in the *Connector Screw* so it is hand-tight (no power tools, please!)

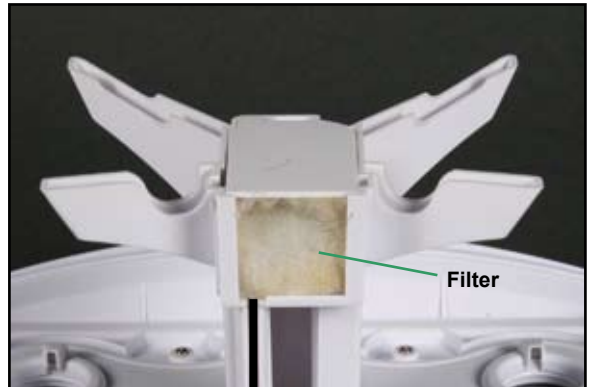

- 17** Place *Pump Filter* back into slot.
- 18** Place *Grow Surface* upright on towel and gently replace plants back into their original positions on the *Grow Surface*.
- 19** Place *Grow Surface* back into bowl and replace bowl on the *Base*. Press down firmly on the *Grow Surface*.

Congratulations...
You have replaced your
AeroGarden Pump!

If you have any questions please feel free to contact Customer Service:

1-800-GROW-NOW (1-800-476-9669) or email: info@aerogrow.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>