



ATC-36



ATC-48

OPEN AIR COOLERS

ATC-36 / ATC-48

Key Features

- Custom Designed for Easy Product Access
- Integrated Vertical Lighting in Each Post
- Electronic Temperature Control With Digital Readout
- Automatic Defrost and Heated Drain Pan
- Pull Down Night Curtain
- Adjustable Dual Position Shelves
- High Impact Graphics Available

Model	Doors	Capacity cu.ft (lt)	Shelves	Exterior Dimensions inches (mm)			Interior Dimensions inches (mm)			Power (V-Hz-Ph)	Amps	HP	Crated Weight lbs (kg)
				L	D	H	L	D	H				
ATC-36	NA	27 1/4 (770)	4	36 (914)	33 (840)	78 (1980)	31 3/4 (806)	27 1/2 (700)	53 1/2 (1360)	220.60.1	9	3/4	484 (220)
ATC-48	NA	37 1/2 (1060)	4	48 (1219)	33 (840)	78 (1980)	44 (1117)	27 1/2 (700)	53 1/2 (1360)	220.60.1	9	3/4	572 (260)

Details

Cabinet Construction

- Exterior: Galvanized metal cabinet with impact resistant extruded plastic accent panels - gray.
- Large low-E double pane tempered thermal glass side panels for increased product visibility.
- Interior: Epoxy powder coated steel for increased durability and easy cleaning.
- High-density, CFC-Free, polyurethane insulation.
- Manual pull down night curtain for increased energy efficiency.
- Low profile fixed wheels allow for easy movement of unit and facilitate cleaning of surrounding area.

Shelving

- Four (4) heavy duty epoxy powder coated steel shelves:
 - ATC 36: 31 ½" x 20 ½" (800 x 521)
 - ATC 48: 43 ½" x 20 ½" (1105 x 521)
- All shelves are dual position allowing for horizontal or gravity fed positions, and are adjustable in 1" increments.
- Designed to allow use of shelf pricing strips.

Lighting

- Fluorescent vertical lights mounted in each post and horizontal overhead light provide for maximum illumination of products.
- Utilizes T8 bulbs and an electronic ballast for increased energy efficiency and extended life.

Electrical

- Ready for connection to 208V/ 60Hz single phase 20 amp dedicated outlet.
- Includes an 8' cord and plug set.



NEMA L6-20R

Refrigeration System

- Self-contained environmentally friendly refrigeration system using CFC-free R404A refrigerant.
- Self-contained heated drain pan and condensate evaporation system.
- Automatic self-defrost cycle.
- Electronic temperature control with digital readout maintains 34°F to 41°F (1°C to 5°C).
- Bottom mounted refrigeration unit slides out for easy maintenance and service.


Recommended Operating Conditions

- This unit is best suited for an environment where temperatures remain below 80°F (24°C) and humidity does not exceed 55%.
- Open Air models should not be installed in any area where the air curtain will be frequently disrupted. This includes placing near an HVAC vent, open doorway, or fan.
- Areas with direct sunlight should also be avoided.

Operating Conditions

- Custom Graphics
- Additional Shelves
- Pricing Strips
- 3" heavy duty casters
- Various Cabinet Colors

Technical Drawings

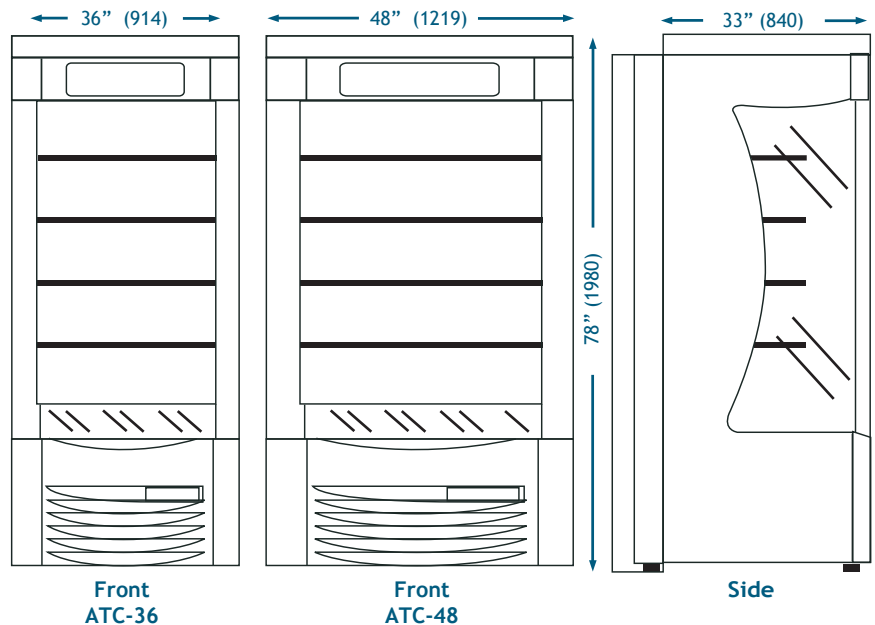

ATC-36/48



3235 Industry Drive • Suite C
North Charleston, SC 29418
Phone: 843-767-6855
Toll Free: 800-905-4768

Fax: 843-767-6858
Toll Free Fax: 800-906-4768
www.atcgroup.net
sales@atcgroup.net

WARRANTY

One year warranty on all parts and labor and an additional 4 year prorated warranty on compressor.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>