



OPEN AIR COOLERS

OPXS

Key Features

- Counter Top Open Air Unit
- Custom Designed for Easy Product Access
- Integrated Vertical Lighting in Each Post
- Electronic Temperature Control
- Automatic Defrost and Heated Drain Pan
- Adjustable Dual Position Shelves
- High Impact Graphics Available

| Model | Doors | Capacity cu.ft (lt) | Shelves | Exterior Dimensions inches (mm) | | | Interior Dimensions inches (mm) | | | Power (V-Hz-Ph) | Amps | HP | Crated Weight lbs (kg) |
|-------|-------|------------------------|---------|------------------------------------|-----------------|-----------------|------------------------------------|-----------------|-----------------|--------------------|------|-----|------------------------------|
| | | | | L | D | H | L | D | H | | | | |
| OPXS | NA | 2 1/2 (72) | 2 | 17 3/4 (450) | 17 3/8 (440) | 36 1/4 (940) | 15 (380) | 13 5/8 (345) | 21 5/8 (550) | 115.60.1 | 3 | 1/5 | 93 (42.3) |

Details

Cabinet Construction

- Exterior: Galvanized metal cabinet with impact-resistant, extruded plastic accent panels - gray.
- Large low-E double pane tempered thermal glass side panels for increased product visibility.
- Interior: Epoxy powder coated steel for increased durability and easy cleaning.
- High-density, CFC-free, polyurethane insulation.
- Four (4) low profile adjustable feet.

Shelving

- Two (2) heavy duty galvanized wire shelves: 14 1/4" x 10 5/8" (361 x 270).
- All shelves are dual position allowing for horizontal or gravity fed positions and are adjustable in 3/8" inch increments.

Lighting

- Fluorescent vertical lights mounted in each post and horizontal overhead light provide for maximum illumination of products.
- Utilizes a T8 bulb and an electronic ballast for increased energy efficiency and extended life.

Electrical

- Ready for connection to 115V/60Hz single phase 20 amp dedicated outlet.
- Includes an 8' cord and plug set.



NEMA 5-15R

Refrigeration System

- Self-contained environmentally-friendly refrigeration system using CFC-free R134A refrigerant.
- Self-contained heated drain pan and condensate evaporation system.
- Automatic self-defrost cycle.
- Electronic temperature control with digital readout maintains 34°F to 41°F (1°C to 5°C).
- Bottom mounted refrigeration unit slides out for easy maintenance and service.


Recommended Operating Conditions

- This unit is best suited for an environment where temperatures remain below 80°F (24°C) and humidity does not exceed 55%.
- Open air models should not be installed in any area where the air curtain will be frequently disrupted. This includes placement near an HVAC vent, open doorway, or fan.
- Areas with direct sunlight should also be avoided.

Options

- 208-230V/ 50Hz
- Custom Graphics
- Additional Shelves
- Various Cabinet Colors

Technical Drawing

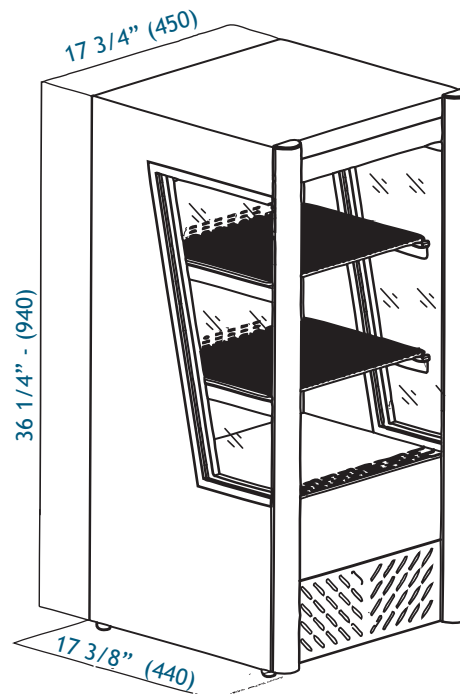

OPXS



3235 Industry Drive • Suite C
North Charleston, SC 29418
Phone: 843-767-6855
Toll Free: 800-905-4768

Fax: 843-767-6858
Toll Free Fax: 800-906-4768
www.atcgroup.net
sales@atcgroup.net

WARRANTY

One year warranty on all parts and labor and an additional 4 year prorated warranty on compressor.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>