




EXPERIENCE MORE
.: FREEDOM .:

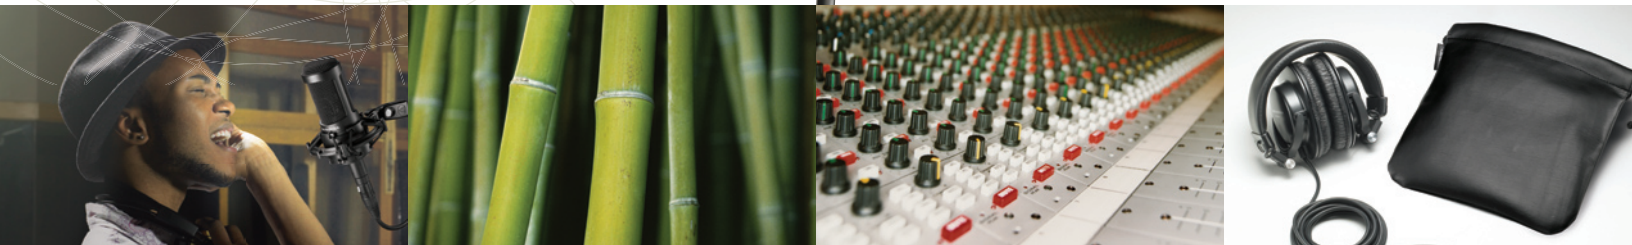

ATH-M35

Closed-back Dynamic Stereo Monitor Headphones

Fold them up, toss them in their storage pouch & take them on the road. Introducing Audio-Technica's ATH-M35 dynamic stereo headphones. Created especially for field recording and studio tracking/mixing, these compact folding headphones offer beautifully balanced, articulate sound; impressive power-handling; and a lightweight, ergonomic design. Wherever your music takes you, experience more.

 **audio-technica**
always listening

**ATH-M35***Closed-back Dynamic Stereo Monitor Headphones***Clear sound & impressive power handling in a compact, folding design**

Audio-Technica ATH-M35 Closed-back Dynamic Stereo Monitor Headphones deliver exceptional clarity and balanced, highly articulate sound reproduction. These compact folding headphones are ideal for field recording and studio tracking/mixing.

At the heart of each ATH-M35 earpiece, a 40 mm rare-earth neodymium driver offers impressive power handling for tracking sessions. Generously padded circumaural (around-the-ear) ear cups provide acoustic isolation and long-wearing comfort for extended listening sessions; the adjustable headband is also crafted and cushioned for listening comfort. Other premium-quality components include a single-sided cable constructed of ultra-flexible litz wire, and a gold-plated stereo 1/8" connector with strain-relief spring and professional screw-on 1/4" adapter.

- **Folding design for compact transport & storage**
- **40 mm neodymium drivers & extended frequency response for clear, balanced sound reproduction**
- **Ideal for field recording, studio tracking and mixing**
- **Closed-back, around-the-ear design with insulated earcups for superior isolation**
- **Ergonomic design with adjustable cushioned headband & soft, padded ear cushions**
- **Exceptional clarity and sonic accuracy for mixing**
- **High power handling for tracking sessions**
- **Sturdy, ultra-flexible litz wire 11' cable**
- **Gold-plated stereo 1/8" connector with strain-relief spring and screw-on 1/4" adapter**

Specifications†

TYPE	Closed-back dynamic
DRIVER DIAMETER	40 mm
MAGNET	Neodymium
VOICE COIL	CCAW (copper-clad aluminum wire)
FREQUENCY RESPONSE	20 - 20,000 Hz
MAXIMUM INPUT POWER	1,600 mW at 1 kHz
SENSITIVITY	100 dB
IMPEDANCE	65 ohms
CABLE	3.4 m (11'), OFC litz wire, left-side exit
CONNECTOR	3.5 mm (1/8") gold-plated stereo mini-plug
ACCESSORIES INCLUDED	Screw-on 6.3 mm (1/4") adapter, protective pouch

† Specifications are subject to change without notice.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>