


AudioSource **SW Five**

Remote Controlled
Powered Subwoofer with
Active Stereo Crossover and
High Intensity Video Shielding

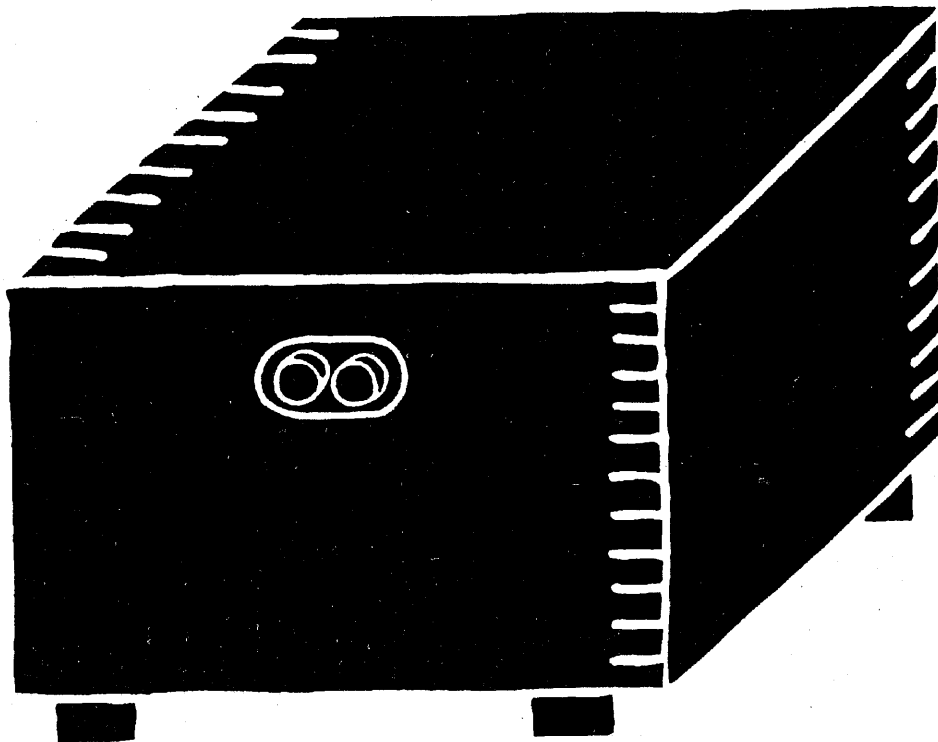

Congratulations on your new purchase, and welcome to the AudioSource family of satisfied customers. We trust that you will continue to enjoy the value and quality of your AudioSource SW Five Powered Subwoofer. In order to make sure that you are experiencing the best performance out of your unit, please take a few moments to read this manual before you get started. Also, be sure to retain this manual should you need to refer to it in the future.

<p>WARNING: To reduce the risk of fire or electric shock, do not expose this appliance to rain or moisture.</p>	<div data-bbox="862 92 1013 222"></div> <p>The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user of the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electrical shock to persons.</p> <div data-bbox="862 285 1013 415"></div> <p>The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.</p>
<div data-bbox="193 275 305 380"></div> <div data-bbox="326 254 675 380" style="border: 1px solid black; padding: 5px; text-align: center;"> <p>CAUTION: RISK OF ELECTRICAL SHOCK DO NOT OPEN</p> </div> <div data-bbox="699 275 812 380"></div>	<p>WARNING: TO PREVENT ELECTRIC SHOCK DO NOT USE THIS (POLARIZED) PLUG WITH AN EXTENSION CORD, RECEPTACLE OR OTHER OUTLETS UNLESS THE BLADES CAN BE FULLY INSERTED TO PREVENT BLADE EXPOSURE.</p>
<p>CAUTION: To reduce the risk of electric shock, do not remove cover (or back); no user-servicable parts inside. Refer servicing to qualified service personnel.</p>	

Safety Instructions

Read Instructions - All the safety and operating instructions should be read before the appliance is operated.

Retain Instructions - The safety and operating instructions should be adhered to.

Heed Warnings - All warnings on the appliance and in the operating instructions should be adhered to.

Follow Instructions - All operating and use instructions should be followed.

Water and Moisture - The appliance should not be used near water. For example, near a bathtub, washbowl, kitchen sink, laundry tub, in a wet basement, or near a swimming pool, etc.

Ventilation - The appliance should be situated so that its location or position does not interfere with its proper ventilation. For example, the appliance should not be situated on a bed, sofa, rug, or similar surface that may block the ventilation openings; or, placed in a built-in situation, such as a bookcase or cabinet that may impede the flow of air through the ventilation openings.

Heat - The appliance should be situated away from heat sources such as radiators, heat registers, stoves, or other appliances (including amplifiers) that produce heat.

Power Sources - The appliance should be connected to a power supply only of the type described in the operating instructions or as marked on the appliance.

Grounding or Polarization - Precautions should be taken so that the grounding or polarization means of an appliance is not defeated.

Power-Cord Protection - Power supply cords should be routed so that they are not likely to be walked on or pinched by items placed on or against them, paying particular attention to

cords at plugs, convenience receptacles, and the point where they exit from the appliance.

Cleaning - The appliance should be cleaned only as recommended by the manufacturer.

Power Lines - An outdoor antenna should be located away from power lines.

Non-use Periods - The power cord of the appliance should be unplugged from the outlet when left unused for a long period of time.

Object and Liquid Entry - Care should be taken so that objects do not fall and liquids are not spilled into the enclosure through openings.

Damage Requiring Service - The appliance should be serviced by qualified service personnel when:

- A) The power supply cord or the plug has been damaged; or
- B) Objects have fallen, or liquid has been spilled into the appliance; or
- C) The appliance has been exposed to rain; or
- D) The appliance does not appear to operate normally or exhibits a marked change in performance; or
- E) The appliance has been dropped, or the enclosure damaged.

Servicing - The user should not attempt to service the appliance beyond that described in the operating instructions. All other servicing should be referred to qualified service personnel.

Product Servicing - In the event your SW Five fails to operate properly, please contact AudioSource directly for further assistance, repair, service, or replacement. Please see back cover for address and telephone number.

SW Five Overview

The AudioSource SW Five represents the state of the art in self-powered subwoofer systems. The highly efficient ported enclosure houses a rugged twelve inch, dual voice coil driver, plus a powerful one hundred and fifty watt amplifier, all teamed up with an integral stereo crossover network. Remote control of subwoofer volume and crossover frequency is our latest refinement. This precision matched combination ensures that the SW Five will deliver the best sound possible, under even the most demanding conditions. The advanced floor-firing design disperses the sound evenly throughout the listening area. Crossover frequency, as well as input level, are both variable over a wide range, allowing the SW Five to complement a variety of applications. Line level and hi level inputs and outputs are provided for fast and easy connection to virtually any system. The three-way Auto Power and the Phase Reverse functions complete the list of professional features offered by the SW Five.

A Few Words About Subwoofers



Subwoofers are designed to introduce extended bass response to your system, beyond what traditional speakers alone can offer. The subwoofer is used in conjunction with, not in place of, your existing speakers. It is not necessary to have a pair of Subwoofers. The low frequency sounds created by the Subwoofer will radiate equally into your listening area. A single Subwoofer can dramatically enhance a simple TV, a stereo system, or a full fledged Home Theater System.

The advent of digital recording has increased the amount of low bass information that can be accurately recorded. A subwoofer can reproduce this low bass information. On the Home Theater front, many video tapes and movies are recorded featuring low frequency information well below the "musical" range of traditional loudspeakers. However, this information can be vital to the impact, ambience, and believability of a scene. Again, a subwoofer can faithfully restore those elements to your Home Theater listening experience.

Some System Guidelines

In setting up your Subwoofer, keep in mind a few rules to assure yourself of the best performance. Placement of the Subwoofer is not crucial. Locating the Subwoofer near a wall or in a corner will increase the bass response of the speaker. The sound waves coming from the SW Five are long, and need room to propagate. A Subwoofer placed too close to the listener will not sound as full as one placed a few feet further away. The Level of the SW Five is best set while listening to all the speakers. By itself, the sound of the SW Five is hard to distinguish.

The cabinet of the SW Five is designed to blend in with most decors. It can also be easily hidden under an end table or coffee table, behind a sofa or near the corner. If you decide to place anything directly on the SW Five, use great caution as the speaker cabinet will vibrate and items placed on top may shake loose or fall.

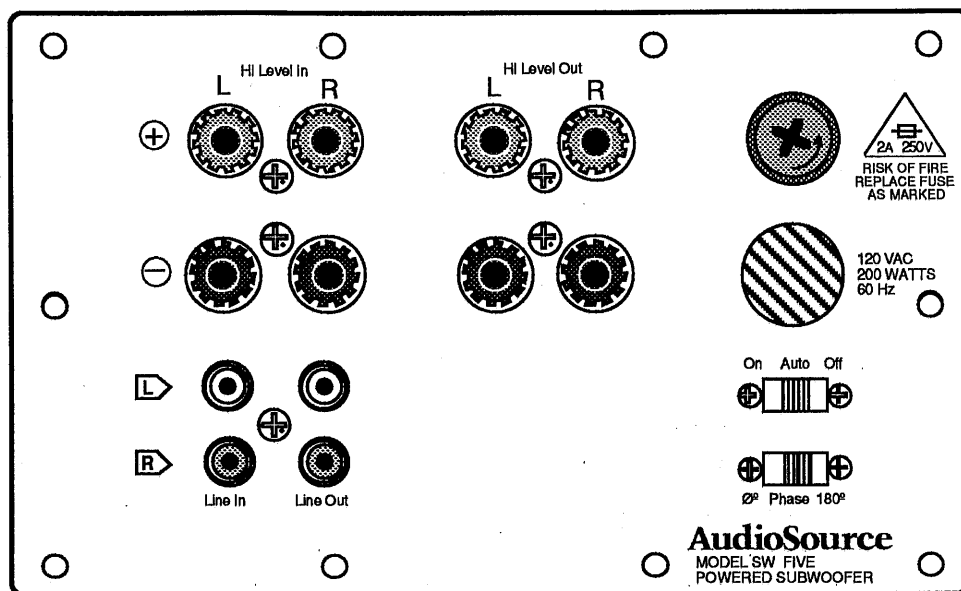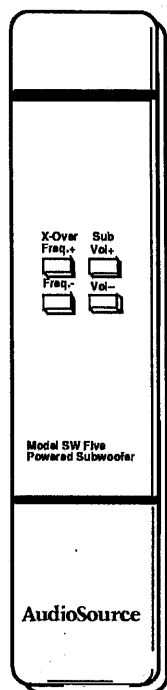

Using the Controls

Power:

The power control has three positions: On, Off, and Auto. The Auto position is the normal setting and keeps the subwoofer amplifier in a standby mode. Using sophisticated signal sensing circuitry, the SW Five amplifier is instantaneously activated whenever a signal is detected at either of the inputs. If no signal is detected over a period of minutes, the amplifier switches back to the standby mode. The On and Off positions override this circuit, setting the SW Five permanently On or permanently Off. The red "Power" LED indicates when the SW Five is On.

Phase:



The normal setting for the Phase switch is the 0° position. Because the SW Five is not in the same cabinet or the same location as your other speakers, the sound from the SW Five may arrive at your ears at a slightly different time than the sound from your other speakers - it may arrive "out of phase". In these rare cases, there will be a cancelling effect in the upper bass and lower midrange. The bass sounds will appear somewhat hollow and the level control may seem to have little or no effect. Setting the phase switch to the 180° position will compensate for these effects. Let your ears decide which setting sounds best.

Level:

The SW Five will be playing along with the other speakers in your system. The level control will allow you to balance the volume of the SW Five to blend in with your system. Once this level control is set, it should not require further adjustment. The volume of the signal coming into the SW Five will determine the listening volume. Start with the level control all the way down. Then, with the other speakers playing, use the remote control to slowly increase the level of the SW Five to the desired level. For best results, the level of the SW Five should not overpower the other speakers in the system.

Crossover Frequency:

The crossover acts as an audio prism, separating sounds of different frequencies from each other. The crossover frequency control is used to adjust at what point the crossover will separate the low frequencies being used by the subwoofer from the high frequencies continuing on to the rest of the system. The normal range for this control will be between 80 Hz to 120 Hz. Raising the crossover frequency will increase the range of sounds the SW Five will reproduce. Lowering the crossover frequency will limit the range of frequencies reproduced by the SW Five. Use the remote control to adjust this crossover point. Let your ears decide the most natural blend between the SW Five and the other speakers in the system.

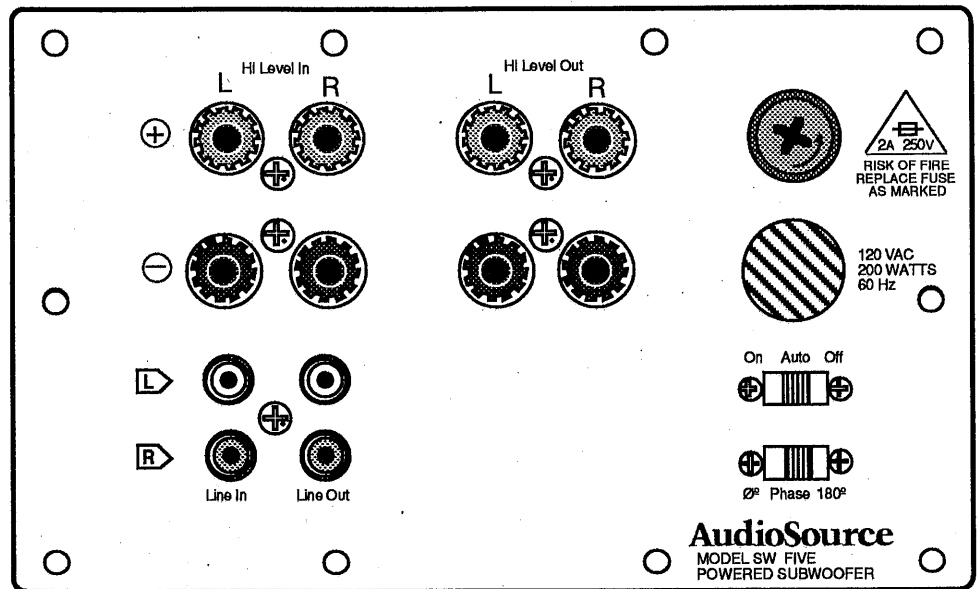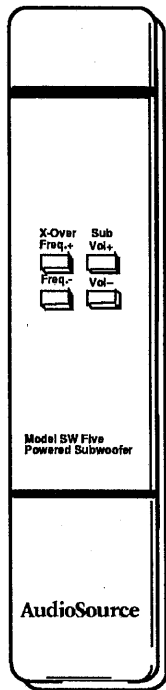

Connecting the SW Five

General Information

The diagrams on the following pages show four of the most common applications of the SW Five, and the associated wiring for each of them. Your specific needs may vary, and the following information will guide you through your hookup requirements.

Each and every sound coming into the SW Five will first pass through the crossover. The portion of the sound below the current crossover frequency setting will continue on through the SW Five, through the level control, into the amplifier, and is finally heard through the speaker. The portion of the incoming sound that is above the current crossover frequency setting is available at the outputs to be returned to the rest of your system, if needed. If you have a choice between different ways to hook up the SW Five to your system, remember that it may be easier to run long distances with speaker wire than with line connectors.

Hi Level In

These inputs are designed to accept an amplified signal from the speaker outputs of a receiver, power amp or other device not equipped with line level outputs.

Hi Level Out


The original amplified signal connected to the hi level Inputs is present at these outputs, minus the frequencies being used by the subwoofer. From here the signal may continue on to the existing Left and Right speakers.

Line In

These "RCA" style jacks are designed to accept a line level signal from a receiver, pre-amp, surround sound decoder, or a similar device. When using a single Line level output from another unit, you may wish to use a "Y" connector to send the signal to both the Left and Right Line Ins on the SW Five. *(Using the Tape Loop of a receiver or pre-amp is not recommended when hooking up the SW Five. Tape jacks typically send a constant level, regardless of the volume setting on the front panel, unlike the Pre-amp outputs. This would affect the balance between the Subwoofer and the rest of the system.)*


Line Out

From these "RCA" style jacks, a Line level signal equal to the original input signal, minus the frequencies being used by the subwoofer, is available. This signal carries the original Left and Right information that is above the current Crossover Frequency setting. From here, this signal may be returned to the power amp inputs of your existing system.

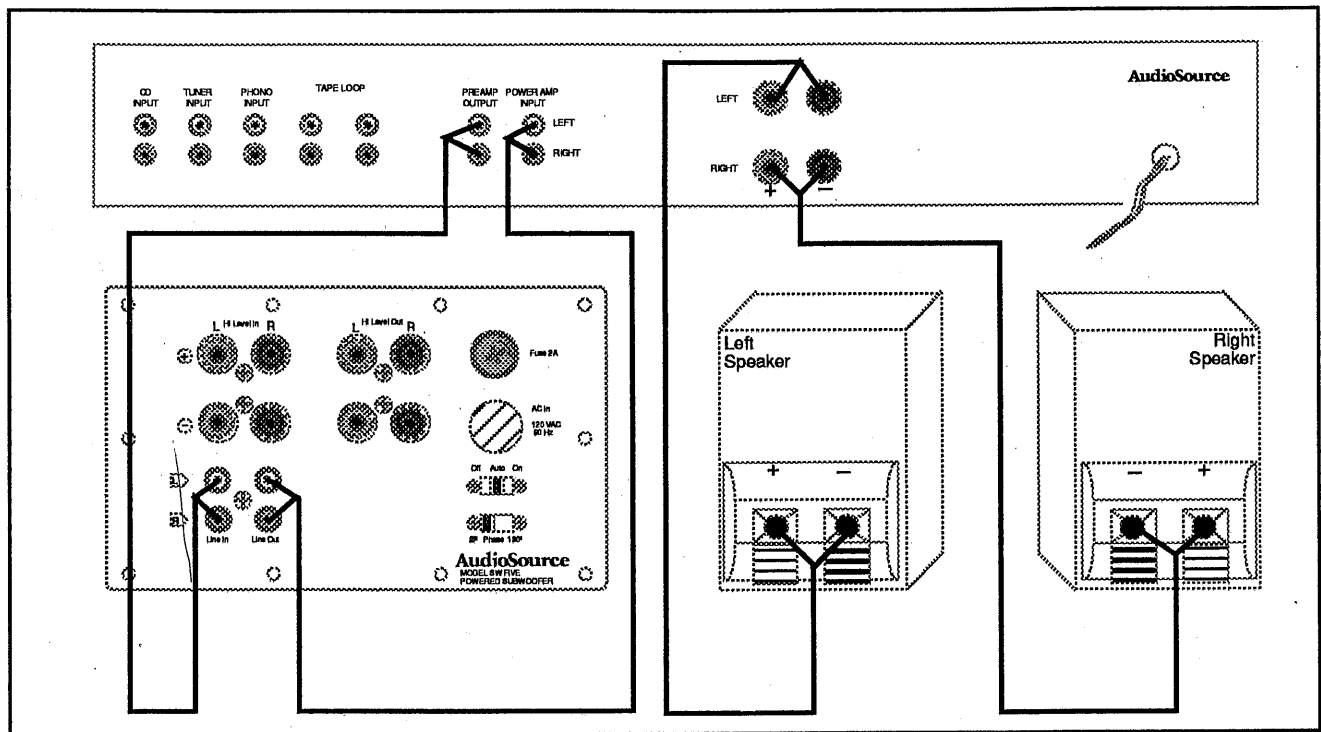


Line Level Connections

In this example, the Pre-Amp outputs of a stereo receiver are connected to the SW Five Line Inputs. The Line Outputs on the SW Five return the Line Level signal (*minus the frequencies used by the subwoofer*) to the Power Amp inputs on the stereo receiver, which in turn powers the Left and Right speakers.

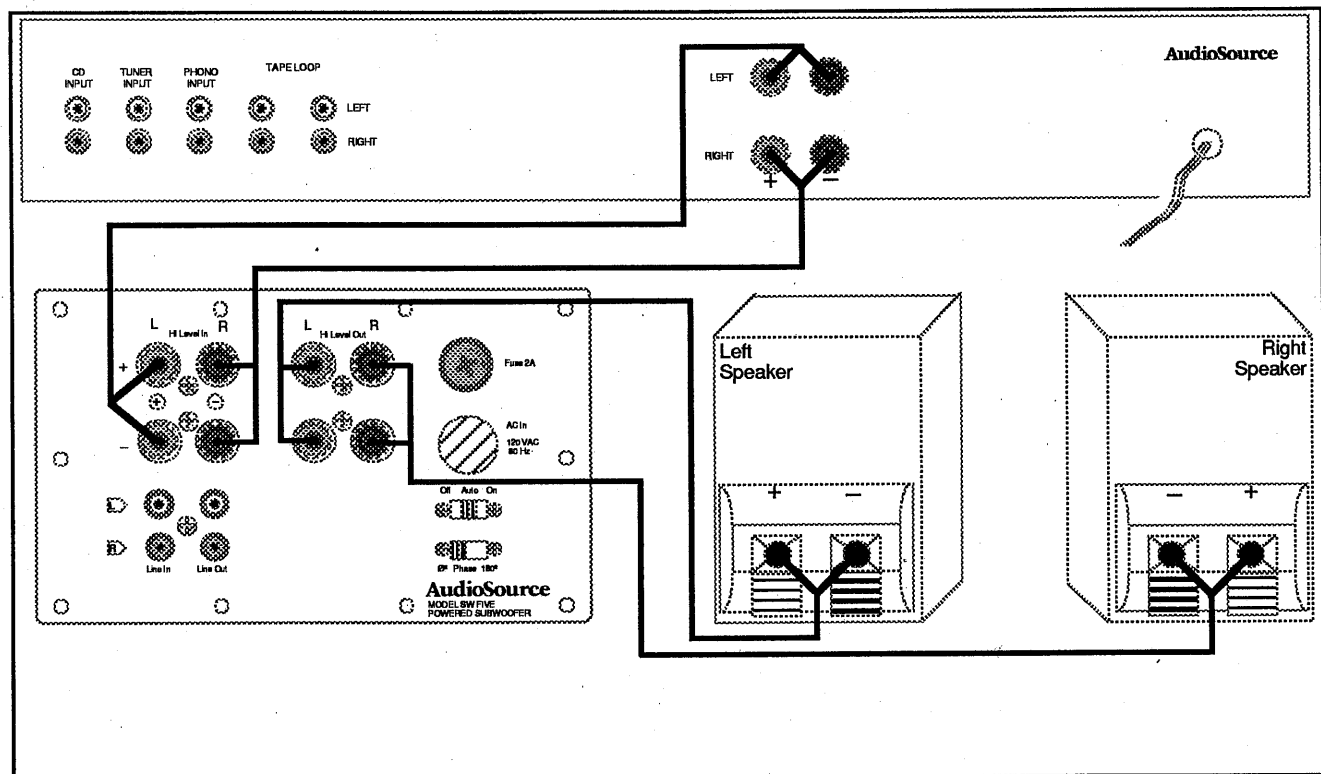


Hi Level Connections

Here the signal is already amplified as it leaves the receiver/amplifier. The Speaker terminals of this unit are connected to the Hi Level Inputs of the SW Five. The Left and Right speakers receive the original amplified signal (*minus the frequencies used by the subwoofer*) from the SW Five Hi Level Outputs.

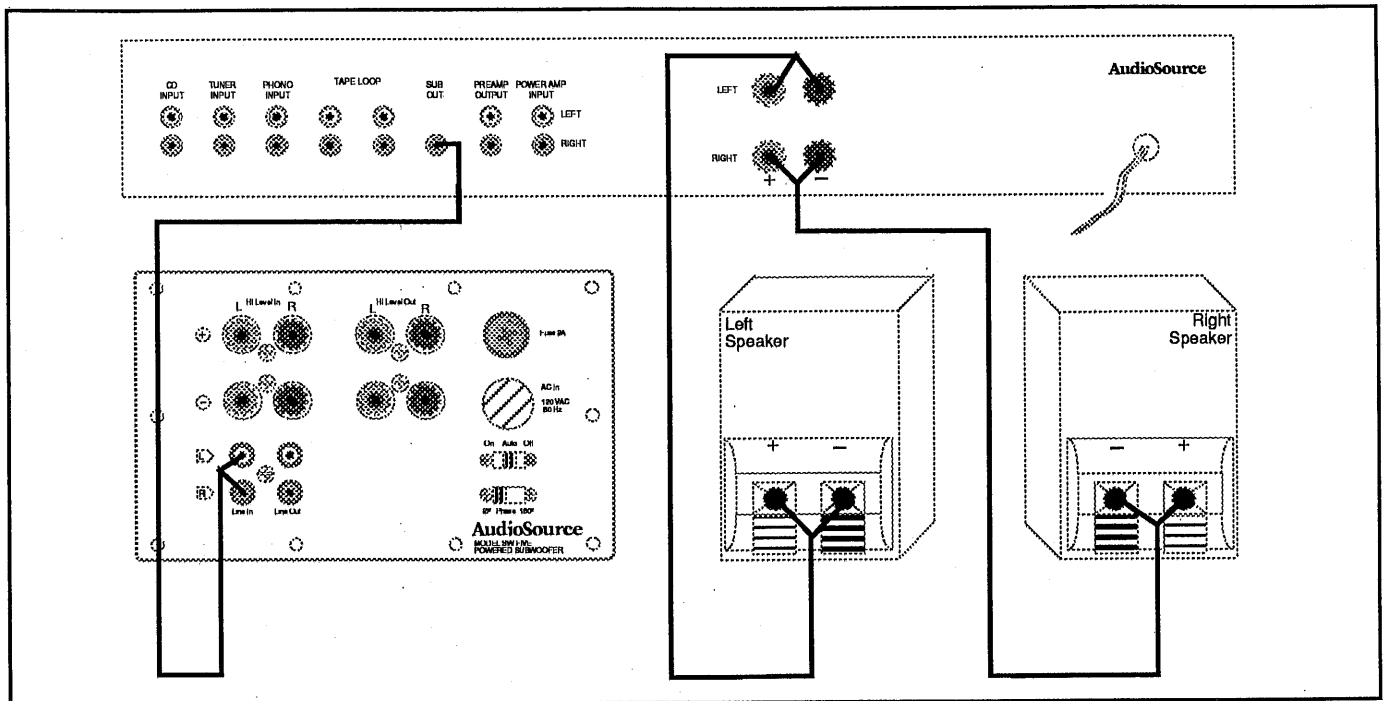

Dedicated Subwoofer Connections

Many surround sound decoders, Home Theater processors and Audio/Video receivers are equipped with a dedicated subwoofer line output. In this case, the signal is already processed and does not need to return to the system or other speakers. Connect this line output to the line inputs of the SW Five. A "Y" connector may be used to feed this single output to both the Left and the Right line inputs.

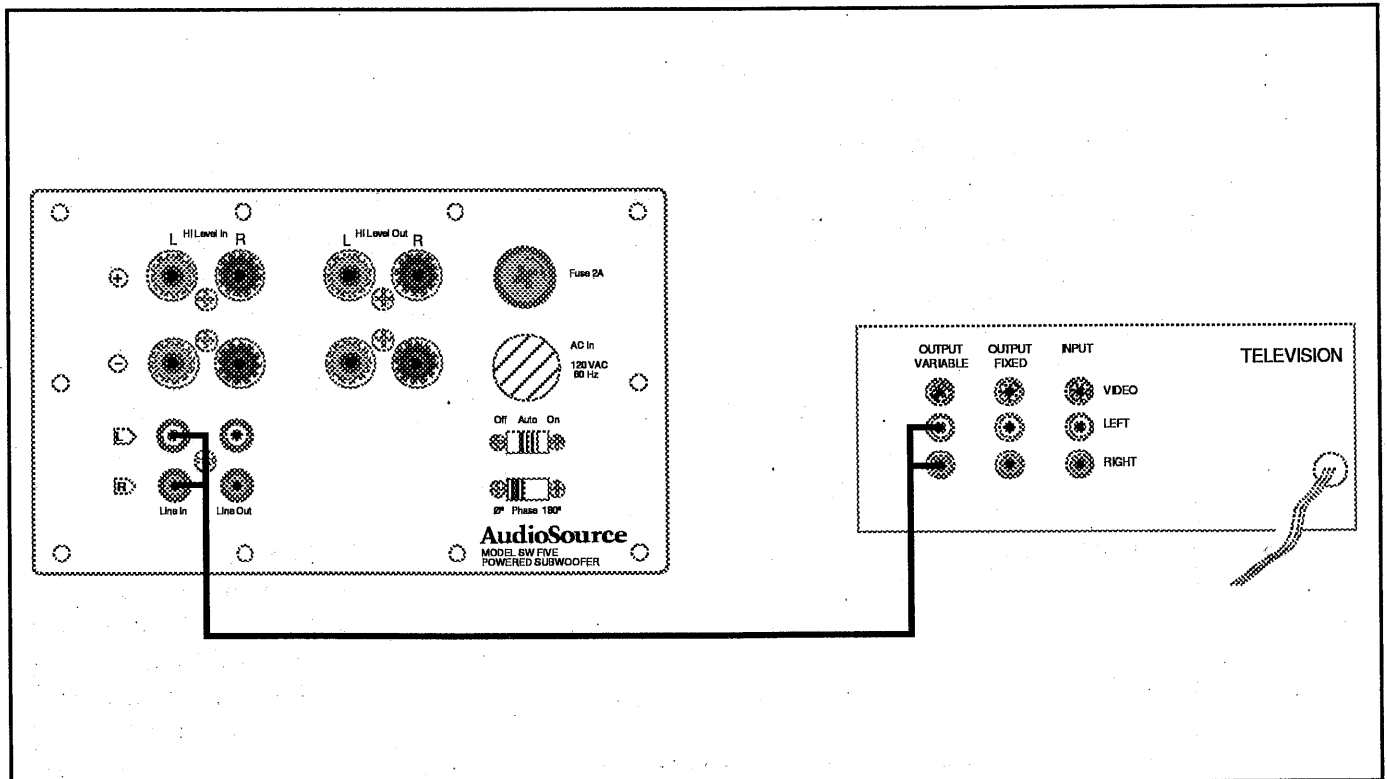

Television Enhancement

Many newer television sets are equipped with "Variable" audio outputs; the signal available at these outputs changes in volume according to how the television volume is set. In this situation, these variable audio outputs can be connected directly to the SW Five line inputs to enhance the bass response of the television's built-in speakers.

SW Five Specifications

Amplifier Power Output	150 Watts RMS
Frequency Response.....	20 Hz to 250 Hz
Signal to Noise Ratio	>90 dB
Driver	12" Dual Voice Coil
Subwoofer Crossover Frequency	40 Hz to 180 Hz
Functions.....	Power (On, Auto, Off) Phase (0°, 180°) Input Level Crossover Frequency
Remote Control.....	Subwoofer level Crossover Frequency
Inputs	Hi Level (Speaker)In Line (RCA) In
Outputs	Hi Level (Speaker) Out Line (RCA) Out

AudioSource®

1327 N. Carolan Avenue
 Burlingame, CA 94010
 (415) 348-8114 FAX (415) 348-8083

Printed in the U.S.A.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>