TLD HB (0.8:1) Lens Kit



Installation Manual

R9842040

BARCO-

Barco nv Presentations

Noordlaan 5, 8520 Kuurne Phone: +32 56.36.82.11 Fax: +32 56.35.86.51

E-mail: presentations.bid@barco.com Visit us at the web: www.barco.com

Barco nv Events

Noordlaan 5, B-8520 Kuurne Phone: +32 56.36.89.70 Fax: +32 56.36.88.24

E-mail: events@barco.com

Visit us at the web: www.barco.com

Printed in Belgium

Copyright ©

All rights reserved. No part of this document may be copied, reproduced or translated. It shall not otherwise be recorded, transmitted or stored in a retrieval system without the prior written consent of Barco.

Changes

Barco provides this manual 'as is' without warranty of any kind, either expressed or implied, including but not limited to the implied warranties or merchantability and fitness for a particular purpose. Barco may make improvements and/or changes to the product(s) and/or the program(s) described in this publication at any time without notice.

This publication could contain technical inaccuracies or typographical errors. Changes are periodically made to the information in this publication; these changes are incorporated in new editions of this publication.

Trademarks

Brand and product names mentioned in this manual may be trademarks, registered trademarks or copyrights of their respective holders. All brand and product names mentioned in this manual serve as comments or examples and are not to be understood as advertising for the products or their manufactures.




TABLE OF CONTENTS

| 1. | TLD |) HB (0.8:1) Lens Kit | 3 |
|-----|-----|------------------------------|---|
| | 1.1 | Kit Contents | : |
| | | Removing the installed lens. | |
| | | Installing the new lens | |
| | 1.4 | Focusing the lens | į |
| | | Lens Formulas. | |
| | 1.6 | Cleaning the lens | 6 |
| | | · · | |
| Inc | 4av | | C |

2 ______ R5976662 TLD HB (0.8:1) LENS KIT 22/12/2004

1. TLD HB (0.8:1) LENS KIT

1.1 Kit Contents

Kit Contents

Contents

- TLD HB (0.8:1) Lens.
- Installation Manual.
- TorayseeTM Cloth.

1.2 Removing the installed lens

What has to be done?

Removing the installed lens on the SLM series projector.

Necessary Tools

No tools necessary.



WARNING: Risk of personal injury. Instructions for lens installation must be followed thoroughly.

How to remove the installed lens?

To remove the lens, follow the next procedure:

- 1. Support the lens with one hand. (image 1-1)
- 2. Move the handle of the lens anchor system to the left. (image 1-2)
- 3. Take the lens unit out of the lens block. (image 1-3)



Image 1-1 Support the lens with one hand



Image 1-2 Move the handle of the lens anchor system to the left



Image 1-3 Take the lens out of the lens block

1.3 Installing the new lens

What has to be done?

This new lens has to be installed on the SLM series projector.

Necessary Tools

No tools necessary.



WARNING: Risk of personal injury. Instructions for lens installation must be followed thoroughly.

How to install the new lens?

- 1. Take the lens assembly out of is packing material and remove the lens caps on both sides.
- 2. Move the handle (A) of the lens anchor system to the right. (image 1-4)

_ R5976662 TLD HB (0.8:1) LENS KIT 22/12/2004

Push the lens in the lens block gap horizontally, until the lens clicks in lens anchor system.
 Caution: For a table mounted projector, hold the projector when pushing the lens into the lens block to avoid sliding off from the table.



Image 1-4 Lens installation

1.4 Focusing the lens

How to focus the lens?

To focus the lens, follow the next procedure:


1. Rotate the lens barrel (limited range!) for picture focusing. (image 1-5)



Image 1-5 Rotate the lens barrel for picture focusing

1.5 Lens Formulas

Lens Formulas

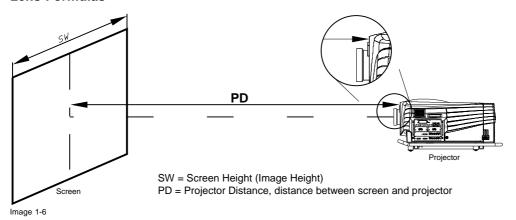

To calculate the distance between the projector front side and the screen (PD) for a given screen width (SW), use the following formula:

| SLM Projector | Formula (in meter) | Formula (in inches) |
|---------------|-----------------------|-----------------------|
| SLM G5 | PD = 0.85 x SW + 0.05 | PD = 0.85 x SW + 1.97 |
| SLM G8 | PD = 0.85 x SW + 0.05 | PD = 0.85 x SW + 1.97 |
| SLM G10 | PD = 0.85 x SW + 0.05 | PD = 0.85 x SW + 1.97 |
| SLM R6 | PD = 0.84 x SW + 0.05 | PD = 0.84 x SW + 1.97 |
| SLM R8 | PD = 0.84 x SW + 0.05 | PD = 0.84 x SW + 1.97 |
| SLM R10 | PD = 0.84 x SW + 0.05 | PD = 0.84 x SW + 1.97 |
| SLM R12+ | PD = 0.77 x SW + 0.05 | PD = 0.77 x SW + 1.97 |

| RLM Projector | Formula (Metric) | Formula (Inch) |
|---------------|-----------------------|-----------------------|
| RLM G5 (*) | PD = 1.06 x SW + 0.07 | PD = 1.06 x SW + 2.76 |
| RLM G5+ (*) | PD = 1.06 x SW + 0.07 | PD = 1.06 x SW + 2.76 |
| RLM H5 (*) | PD = 0.84 x SW + 0.07 | PD = 0.84 x SW + 2.76 |
| RLM R6+ | PD = 0.77 x SW + 0.07 | PD = 0.77 x SW + 2.76 |

^(*) Optical adapter R9832650 is required

1.6 Cleaning the lens



To minimize the possibility of damaging the optical coating or scratching exposed lens surface, we have developed recommendations for cleaning the lens. FIRST, we recommend you try to remove any material from the lens by blowing it off with clean, dry deionized air. DO NOT use any liquid to clean the lenses.

Necessary tools

Toraysee™ cloth (delivered together with the lens kit). Order number: R379058.

How to clean the lens?

Proceed as follow:

- 1. Always wipe lenses with a CLEAN Toraysee™ cloth.
- 2. Always wipe lenses in a single direction.

Warning: Do not wipe back and forwards across the lens surface as this tends to grind dirt into the coating.

_____ R5976662 TLD HB (0.8:1) LENS KIT 22/12/2004

- 3. Do not leave cleaning cloth in either an open room or lab coat pocket, as doing so can contaminate the cloth.
- 4. If smears occur when cleaning lenses, replace the cloth. Smears are the first indication of a dirty cloth.



WARNING: Do not use fabric softener when washing the cleaning cloth or softener sheets when drying the cloth.

Do not use liquid cleaners on the cloth as doing so will contaminate the cloth.



CAUTION: Other lenses can also be cleaned safely with this Toraysee™ cloth.

INDEX

Focusing the lens 5

Installing the new lens 4

K

Kit Contents 3

L

Lens 6

Cleaning 6 Lens Formulas 6

R

Removing the installed lens 3

Т

TLD HB (0.8:1) Lens Kit 3

Revision Sheet

| То: | | | | | | |
|--|--|----------------------|--|--|--|--|
| Barco nv Events/Documentation Noordlaan 5, B-8520 Kuurne Phone: +32 56.36.89.70, Fax: +32 56.36.88.24 E-mail: antoon.dejaegher@barco.com, Web: www.barco.com | | | | | | |
| From: | | | | | | |
| Date: | | | | | | |
| Please correct the f | ollowing points in this documentation (R | 5976662/01): | | | | |
| page | wrong | correct | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com