

# MM327 | Bicycle Handlebar Mount Kit for Magellan®, Mio®, and Navman® GPS



CM032-ST-2  
Bicycle Handlebar Mount



APMM300  
Dual-T Adapter Plate

## Package Contents:

- (1) CM032-ST-2 - Bicycle handlebar mount
- (1) APMM300 - Dual-T pattern adapter plate

## Compatible with:


- Magellan Maestro: 3100, 3140, 3200, 3210, 3220, 3225, 3250, 4000, 4010, 4040, 4050, 4210, 4215, 4200, 4220, 4245, 4250, 4350, 4370, 4700, 5310, and 5340
- Magellan RoadMate: 1200, 1210, 1212, 1215, 1220, 1230, 1340, 1400, 1412, 1430, 1440, 1470, 1475T, 2000, 2200T, 2250T, 300, 3000T, 3050T, 360, 500, 500 Plus, 6000T, 700, 760, 800, and 860T
- Magellan Triton: 1500, 200, 2000, 300, 400, and 500
- Magellan Crossover: GPS 2500T
- Mio Moov: 300, 301, 310, 330, 330 Europe, 360, 370 Europe, 380, 500, and Knight Rider Ed.
- Navman: 550, 550 3D, 570, 590i



**Precaution:** Arkon strongly recommends using a securing strap to provide extra protection for your device. Failure to do so may result in damage to your device. Do not operate portable devices while riding. Arkon Resources, Inc. assumes no liability for safety of bicycle rider or portable device.

## Bicycle Handlebar Mounting


- Step 1. Choose a suitable location on the handlebars of your bicycle in which to mount the pedestal.
- Step 2. Unscrew the wing nut (A) and remove the screw in order to open the notch cover plate (B) so pedestal can be placed around the handlebars.

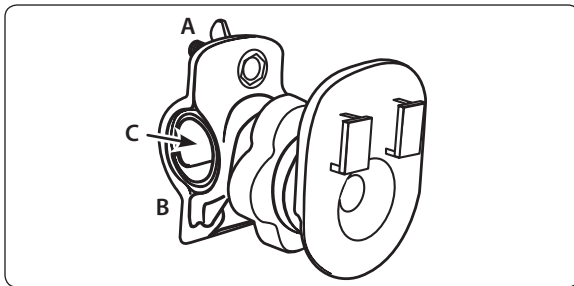

- Step 3. Wrap the rubber rings (C) around the handlebar and re-clip the notch cover plate (B) around the rubber rings. Tighten the assembly by twisting the wing nut (A) until it stops.

## Dual-T Device Attachment

- Step 1. If your Magellan device has dual-T slots on the back, attach the unit to the bicycle mount by connecting the dual T-slots (E) to the dual T-tabs (D) of the mount (D).

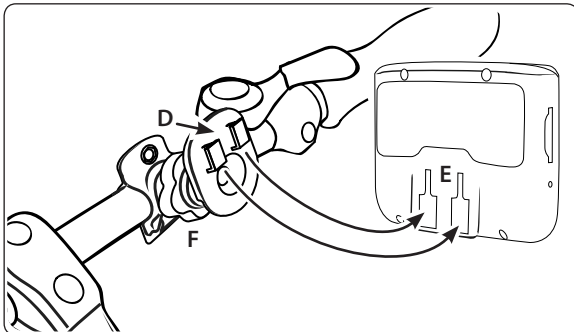


...continued from previous column

- Step 2. Adjust the angle of the mount and cradle as needed, then retighten the swivel tightening knob (F) to firmly secure.


## Connect Adapter Plate to Device

- Step 1. Insert the adapter plate into the vertical groove pattern on the back of the GPS unit (not included, sold separately.)

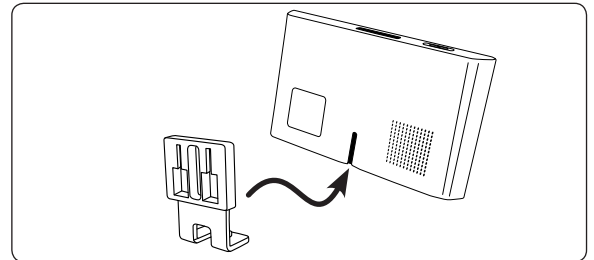

## Connect GPS Device to Bicycle Mount

- Step 1. Connect the dual T-slots (G) on the back of the adapter plate to the dual T-tabs (D) on the bicycle mount.

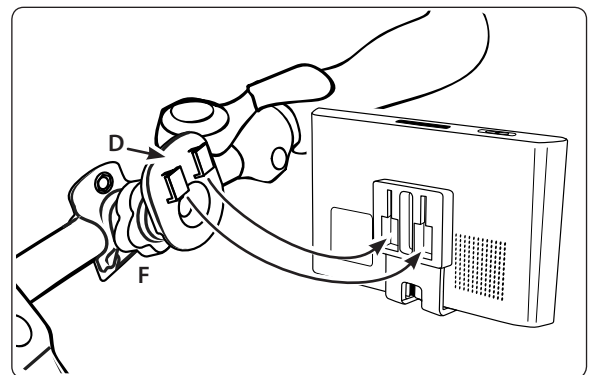

- Step 2. Adjust the angle of the mount and cradle as needed, then retighten the swivel tightening knob (F) to firmly secure.



## Safety Precautions

Do not reposition the pedestal while cycling or driving. Arkon Resources, Inc. does not promote the adjustment of GPS or mobile devices except when the bicycle or vehicle is safely parked or stopped.

Arkon is not responsible for any damages caused to your bicycle, your device, or yourself due to the installation or use of this product.

**ARKON**  
RESOURCES INC.

The Mobile Mounting Specialists™

Consumer Hotline:

USA (800) 841-0884

INT'L (626) 254-9005

Monday - Friday 9 am - 5 pm, PST

[www.arkon.com](http://www.arkon.com)

Arcadia, CA 91006 USA

Designed in USA | Made in Taiwan

© Copyright 2009 Arkon Resources, Inc.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>