




# Multi-Flue

## Commercial/Industrial Water Heaters

Featuring Bock's Legendary **Turboflue**®

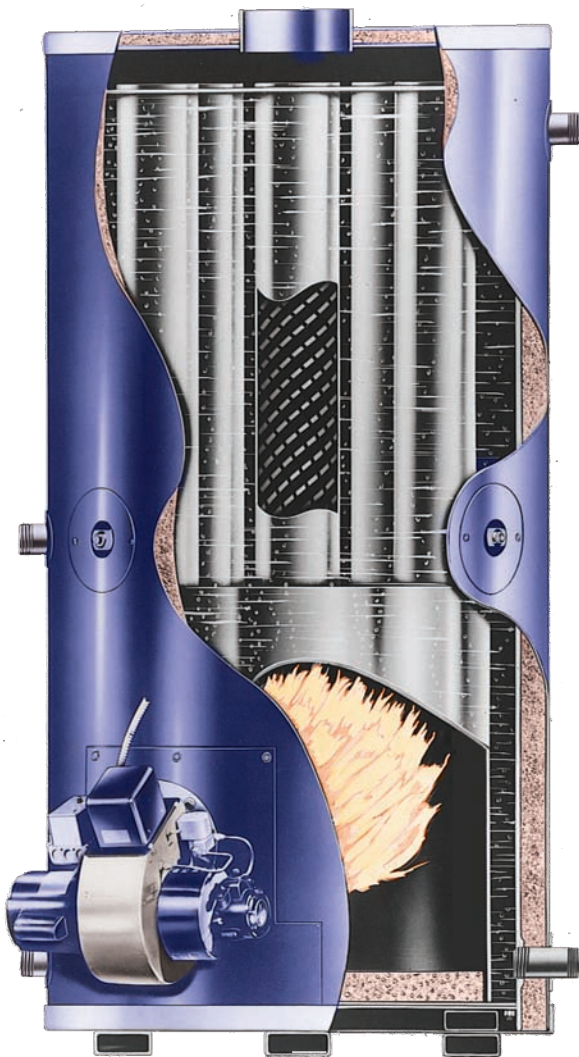

Multiple heat exchangers inside each unit with hundreds of turbofins to boost heat transfer -- heating water **faster** with **less** fuel.




- 166 to 275 Gallon Capacities
- 400,000 to 1,500,000 BTU
- Wet Leg Design - Combustion chamber is surrounded by water on all sides for continuous operation and additional heat transfer
- C<sup>g</sup>lass® Cobalt-enriched Glass-Lined Tank
- Multiple Magnesium Anode Rods (from 4 to 11 by model) to Inhibit Corrosion
- Integrated 2" Steel Skid for Safe and Easy Movement
- Large Handhole Cleanouts are standard
- Power Gas, Oil and Dual Fuel Burners
- ASME construction is available

**3-Year Limited Warranty**



# Multi-Flue

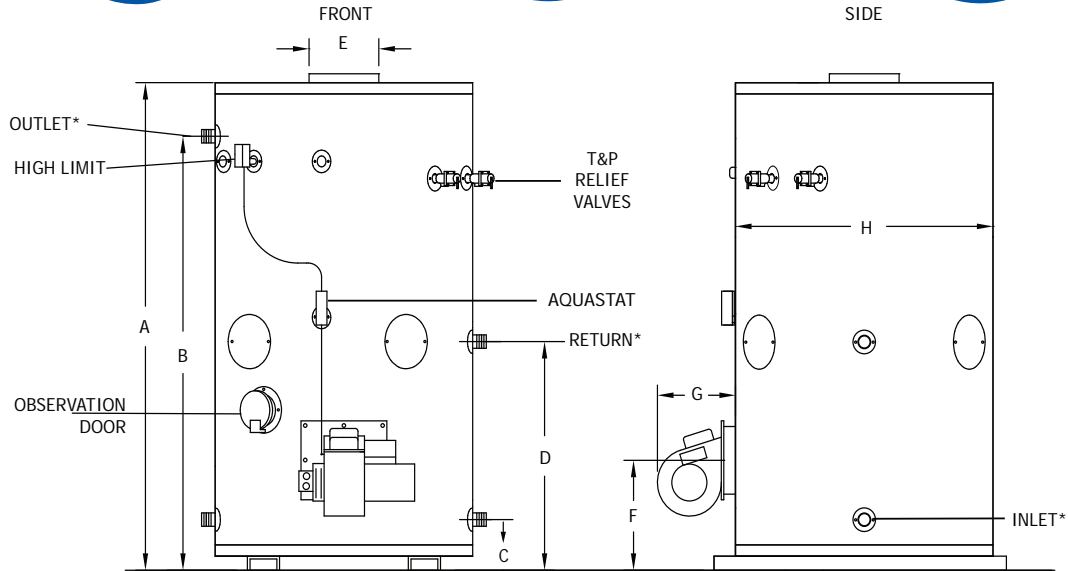

Model	Storage (gal)	Rated Input		Recovery @ Δ 100°F (GPH) Oil/Dual Fuel	Recovery Time @ Δ 100°F (GPH) Oil/Dual Fuel	Recovery @ Δ 100°F (GPH) Power Gas	Recovery Time @ Δ 100°F (GPH) Power Gas	Inlet Pipe Dia.	Outlet Pipe Dia.	Return Pipe Dia.	Dimensions								Shipping Weight (lbs)**			
		BTH/HR	GPH								A	B	C	D	E	F	G Oil	G Power Gas	G Dual Fuel	H	Standard	ASME
150-400	175	400,000	2.8	402	26	393	27	2"	2"	2"	76"	67"	8"	40"	8"	18"	12"	19-3/4"	29-1/2"	40"	2,108	2,283
150-600	166	600,000	4.3	604	17	589	17	2"	2"	2"	76"	67"	8"	40"	8"	18"	12"	19-3/4"	29-1/2"	40"	2,208	2,383
150-800	157	800,000	5.7	805	12	785	12	2"	2"	2"	76"	67"	8"	40"	10"	18"	12"	19-3/4"	29-1/2"	40"	2,308	2,483
200-450	245	450,000	3.2	453	29	442	30	2"	2"	2"	79"	69"	8"	42"	8"	19"	12"	19-3/4"	29-1/2"	44"	2,665	2,840
200-650	212	650,000	4.6	654	19	638	20	2"	2"	2"	79"	69"	8"	42"	8"	19"	12"	19-3/4"	29-1/2"	44"	2,735	2,910
200-850	204	850,000	6.1	855	14	835	15	2"	2"	2"	79"	69"	8"	42"	10"	19"	12"	19-3/4"	29-1/2"	44"	2,815	2,990
200-1150	191	1,150,000	8.2	1157	10	1129	10	2"	2"	2"	79"	69"	8"	42"	12"	19"	14"	19-3/4"	29-1/2"	44"	2,925	3,100
250-800	271	800,000	5.7	808	20	785	21	2"	2"	2"	86"	76"	8"	40"	10"	19"	12"	19-3/4"	29-1/2"	48"	3,516	3,700
250-1000	257	1,000,000	7.1	1017	15	982	16	2"	2"	2"	86"	76"	8"	40"	12"	19"	14"	19-3/4"	29-1/2"	48"	3,606	3,954
250-1250	247	1,250,000	9.0	1253	12	1227	12	2"	2"	2"	86"	76"	8"	40"	14"	19"	14"	19-3/4"	29-1/2"	48"	3,666	3,999
250-1500	247	1,500,000	11.0	1527	10	1473	10	2"	2"	2"	86"	76"	8"	40"	14"	19"	33-3/4"	33-3/4"	33-3/4"	48"	3,726	4,560

\*Nipple not included

\*\*Weight includes burner and controls

NOTE: To specify burner type use "E" for oil, "G" for power gas, and "DF" for dual fuel

T&P Valve: Factory Installed

Drain Valve: Factory Installed Brass Valve

Standard Voltage (all): 120V, 60 Hz, 1P

Pressures (all): Working Pressure, 150 psi; Testing Pressure, 300 psi

Burner Motor does not exceed .75HP

ASHRAE: All Bock Products Meet or Exceed Current ASHRAE Standards.

Warning: Do not install on combustible flooring. Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 31, NFPA 54 or ANSI Z.21.10.1.

Caution: The recommended maximum hot water temperature setting for normal residential use is 120°F. Bock recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.



(on selected models)



[www.bockwaterheaters.com](http://www.bockwaterheaters.com)  
 110 South Dickinson Street, Madison, Wisconsin 53703  
 Toll Free 800.794.2491 • Phone 608.257.2225 • Fax 608.257.5304



80015 Rev 2/08

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>