



Item # \_\_\_\_\_

Project \_\_\_\_\_

Model # CAPO-303

Product Name: Countertop Combination Oven  
5 Half Size Sheet Pan Capacity



## Line Chef™ Countertop Combination Oven



### Specifications:

Countertop Combination Oven. 2.9 cubic feet cooking chamber has capacity for up to 5 full size steam table pans or up to 5 half size sheet pans. Steam & convection: roast, bake, cook & hold or any combination. Digital controls for easy operation. Programmable. Probe. Variable steam Venturi drying system. 10 hour timer or continuous on. All stainless double wall insulated construction. **208-240 volts** - Single phase / 6,000 watts / 30 amps / NEMA L6-30 Plug / 10'6" cord

**Model CAPO-303 - Countertop combination oven provides steam & convection: roast, bake, cook & hold or any combination**



NEMA L6-30 Plug

Our combination ovens are made to Cadco Ltd. specifications by UNOX S.p.A., Italy ♦ NSF, UL through CSA Standards  
Cadco Model CAPO-303 = UNOX Model XAV303

### Standard Features

- **Steam & convection: roast, bake, cook & hold or any combination**
- **2.9 cu. ft. cooking chamber (14-1/2" H x 23" W x 15" D)**
- **Handles 5 full size steam pans\*\* or 5 half size sheet pans (pans not included)** Pan spacing 2-3/4" (\*\* based on 2-1/2" deep steam pans).
- **Five shelves included**
- Compact design maximizes available space
- Digital controls provide easy operation
- Programmable (Memory for 70 programs)
- Variable steam ● Venturi drying system
- Heat settings from 175° - 500° F
- Even heat system ● One fan ● Probe
- 10 hour timer or continuous on
- Cool-touch, easy-clean safety door
- Insulated double wall construction
- All stainless exterior; easy to clean
- Water feed, drain lines, filter and pressure regulator not included with product
- **Water filter required** - Call Cadco for current filter model
- Full one year on-site warranty covering parts and labor **plus** two-year warranty on heating element; 90 day warranty on light bulbs & gasket
- Complete internet or phone technical support for installation of water, electricity, drainage, controls and general start-up
- After-market support system to insure that units are properly serviced.
- Chef Support – on-line and via phone
- 208/240 volts /6,000watts/30 amps/single phase/ NEMA L6-30 plug/10'6" cord
- NSF, UL (through CSA standards)
- Unit must ship by truck, NOT UPS
- Freight class 85

### OPTIONAL ACCESSORIES:

**XR090:** Oven Stand for CAPO-303. 7 tiers for pans

**WPR-2B:** Water Pressure Regulator 2 BAR

**GR1055AO:** Shelf for CAPO-303

**Water Pump** accessory avail. - contact Cadco for details

Model	Color	Electrical			Unit Dimensions	Ship Wt./lbs.	Carton Dimensions	UPC#
		Volts	Watts	Amps				
CAPO-303	Brushed	208-240	6,000	30	w:33", h:28-1/4"~; l:30"	140*	w:36", h:26 1/4", l:32"	654796-51375-8
	Stainless				~24 1/4" without legs	*does not include weight of shipping skid		

For more information, please contact Cadco, Ltd, 145 Colebrook River Road, Winsted, CT 06098  
Tel. (860)738-2500 ♦ Fax (860) 738-9772 ♦ E-mail: info@cadco-ltd.com ♦ Web site: www.cadco-ltd.com

**Due to continual product improvement, specifications and design are subject to change without notice.**

8/28/2006 RV04






Item # \_\_\_\_\_


Project \_\_\_\_\_

Model # CAPO-303


Product Name: Countertop Combination Oven  
5 Half Size Sheet Pan Capacity

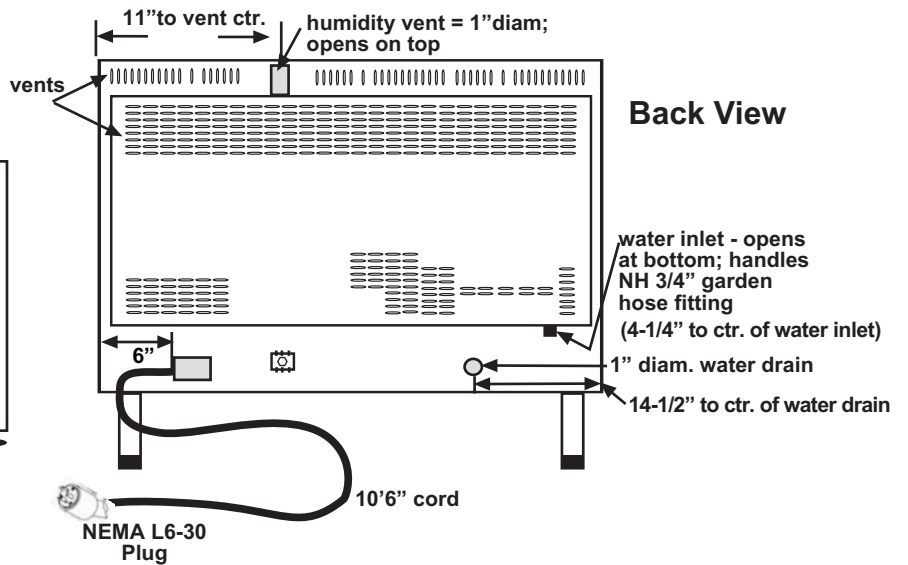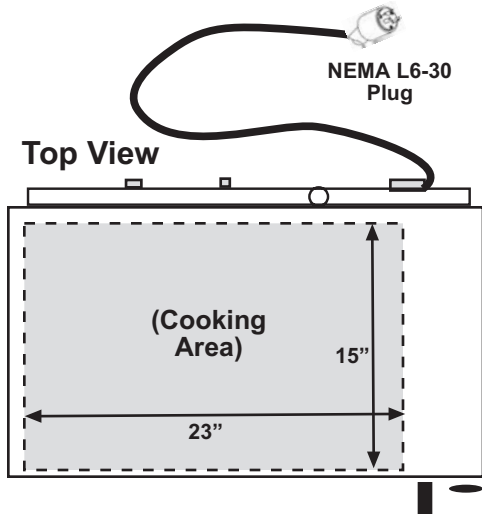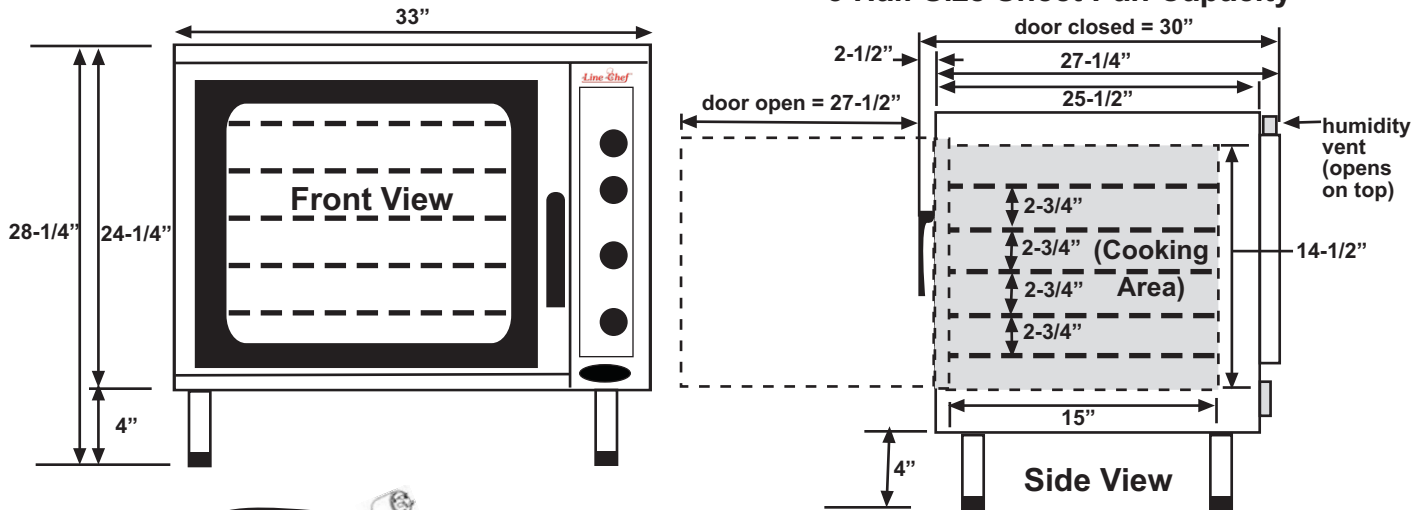

**Steam:** Water is injected directly into the baking chamber, vaporized and changed into steam when touching the hot heating element. Water should be connected to the oven water inlet by a mechanical filter and a cut-off valve. Water must have a hardness between 0.5°-5°F in order to reduce formation of limestone deposits inside the electro-valve and inside the cooking chamber, and a pressure value between 0.5 - 2 bar (7.25 - 29 PSI.)



**Cross corner air flow** -High speed, automatic oscillating reversible fan for even cavity heating.



**Venturi system** - pulls in cool air and pushes out damp air, creating a dry environment.



- CAPO-303 is made to Cadco Ltd. specifications by UNOX S.p.A.
- NSF, UL through CSA Standards (Cadco Model CAPO-303 = UNOX Model XAV303)



- CSA File No. 202281-0-000 (UNOX) / covers Classes 2831-83 (US) and 2831-03 (Canada)
- NSF Listed (UNOX) to ANSI/NSF Standard 4

**Combustible Wall Clearance Required:**

- Sides:** 2"
- Rear:** 4" from back
- Top:** 3"

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>