




Lectern

Model PL-15

1. Detachable gooseneck XLR mic
2. Spacious 15.75" x 21" deck with raised edges to hold materials
3. Input volume with LED lights give visual confirmation of power, signal and reception if using a wireless mic
4. Volume control for mic input
5. Volume control for RCA & 1/4" aux in for connecting with LCD projectors, multimedia players and computers
6. Separate bass, treble and digital volume controls
7. 1/4" and RCA line out to additional speakers
8. Accepts XLR / 1/4" mic inputs
9. 16-channel UHF selectability for wireless mic
10. Unit moves easily on four concealed casters
11. Internal storage compartment 3"d x 12.5"w x 4.75"h
 - Accepts Califone wireless handheld (Q316), hands-free (with M316 transmitter) and wired microphones

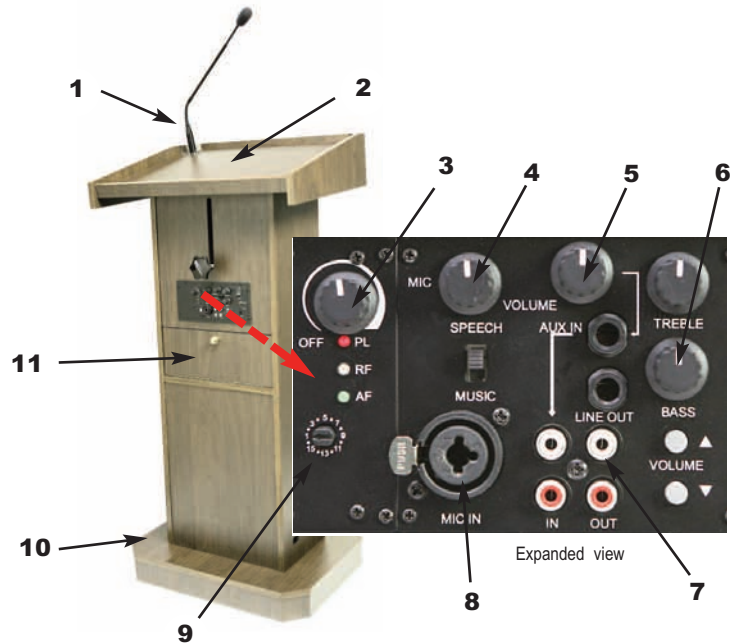

The Califone Lectern delivers portability with confidence for any speech. With its built in hands-free capability (with optional wireless mic) and ease of mobility, the PL-15 will provide years of use.

“Project Intercept”

Please contact us immediately if you experience any difficulties with your Lectern. Our “Project Intercept” customer service program will quickly repair or replace items under warranty. Simply contact us via phone or email warranty@califone.com.

Visit our website at www.califone.com to learn more about the complete line of Califone® audio products including: Wireless public address systems, lecterns, headphones & headsets, wireless microphone systems, group listening centers, multimedia players and computer peripheral products.

We are proud of helping teachers enhance student understanding and achievements since 1947, with your satisfaction as our first priority.

The Califone Lectern carries a limited one warranty and service support available through authorized dealers nationwide. Its warranty covers school use - unlike some other PA products whose warranties would be voided if used in schools.

Distributed by:

Specifications

Rated Power Output:	15 watts RMS, loud enough for up to 200 people
Frequency Response:	60 Hz – 20 kHz ± 3dB
Dispersion Angle:	90° H x 120° V
Speakers:	5.25" high efficiency woofer
Crossover:	L/C – 6dB/Octave @ 4 kHz
Inputs:	Line inputs (2): Hi-Z, RCA (summing L+R) Balanced mic: Hi or lo-Z, with phantom power (+15 volts D.C.) Unbalanced mic: Lo -Z, 1/4"-phone Auxiliary: Hi-Z Mono 1/4"-phone
Line Output:	250mv constant
AC Power Requirements:	110 – 125 VAC, 50/60 Hz or 208 – 240 VAC, 50/60 Hz
UHF Receiver Specifications	
Channels:	16 Selectable
Frequency:	740 - 801.80MHz
Oscillation:	Phase Lock Loop, Synthesized
Modulation:	FM (Frequency Modulation)
Sensitivity:	7 microvolts
Frequency Response:	90 Hz - 17 KHz
Wireless Reception Range:	Approximately 160 ft.
Dynamic Range:	100 dB
Dimensions:	45"H x 22.5"W x 16"D assembled
Shipping Weight:	Box #1 - Body: 42 lbs approx. Box #2 - Top+Base: 30 lbs. approx.
Safety Approvals:	C-UL/CE approved safe for use in school, business, gov't & churches
Warranty	One year from date of purchase

Califone® International Inc. 800-722-0500
www.califone.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>