


5" LCD  
Color Monitor

OWNER'S MANUAL



# clarion VMA5092

## **INTRODUCTION**

The Clarion VMA5092 is a full-featured 5" LCD Color Monitor that can be used as a stand alone monitor, or can be integrated into a mobile multimedia system. The VMA5092 has the following features:

- 5" color LCD panel
- Headrest Mounting Bezel
- 2 Trim Rings for Easy Installation
- RCA Composite Video Input
- Built-in IR Receiver
- Picture Control Button

## **ABOUT THE MANUAL AND WARRANTY**


To start enjoying your new Clarion monitor, please read the instructions listed in this manual. Keep all instructions for future reference. Please fill out and send in the enclosed warranty card to protect your purchase and aid in warranty service. Also, save your original sales receipt as proof of purchase.

## **TABLE OF CONTENTS**

Precautions . . . . .	1
Description . . . . .	2
Package Contents . . . . .	2
Button and Connector Locations . . . . .	2
Wiring Precautions . . . . .	3
Installation . . . . .	3
Mounting Options . . . . .	4
Picture Adjustment . . . . .	4
Care and Maintenance . . . . .	4
Product Specs . . . . .	5
Notes . . . . .	6

## **PRECAUTIONS**

- The set is for use in DC 12V, negative ground vehicles.
- Do not operate the set in ways other than described in this guide. Doing so may damage it and may void your warranty.
- SAFETY FIRST! For rear seat use only. Do not install on dashboard or anywhere else that would permit monitor to be viewed by the driver. Monitor must never be used in any manner that will distract driver or interfere with the driver's safe operation of the motor vehicle.
- Be careful not to run down the car battery while using the set with the car stopped.
- Do not disassemble or modify the set. Doing so may damage it and voids your warranty.
- Keep drinks and drops from umbrellas away from the set. Water may damage the internal circuitry.
- Do not let the set become hot. If temperature in the car is high or the set has been exposed to direct sunlight and is hot, lower the temperature before using it. (The liquid crystal panel will work properly within a temperature range of +5° ~ +40° C.)



## OWNER'S MANUAL

- In extremely cold temperatures, the movement of the picture may be slow and the picture may be dark, but this is not a malfunction. The set will work normally once the temperature increases.
- Small black and shiny dots inside the liquid crystal panel are normal for liquid crystal product.


### **DESCRIPTION**

The VMA5092 is a TFT active matrix color LCD monitor which delivers a striking picture and superior image resolution. The VMA5092 can be used to enjoy video images with the Clarion video sources, even if no TV tuner is connected.

### **PACKAGE CONTENTS**

- 5" monitor
- Headrest Mounting Bezel
- Two Trim Rings
- 5m long cable with 3 male connectors (Video, Power/Ground, 3.5mm IR)
- Hardware (One 1/4-20 with nut and washer)
- 2 Pin Power cable

### **BUTTON AND CONNECTOR LOCATIONS**

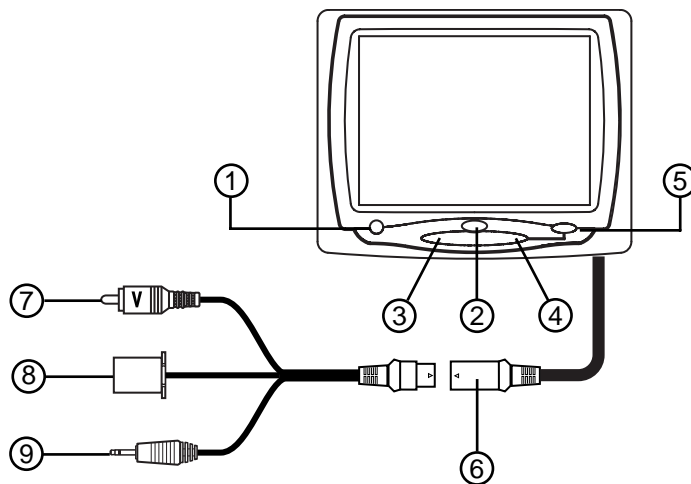

- |                          |                     |
|--------------------------|---------------------|
| ① Power Button           | ⑥ 8 Pin DIN Pigtail |
| ② IR Sensor              | ⑦ Video Input       |
| ③ Picture Select Down    | ⑧ Power Connector   |
| ④ Picture Select Up      | ⑨ IR Remote Out     |
| ⑤ Picture Control Button |                     |

# Clarion VMA5092

## **WIRING PRECAUTIONS**

Read all wiring precautions. If you are not sure of the connections, contact your authorized Clarion dealer.

1. Disconnect the negative (-) lead of the battery before making any power connections.
2. When creating passage holes for the power wires, use grommets to eliminate any sharp edges created during drilling. This will protect the wire from being nicked and causing a short circuit.
3. When connecting the ground lead, fasten the ground lead (black) securely to a clean metal plate on the vehicle.




*NOTE: The VMA5092 monitor displays video images only. It does not provide audio output. Refer to the owner's manual of the connected device for information on audio output.*

## **INSTALLATION**

The VMA5092 is a 5" monitor with an Infrared (IR) eye. It will accept a video signal from any video source with composite video out. The IR eye will work directly with any Clarion video source product with an IR Eye Input.

1. Install Mounting Bezel in vehicle headrest.
2. Once a location has been determined, connect the IR, Video RCAs and power cables to the designated sources.
3. Feed the cables through the mounting location.
4. Plug the cable into the monitor's 8 Pin Din connector. Mount the monitor in the designated mounting bezel.


8 Pin Mini DIN Connector	
1	DC 12V
2	IR Out
3	Ground
4	Video Input
5	A/V Signal Ground
6	NC
7	NC
8	NC

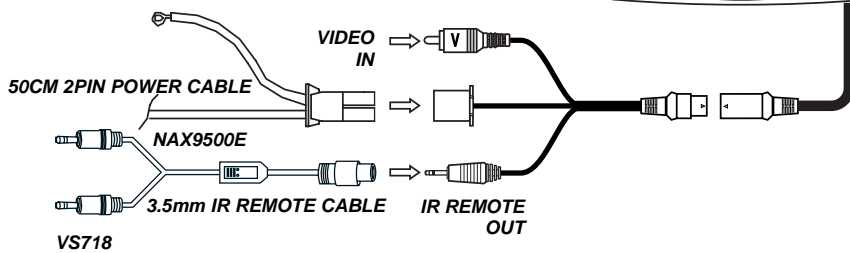

## OWNER'S MANUAL

### **MOUNTING OPTIONS**

Your Clarion VMA5092 monitor comes with a special mounting bezel, perfect for headrest mounting applications. The included trim rings allow the monitor to be installed at various angles to guarantee a perfect install. In addition to this mounting bezel, the VMA5092 has a 1/4-20 threaded hole as well as a slot on the back to accommodate a variety of mounting options.

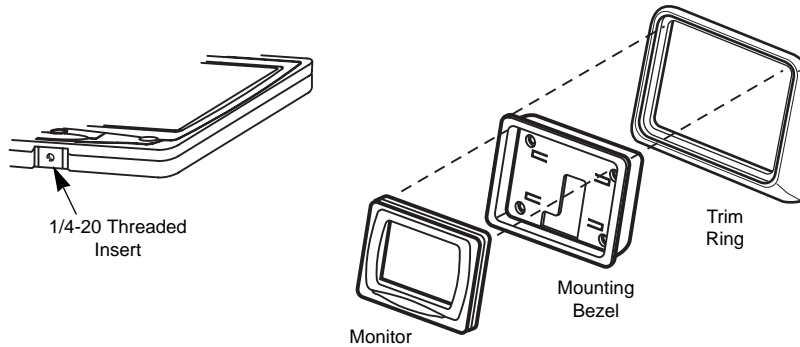

### **PICTURE ADJUSTMENT**

To adjust the picture brightness, contrast, tint, color, etc., use the Picture + and - buttons located on the front panel of the VMA5092. Press the + button to increase the picture brightness, contrast, etc. Press the - button to decrease the picture brightness, contrast, etc.


### **CARE AND MAINTENANCE**

#### **Cleaning the cabinet:**

- Use a soft, dry cloth to gently wipe off any dirt.
- Do not use benzene, thinner, car cleaner, etc., as these substances may damage the cabinet or cause the paint to peel.

#### **Cleaning the LCD panel:**

- Use a soft, dry cloth to gently wipe off any dust.
- The surface is easily scratched; do not rub it with hard objects.



## clarion VMA5092




### **SPECIFICATIONS**


#### **GENERAL SPECIFICATIONS:**

Power Requirement:	DC 12V (9-16V)
Power Consumption:	0.5A Max. (0.5A or Less)
Weight:	1.3lb (0.6kg)
Dimensions:	5.5" x 4.4" x 1.2" (140 x 110.9 x 30 mm) (W x H x D)
Operation Temperature:	+5° ~ +40° C.
Supplied Accessories:	Extension Cable with (male connectors Video Input Power Connector, 3.5mm IR Remote Out), Mounting Bezel, 2 Trim Rings, 1/4-20 Nut and Washer, 50cm 2 pin Power Cable CCE-001 IR Remote Cable NAX 9500E and VS718

#### **MONITOR SPECIFICATIONS:**




Display Type:	Color TFT Active Matrix LCD
Screen Size:	5" screen
Pixels:	600 x 234
Screen Resolution:	140,400 Dots
Video System:	NTSC/PAL








# OWNER'S MANUL


## NOTES:





**Clarion Co., Ltd.**

VMA5092-10 Rev.0 (12/00)





## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>