

8943A

ImagePro 8943H Portable LCD Projector



The ImagePro 8943A is a bright (4000 lumens) and versatile portable LCD projector with network control, and is HDTV ready

8943A FEATURES

- 4000 lumen brightness
- XGA resolution
- Network capability for control, maintenance and security
- Lamp access on top
- Horizontal & vertical lens shift
- Optional bayonet style lenses available
- 4 Built-in 4W speakers with SRS WOW™ technology
- HDTV ready, HDMI input
- Side mounted high-performance filter



Manual Horizontal and Vertical Lens Shift for Perfect Image Alignment

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.

www.dukcorp.com




ConVA by Dukane delivers control of classroom audio visual assets in sync with our Student Response System. Experience tomorrow's classroom today with ConVA. Visit www.convasystems.com.

Call Dukane: 800-676-2485

ImagePro 8943A Portable LCD projector

Back Panel

Connections

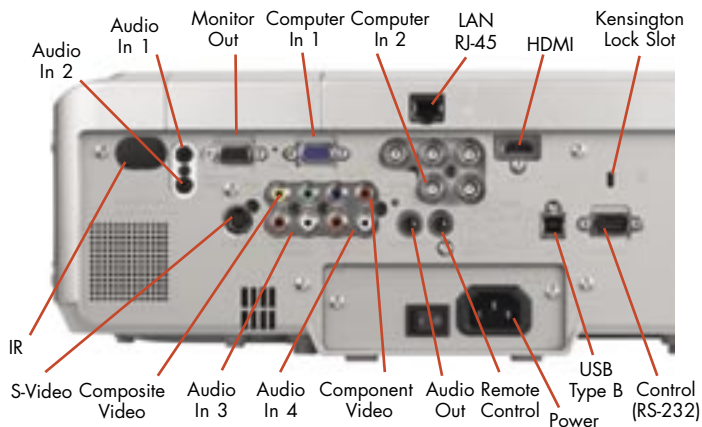

FEATURES

- XGA (1024 x 768) resolution
- 4000 ANSI lumens of brightness
- Network Capability, RJ-45, connection
- Whiteboard & Blackboard Modes
- Easy maintenance in ceiling mount with lamp access on top & filter access on side
- Monitor loopthrough & remote mouse control
- Remote control with "My Buttons"
- Optional bayonet style lenses available
- 4 Built-in 4W speakers with SRS WOW™ technology
- Input source naming
- Horizontal & vertical lens shift
- HDTV ready & progressive scan, HDMI input
- Kensington lock slot & security bar
- Five Year Warranty and One Year Peace of Mind Service

8943A Projection Table

| Image Size 4:3 | | Throw Distance | |
|----------------|--------|----------------|------|
| Diagonal | Width | Min. | Max. |
| Inches | Inches | Feet | Feet |
| 30 | 24 | 2.8 | 3.4 |
| 60 | 48 | 5.8 | 7.0 |
| 80 | 64 | 7.8 | 9.3 |
| 100 | 80 | 9.8 | 11.7 |
| 120 | 96 | 11.7 | 14.1 |
| 150 | 120 | 14.7 | 17.6 |
| 200 | 160 | 19.5 | 23.5 |
| 300 | 240 | 29.3 | 35.3 |

Throw Ratio (distance to width) 1.5 1.8

DUKANE

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
800-676-2485
630-584-5156
avsales@dukcorp.com
www.dukcorp.com/av



toll-free
fax
e-mail

Specifications

| | |
|------------------------|--|
| Image Element | 0.8" polysilicon TFT x3 |
| Brightness | 4000 ANSI lumens, 2300 (whisper mode) |
| Resolution | 1024 x 768 pixels (H X V), XGA |
| Contrast | 1000:1 (using active iris) |
| Scanning Frequency | fh 15-106 kHz, fv 50-120 Hz |
| Lens | Manual zoom (F=1.7 to 2.1), 1.2X. Horizontal & vertical lens shift |
| Lens Throw Ratio | 1.5 -1.8 :1 throw distance to image width |
| Keystone Correction | Digital vertical & horizontal +/-40 deg. & +/- 20 deg. |
| Aspect Ratio | 4:3 native, 16:9 selectable |
| Computer Compatibility | VGA, SVGA, XGA, SXGA, SXGA+ and UXGA Compressed, MAC13", MAC16" |
| Video Compatibility | NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM, HDTV 1080i, 720p, 576i, 480i/p |
| Image Control | Freeze function, electronic magnification and pan |
| Mouse Control | Using USB |
| Projection Modes | Front/rear/ceiling |
| Color Reproduction | 24 bit (16.7 million) |
| Lamp | 275W UHB |
| Lamp Life | 2000 hours (3000 hours Whisper Mode) |
| Audio | 4W x 4 |
| Throw Distance | 35" to 436" |
| Screen Size, diagonal | 30" to 300" |
| Inputs, Video | (1) Component, RCA x 3 (BNC Shared) (1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1 (2) Audio, Stereo, RCA x 2, (L/R) |
| Inputs, Computer | (1) RGB Signal: D-sub, 15 pin (1) HDMI Audio, Stereo mini jack x 2 |
| RGB Analog In | (1) BNC X 5 |
| Outputs Monitor | 15 pin, D-sub |
| Outputs Audio | Audio, Stereo mini jack x 1 |
| Outputs, Control | 9 pin D-sub Connector, RS232 USB type B (remote mouse only) |
| Network | RJ-45 port / 100Base-T |
| Security | Kensington slot, Security bar |
| Fan Level | 35dB, (28dB in whisper mode) |
| Operating Temperature | 41 to 95 deg. F (5-35 deg C) |
| Power | AC 100-120V, AC220-240V 50/60 Hz, 460 watt |
| Size (WxHxD) | 16.5" x 5.5" x 12.6" |
| Weight | 15.6 lbs. |
| Carton Size | 21" x 14" x 19" |
| Shipping Weight | 25 lbs. |
| Accessories Included | Remote control, batteries (AA), power cord, RGB cable, security label, operator/safety manual. |
| Safety | UL60950, C-UL, FCC Part15, Class B, CE, EN60950 |
| Optional Accessories | Lamp 456-8948, Ceiling mount, universal; RPA-U |
| Optional Lenses | FL601 Short fixed, throw Ratio 0.8 SL602 Short 1.7 zoom, throw ratio 1.2 to 2.0 LL603 Long 2.0 zoom, throw ratio 1.9 to 3.9 UL604 Long 1.8 zoom, throw ratio 3.9 to 7.4 |

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>