





## ImagePro 8948 LCD Projector

- 5000 lumen brightness
- XGA resolution & HDTV Ready
- Wireless 802.11 b/g operation
- Network capability, RJ-45
- Computer-less presentation with SD card slot and USB type A
- Lamp access on top & high performance filter on side
- Horizontal & vertical lens shift
- Optional bayonet style lenses available
- 4 Built-in 4W speakers with SRS WOW™ technology

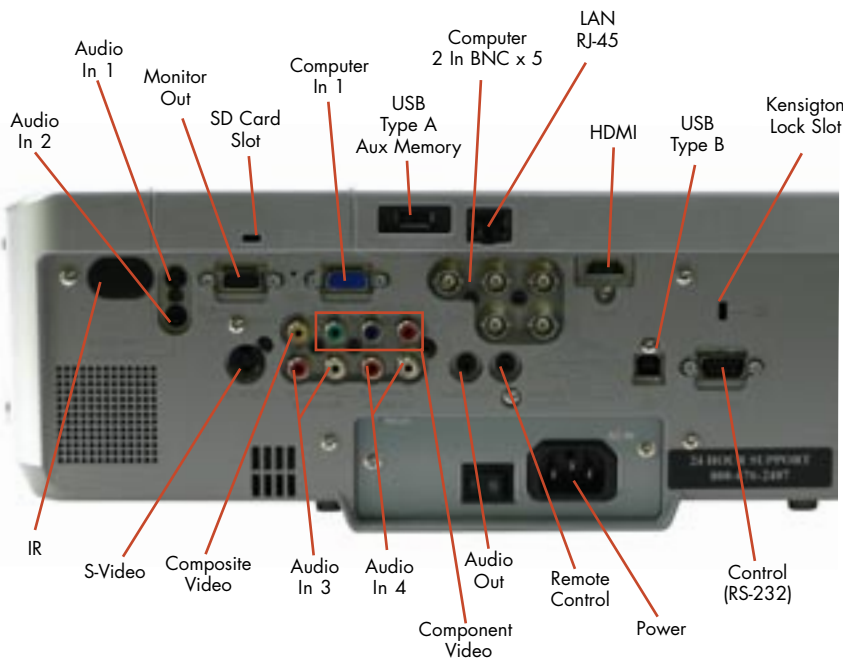

Manual Horizontal  
& Vertical Lens Shift

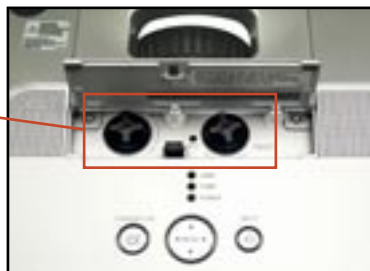

# 8948 DUKANE

# ImagePro 8948 LCD projector

The ImagePro 8948 is a LCD projector that can be used in a variety of applications. With sufficient brightness for classrooms and conference rooms the 8948 is designed to be reliable and easy to maintain.

Computer-less presentations using your SD Card or USB Flash Drive. Wireless operation using 802.11 b/g via an SD receiver. Can connect to 4 PC's wirelessly. Lamp and filter access points are conveniently located and Kensington™ lock slot and our new security bar makes this projector secure and a wise multimedia investment.



## Key features:

- XGA (1024 x 768) resolution
- 5000 ANSI lumens of brightness
- Wireless 802.11 b/g operation
- Network Capability, RJ-45
- Computer-less presentation with SD card slot and USB type A
- New HDMI Input for HDTV
- Easy maintenance in ceiling mount with lamp access on top & filter access on side
- Monitor loopthrough & remote mouse control
- Remote control with "My Buttons"
- Optional bayonet style lenses available
- 4 Built-in 4W speakers with SRS WOW™ technology
- Input source naming
- Horizontal & vertical lens shift
- HDTV ready & progressive scan
- Kensington lock slot & security bar
- Five Year Warranty and One Year Peace of Mind Service

8948 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	2.9	3.5
60	48	5.8	7.1
80	64	8.0	9.6
100	80	10.0	12.0
120	96	12.0	14.5
150	120	15.0	18.1
200	160	20.0	24.3
300	240	30.2	36.4

Throw Ratio (distance to width), 1.5 1.8

# DUKANE

Dukane Corporation  
Audio Visual Products Division  
2900 Dukane Drive  
St. Charles, Illinois 60174  
Toll-free: 800-676-2485  
Fax: 630-584-5156  
avsales@dukcorp.com  
www.dukcorp.com/av



## Specifications

Image Element  
Brightness  
Resolution  
Contrast  
Scanning Frequency  
Lens  
Lens Throw Ratio  
Keystone Correction  
Aspect Ratio  
Computer  
Compatibility  
Video Compatibility  
Image Control  
Mouse Control  
Projection Modes  
Color Reproduction  
Lamp  
Lamp Life  
Audio  
Throw Distance  
Screen Size, diagonal  
Inputs, Video  
Inputs, Computer  
Outputs Monitor  
Outputs Audio  
Outputs, Control  
Network  
Other  
Security  
Wireless  
Fan Level  
Operating Temperature  
Power  
Size (WxHxD)  
Weight  
Carton Size  
Shipping Weight  
Accessories Included  
Safety  
Optional Accessories  
Optional Lenses

## 8948

0.8" polysilicon TFT x3  
5000 ANSI lumens, 2300 (whisper mode)  
1024 x 768 pixels (H X V), XGA  
1000:1  
fh 15-106 kHz, fv 50-120 Hz  
Manual zoom (F=1.7 to 1.9), 1.2X.  
Horizontal & vertical lens shift  
1.5-1.8 :1 throw distance to image width  
Digital vertical & horizontal +/-40 deg.  
4:3 native, 16:9 selectable  
VGA, SVGA, XGA, SXGA, SXGA+ and UXGA Compressed, MAC16"  
NTSC, PAL, PAL-M, PAL-N, SECAM, HDTV 1080i, 720p, 576i, 480i/p  
Freeze function, electronic magnification and pan  
Using USB Type B  
Front/rear/ceiling  
24 bit (16.7 million)  
275W UHB  
2000 hours (3000 hours Whisper Mode)  
4W x 4, WOW Sound  
35" to 510"  
30" to 350"  
(1) Component, RCA x 3  
(1) S-video, Min DIN 4-pin,  
(1) Composite video, RCA x 1  
(2) Audio, Stereo, RCA x 2, (L/R)  
(1) RGB Signal: D-sub, 15 pin, (1) RGB, BNC X 5  
(1) HDMI, (1) Audio, Stereo mini jack 15 pin, D-sub  
Audio, Stereo mini jack x 1  
9 pin D-sub Connector, RS232, USB  
Type B remote mouse only; 3.5mm mini stereo jack (wired remote)  
RJ-45 port / 100Base-T  
SD Card, USB Type A, USB Storage Slot, Shared  
Kensington slot, Security bar  
802.11 b/g with SD card  
35dB, (28dB in whisper mode)  
41 to 95 deg. F (5-35 deg C)  
AC 100-120V, AC220-240V  
50/60 Hz, 460 watt  
16.5" x 5.5" x 12.6"  
15.6 lbs.  
22" x 14" x 9"  
25 lbs.  
Remote control, batteries (AA), power cord, RGB cable, lens cover, operator/safety manual.  
UL60950, C-UL, FCC Part15, Class B, CE, EN60950  
Lamp 456-8943, Ceiling mount, universal; RPA-U, Filter; MU03642  
Short fixed, throw Ratio 0.8  
Short 1.7X zoom, throw ratio 1.2 to 2.0  
Long 2.0X zoom, throw ratio 1.9 to 3.9  
Long 1.8X zoom, throw ratio 3.9 to 7.4

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>