


DURACELL®


Lithium/Manganese Dioxide

2/3A


Li/MnO₂

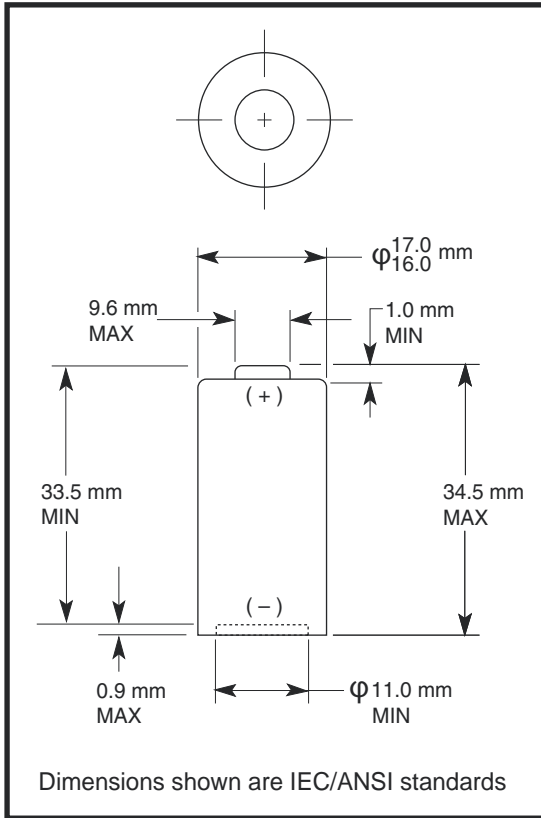

Nominal Voltage:	3.0 V
Typical Voltage:	3.2-3.3 V
Nominal Internal Impedance:	0.25 ohm @ 1kHz
Average Weight:	17.0 gm
Volume:	7.18 cm ³
Terminals:	Flat, Recessed Negative Terminal, Nickel Plated Steel
Operating Temperature Range:	-20°C to 75°C (-4°F to 167°F)
ANSI:	5018LC
IEC:	CR17345

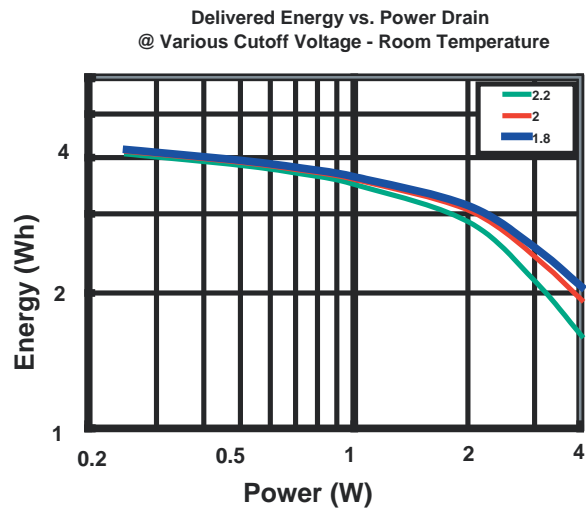

Duracell 2/3A Typical Performance

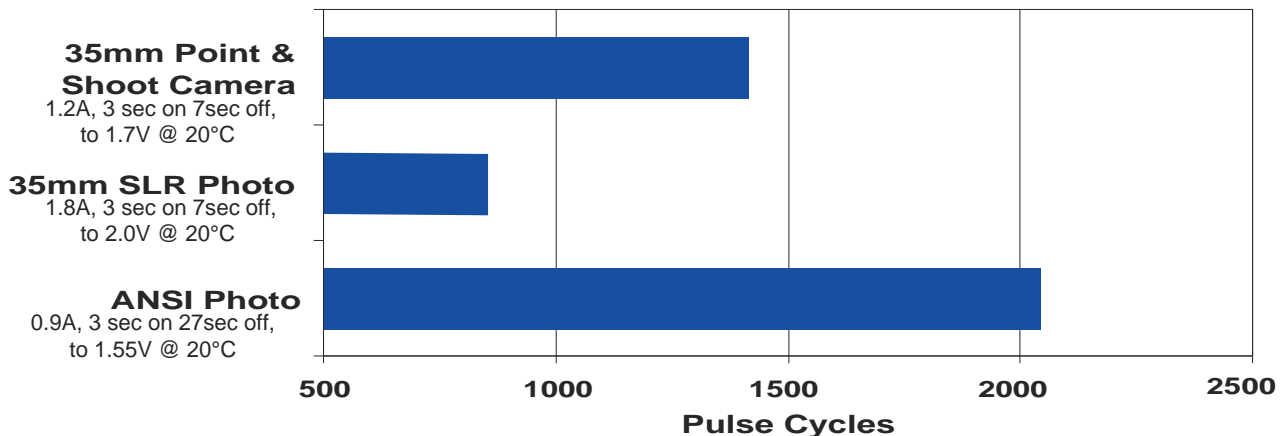

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.


DURACELL®

Lithium/Manganese Dioxide


2/3A

Li/MnO₂


1.8 Amp 3 sec on/ 7 sec off
@ Various Temperatures

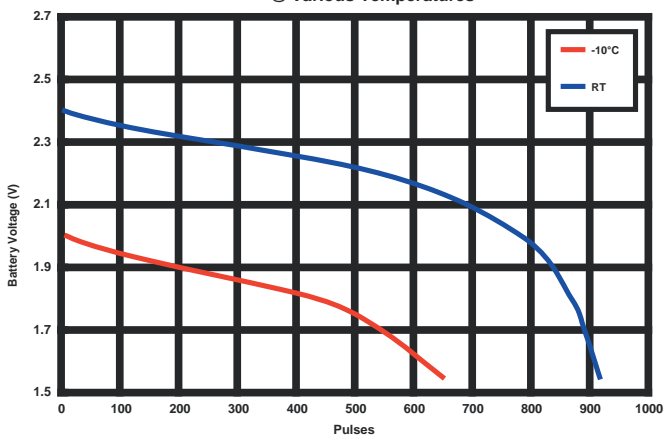


1.2 Amp, 3 sec on/ 7 sec off
@ Various Temperatures

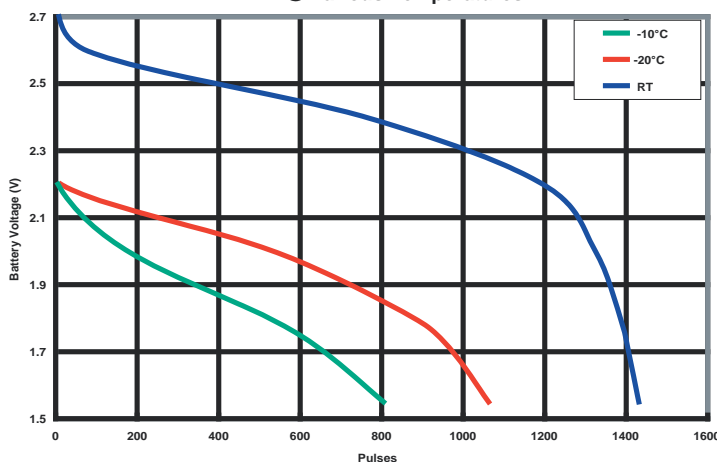

Continuous Discharge
RT to 1.55 Volts

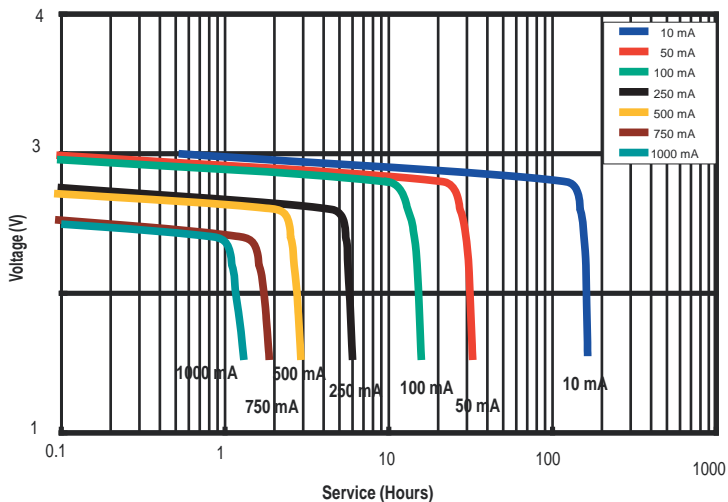

0.9 Amp, 3 sec on/27 sec off
@ Various Temperatures

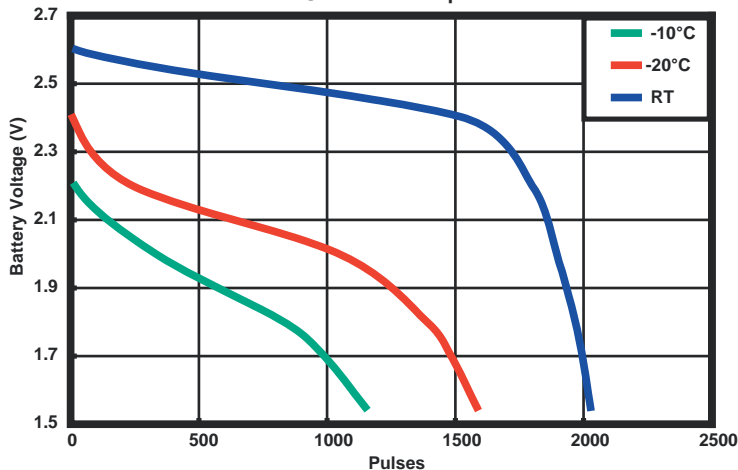

DURACELL®

BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>