



Nominal Voltage:	3.0 V
Typical Voltage:	3.1-3.3 V
Nominal Internal Impedance:	0.5 ohm @ 1kHz
Average Weight:	39 g
Volume:	21.9 cm. <sup>3</sup>
Terminals:	Flat, Recessed Terminal Nickel Plated Steel
Operating Temp. Range:	-20°C to 60°C (-4°F to 140°F)
NEDA/ANSI:	5047
IEC:	TBD

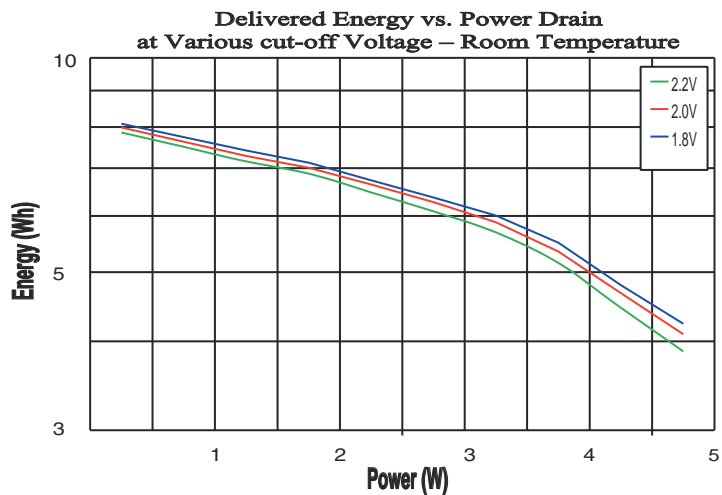


### Duracell Ultra CR-V3 Typical Performance

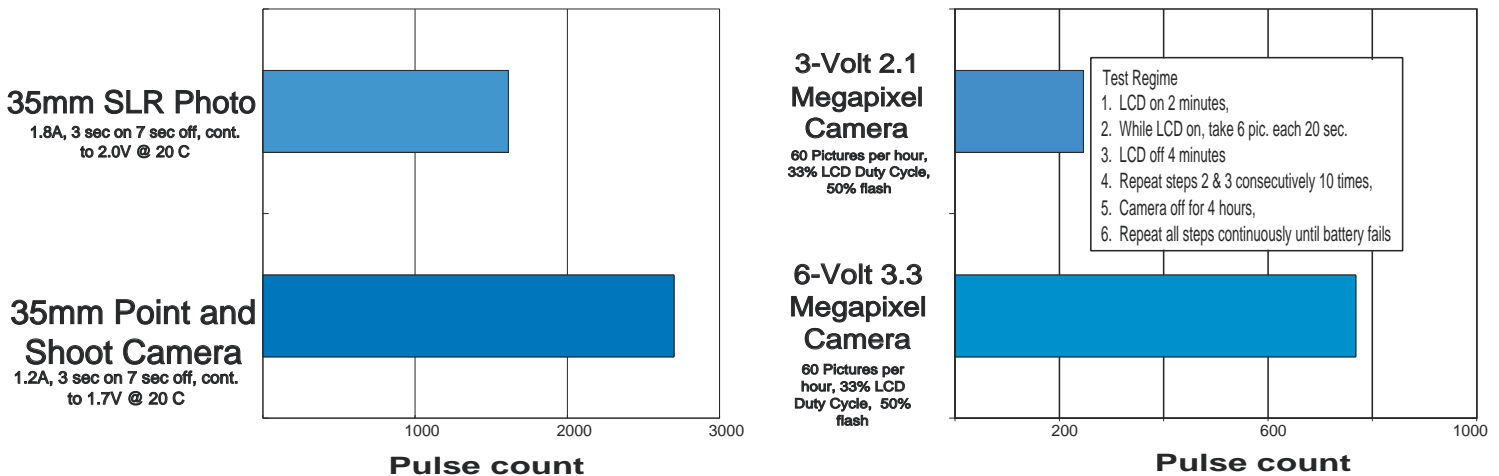


\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.

1.8 Amp, 3 Sec on / 7 sec off at Various Temperatures

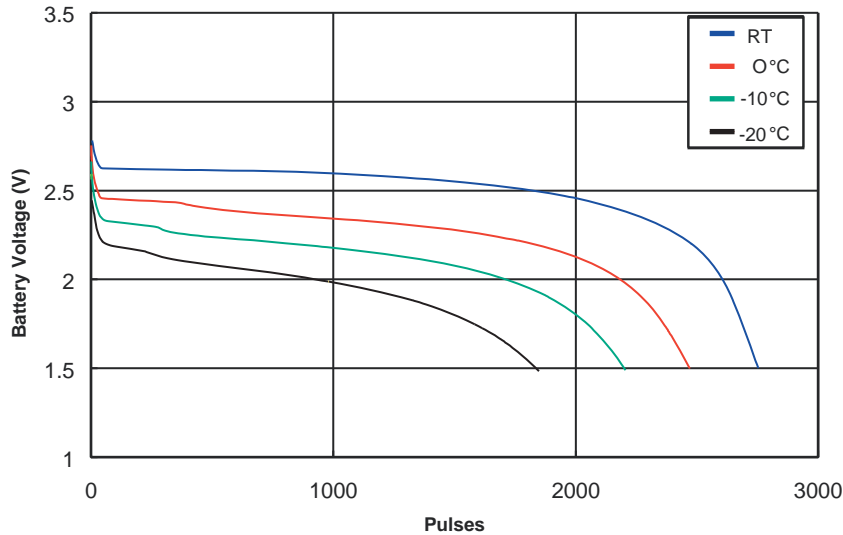

1.2 Amp, 3 Sec On / 7 Sec off at Various Temperatures

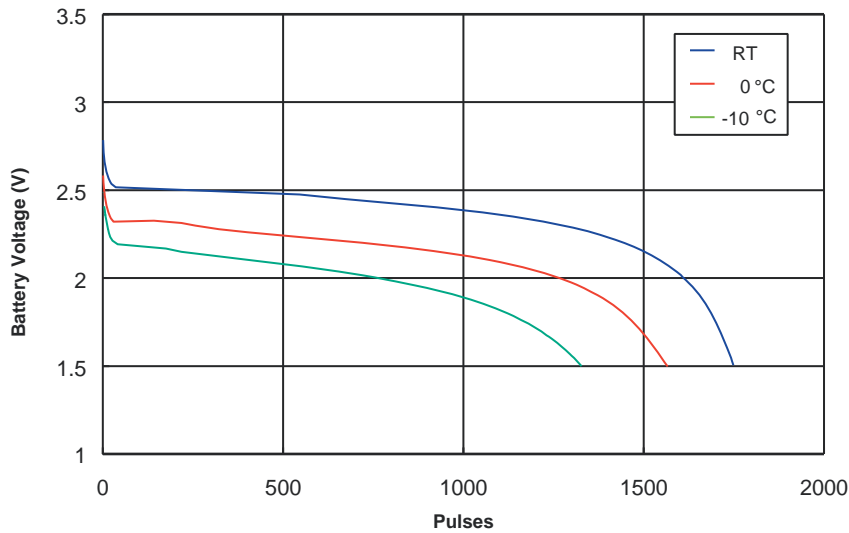

# DURACELL<sup>®</sup>

BATTERIES

Berkshire Corporate Park  
Bethel, CT 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
Internet: [www.duracell.com](http://www.duracell.com)

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>