

COMBOLIGHT® COMBO CLASSIC RECESSED LAMP GROUP 2 - CONFIGURATION "E"

TWO (2) Metal Halide lamp cells - TWO (2) Fluorescent lamp cells
New Construction Recessed Housing - Trim or Trimless

Catalog # _____
Type _____
Project _____

DESCRIPTION:

An adjustable recessed fixture suitable for multiple downlighting applications with one point of electrical entry. Mixes the use of metal halide lamps with fluorescent lamps. Powder coat finish on housing & lamp assembly.

CONSTRUCTION:

Housing, Plaster Frame & Trim Assembly: 18 gauge CRS. J-Box Assembly: 16 gauge CRS (galvanized). Fixture is offered with a .75" ceiling trim or as a trimless fixture. Can accommodate 0.50" to 1.00" ceiling thickness.

LAMP ASSEMBLY:

Two Metal Halide lamp cells with two fluorescent lamp cells. Can accept up to two optical accessories. 380° x 45° locking lamp adjustment. Provides 45° visual cut-off.

SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation


ELECTRICAL:

Fixture is two circuit.
Circuit 1: Integral Aromat® electronic metal halide ballasts for metal halide lamps.

Circuit 2: Integral electronic ballasts for fluorescent lamps.
Lutron® dimming ballasts available upon request.

Junction box is UL listed for through branch wiring, for 8 #12, 90°C supply conductors or 60°C for end of run (access above ceiling not required).

Made in the USA.

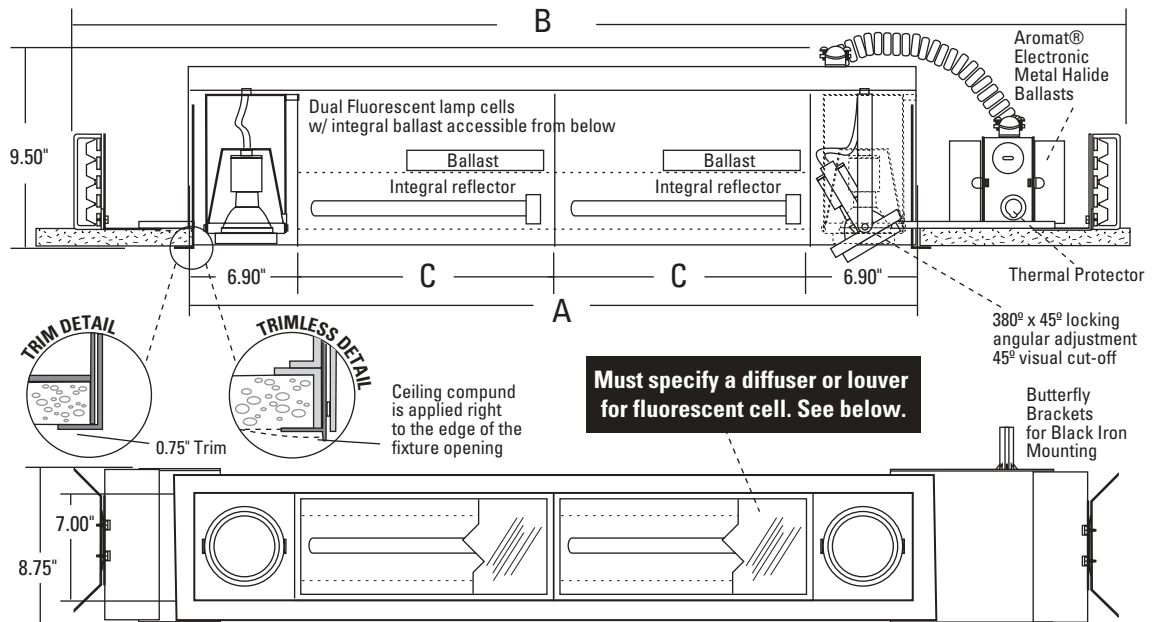

Custom configurations are available with Combo Classic fixtures. Also available with T8 fluorescent lamps. Consult RSA for details



Fluorescent >>	BX40	BX50	PLL80	PLT26	PLT32	PLT42	T528	T535	T5HO39	T5HO54
Lamp Group 2	A 65.18"	65.18"	65.18"	30.18"	31.18"	33.18"	112.18"	136.18"	88.18"	112.18"
Metal Halide	B 81.98"	81.98"	81.98"	46.98"	47.98"	49.98"	128.98"	152.98"	104.48"	128.98"
	C 25.50"	25.50"	25.50"	8.00"	8.50"	9.50"	49.00"	61.00"	37.00"	49.00"

ORDERING EXAMPLE: CR220M39 E BX40 BK WH 120

= Two PAR20 Metal Halide 39W lamps with Two BIAx® 40W Fluorescent • Black Interior • White Trim • 120 volts

Optional Accessories - See RSA Combo Classic accessory page for details.	Fluorescent Diffusers and Louvers - Please specify
Baffle	<input type="checkbox"/> TWD - Textured White Diffuser
Snoots	<input type="checkbox"/> CB1 - 2" Parabolic Louver
Louvers	<input type="checkbox"/> MPD - Conical Prism Diffuser
Lenses	<input type="checkbox"/> CB2 - 1" Parabolic Louver

Item # / Lamp Type	Configuration	Fluorescent Lamp Cell	Interior Finish	Trim Finish	Voltage
Lamp Group 2 Metal Halide	CR220M39 - PAR20MH 39W	BX40 - 40W BIAx®	BK - Black	BK - Black	120 - 120 Volts
	CR230M39 - PAR30MH 39W	BX50 - 50W BIAx®	WH - White	WH - White	277 - 277 Volts
	CR230M70 - PAR30MH 70W	PLL80 - 80W PL-L	S - Silver	S - Silver	
		PLT26 - 26W PL-T	PT - Custom	PT - Custom	
		PLT32 - 32W PL-T		TR - Trimless	
		PLT42 - 42W PL-T			
		T528 - 28W T5			
		T535 - 35W T5			
		T5HO39 - 39W T5HO			
		T5HO54 - 54W T5HO			

T8 lamps also available

SPECIFY -



RSA LIGHTING LLC 9660 - 9700 TOPANGA CANYON BLVD. CHATSWORTH CA. 91311
TOLL FREE: 800-356-3030 • 818-349-3030 • FAX: 818-349-3031 • www.rsalighting.com
©2003 RSA Lighting LLC All Rights Reserved • Specifications subject to change without notice.

Download from Www.Somanuals.com. All Manuals Search And Download.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>