



## **NORDIC CCU0300 SERIES**

UNDER COUNTER CUBED ICE MAKER




### **FEATURES:**

- Produces up to 356 lbs. (162 Kgs.) of ice per day
- 130 lbs. (59 Kgs.) built-in application storage
- Built in Agion Antimicrobial product protection effective against mold, mildew and fungus
- Low profile – only 39" (991 mm) tall and 30" wide (752 mm)
- Available with an air- or water-cooled condenser
- Durable, rotomolded exterior cladding
- Large bin door opening for easy access
- Adjustable leg height

Protected by Agion



(Dimensions Are In Inches)

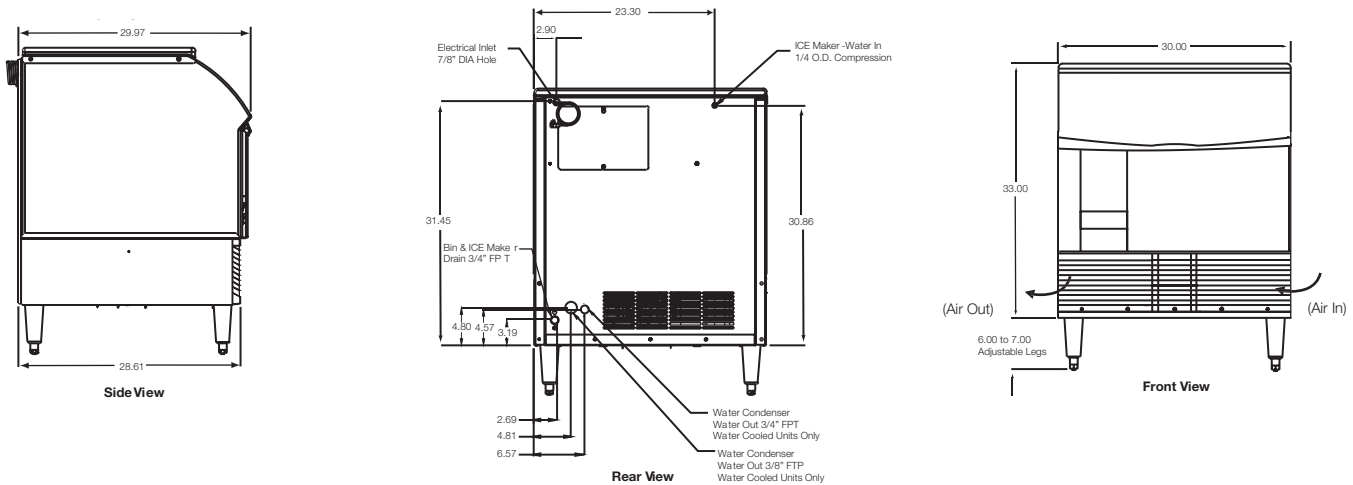


MODEL NO.	Cond. Unit	Ice Prod. per 24 hrs. at 70° Air / 50° Water lbs. (Kgs.)	Ice Prod. per 24 hrs. at 90° Air / 70° Water lbs. (Kgs.)	Water Used-Gals. (Ltrs.) per 100 lbs. of ice 90° Air / 70° Water		Kilowatts Used per 100 lbs. of ice 90° Air / 70° Water	Heat Rejection (Btuh)	Electrical Rating	Min. Circuit Amp.
				Ice Prod. Use	Cond. Use				
CCU0300A*1	Air	309 (140)	228 (104)	32.9 (124)	n/a	8.6	5928	115/60/1	13.1
CCU0300W*1	Water	356 (162)	296 (135)	35.6 (135)	175 (662)	5.7	6097	115/60/1	11.1
CCU0300AF5	Air	241 (110)	223 (101)	30.8 (117)	n/a	7.7	5392	220-240/50/1	6.4
CCU0300WF5	Water	314 (143)	267 (121)	36.3 (137)	145 (548)	6.6	5080	220-240/50/1	4.7

\* Represents cube size. For full cube substitute an "F", for half cube substitute an "H".  
Please note: air-cooled units require 6" (152 mm) front clearance for air intake and exhaust.

1. 90° / 70° figures are rated in accordance with ARI Standard 810.
2. All specifications and performance data are subject to normal manufacturing variances.
3. Application bin storage is 130 lbs. (59 Kgs.) = 90% of Internal Volume x 34 lbs. Per Cubic Foot
4. ARI bin storage is 112 lbs. (51 Kgs.) = 80% of Internal Volume x 30 lbs. Per Cubic Foot

**OPERATING LIMITS**

Ambient Temp. Range Air & Water	50° - 110°F (10° - 43°C)
Water Temp. Range	40° - 100°F (4.5° - 38°C)
Water Pressure Ice Maker Water in	Min. 20 psi (1.4 bar)
	Max. 60 psi (6.9 bar)
Condenser Inlet Water (Water cooled only)	Min. 20 psi (1.4 bar)
	Max. 60 psi (6.9 bar)



Cube Size:	Width	Depth	Height
Full	7/8" (22mm)	7/8" (22mm)	7/8" (22mm)
Half	3/8" (10mm)	7/8" (22mm)	7/8" (22mm)

NUMBER OF WIRES . . . . . 3  
 MAX. FUSE SIZE . . . . . 15  
 SHIPPING WEIGHT LBS (KGS.) . . 205 (93)

AGENCY LISTINGS . . . . . LISTED



IN THE U.S.A.  
 Ph: 800.238.3600  
 Fax: 763.488.4283

OUTSIDE THE U.S.A.  
 Ph: 763.488.8200  
 Fax: 763.488.4283

101 Broadway Street West  
 Osseo, MN 55369  
 www.cornelius.com

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>