


## Kit Includes:




## Installation:

1. Remove the three screws that secure the tail light lens and remove the lens.
2. Remove the light bulb
3. Push and twist to remove the plastic wire socket from the back side of the housing.

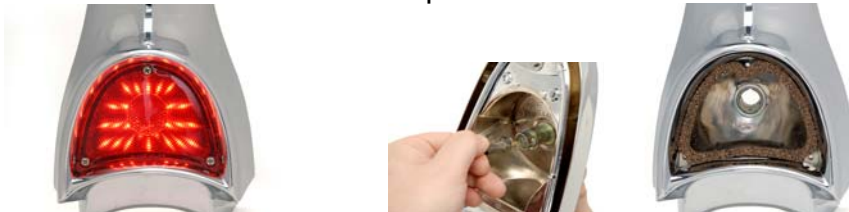

4. Now is a good time to clean the lens and housing. If lenses are in bad shape a new set is recommended.
5. Remove the lock nut and flat plastic back plate from the back of the new LED assembly.

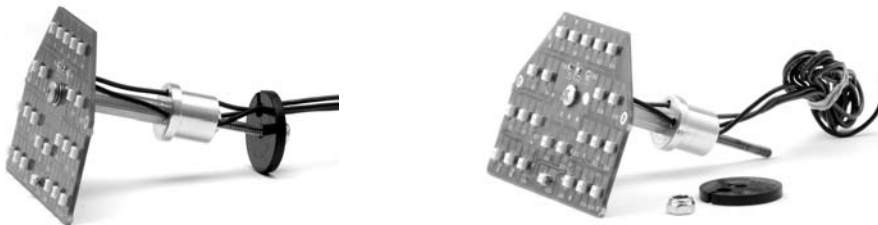

6. Make sure that one wire is still going through each hole in the aluminum spacer. Insert the new LED assembly through the hole where the original bulb and connector were located. Use caution when feeding the wires through to avoid damaging the wire insulation.
7. Guide the wires through the larger hole in the plastic back plate and slide the back plate onto the stud sticking out the back side of the housing.  
**Ensure wires are not pinched to avoid shorting!**
8. Secure the plastic back plate from the back side of the tail light housing with the supplied #6 lock nut.
9. Make sure the original lens gasket is in place and replace the tail light lens. Tighten the screws down carefully.




10. Start by cutting off the existing light socket as it will not be used. Do not strip wires. Trim the wires from LED assembly to appropriate length once mounted, making sure wires are routed cleanly and securely.
11. Use the supplied moisture resistant pigtail connectors\* to attach the wires from the new LED assembly to the existing vehicle harness. Insert appropriate wire from vehicle harness and mating LED assembly wire into a connector and crimp following instructions below.

\*For the best connection, soldering is recommended. But to simplify installation, the supplied connectors will provide a fast weather resistant connection.

**The correct crimp method for the supplied connectors is:**

- 1.) Insert **UNSTRIPPED** wires into the connector and ensure they are all they way in by observing the clear bottom of the connector to see the wires are touching the end.
- 2.) Use pliers to push the blue cap down flush with the edge of the clear body, completing the connection. The connection will only be correct if pressed firmly down with pliers.

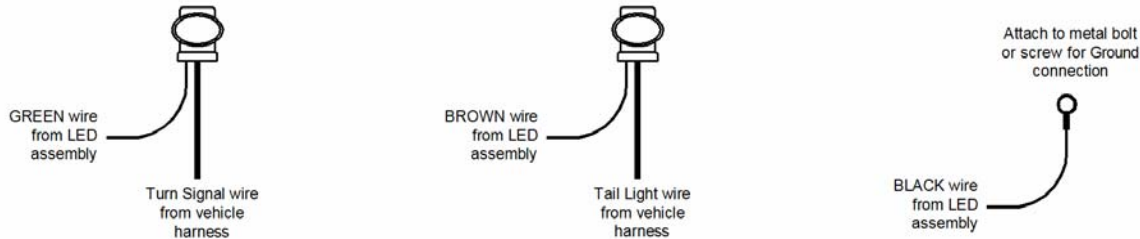

	LED wires	Vehicle harness
<b>Tail light</b>	Brown	Brown or Black
<b>Driver's Turn</b>	Green	Green or Pink
<b>Passenger's Turn</b>	Green	Yellow or Purple
<b>Ground</b>	Black	Chassis or body

12. Repeat for the other side.
13. Test the tail lights, brake lights, and turn signals. If the turn signals do not flash you will need to upgrade your flasher. If you are replacing only the rear turn signals you should be able to use a heavy duty electronic flasher from your local parts store. If you are replacing both front and rear or do not have front bulbs you will need a no-load flasher, Dakota Digital part number LAT-NLF.

**SERVICE AND REPAIR**

DAKOTA DIGITAL offers complete service and repair of its product line. In addition, technical consultation is available to help you work through any questions or problems you may be having installing one of our units. Should you ever need to send the unit back for repairs, please package the product in a good quality box along with plenty of packing material. Ship the product by UPS or insured Parcel Post. Be sure to include a complete description of the problem, your full name and address (street address preferred), and a telephone number where you can be reached during the day. An authorization number for products being returned for repair is needed. We will contact you if any repair charges exist. Any returns for warranty work must include a copy of the dated invoice or bill of sale.

**LED LIGHTING LIMITED LIFETIME WARRANTY**

DAKOTA DIGITAL (the Company) warrants to the ORIGINAL PURCHASER of this LED Lighting product under normal use and condition, be proven defective in material or workmanship DURING THE LIFETIME OF THE CAR IN WHICH IT WAS ORIGINALLY INSTALLED, such defect(s) will be repaired or replaced (at the Company's option) without charge for parts or labor directly related to repairs of the defect(s). To obtain repair or replacement within the terms of this Warranty, the product is to be delivered with proof of warranty coverage (e.g. dated bill of sale), specification of defects, transportation prepaid, to the factory. This Warranty is valid for the original purchaser only and may not be transferred. This warranty does not cover damage to vehicle electrical system. This Warranty does not apply to any product or part thereof which in the opinion of the Company has been damaged through alteration, improper installation, mishandling, misuse, neglect, or accident. This Warranty is in lieu of all other express warranties or liabilities. ANY IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, SHALL BE LIMITED TO THE DURATION OF THIS WRITTEN WARRANTY. ANY ACTION FOR BREACH OF ANY WARRANTY HEREUNDER INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY MUST BE BROUGHT WITHIN A PERIOD OF 30 MONTHS FROM DATE OF ORIGINAL PURCHASE. IN NO CASE SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS OR ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, WHATSOEVER. No person or representative is authorized to assume for the Company any liability other than expressed herein in connection with the sale of this product.

**FOR SERVICE SEND TO: DAKOTA DIGITAL, 4510 W. 61<sup>st</sup> ST N., SIOUX FALLS, SD 57107 USA (800) 852-3228**

Email us at [techsupport@dakotadigital.com](mailto:techsupport@dakotadigital.com)

©Copyright 2007 Dakota Digital Inc.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>