

Shelleyspeed™ by Delfield

SPF-W Freezer Module, 34" height, 35" depth

Project _____

Item _____

Quantity _____

CSI Section 11400

MODELS

- SPF-42W** 42" length, freezer module, 34" height, 35" depth
- SPF-52W** 52" length, freezer module, 34" height, 35" depth
- SPF-66W** 66" length, freezer module, 34" height, 35" depth



SPF-52W



STANDARD FEATURES

- 14-gauge stainless steel top standard
- 34" counter height, 35" depth
- 9' long cord and plug are supplied standard
- 18-gauge stainless steel exterior standard
- Electrical: 120 volt, 60 cycle, single phase
- R404A refrigerant
- Removable sliding lids (two per unit) standard
- Standard on 5" diameter polyurethane swivel casters
- Stainless steel fully retractable interlock provided as standard
- Basket rack system is standard
- A wide selection of laminate colors available at no additional charge
- Laminate selection has 18-gauge galvanized base, 16-gauge coved corner supports to protect laminate
- Meets NSF2, UL and CEC standards
- One-year parts and 90 day labor standard warranty. Additional warranties available
- Holds baskets size, 13.25" x 26.13" x 2.5" or 13.25" x 26.13" x 4.75"

OPTIONS AND ACCESSORIES

- Single tier merchandiser (Unheated)
- Double tier merchandiser (Unheated)
- 16"x35" stainless steel drop tray shelf
- Cash shelf
- Tray slides
 - V-style
 - Tubular bar
- 2" Wire basket (13.25"x26.13"x2.5")
- 4" Wire basket (13.25"x26.13"x4.75")
- Decal package
- Canopy
- Counter protectors/food shields
- Overshelves
- Stainless steel legs

SPECIFICATIONS

Exterior: Exterior body is constructed of 18-gauge stainless steel (stainless models) or 18-gauge galvanized with reinforced laminate facing. 14-gauge galvanized bottom. All exterior side panels are reinforced with overlapping corners and are welded in place. All insert cutouts are reinforced with 14-gauge galvanized channel supports.

Exterior top is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners with fully hemmed nosing on overhanging sides. Stainless steel fully retractable interlocks are installed on opposing corners and locks units into a complete serving system.

Interior: Freezer cold pan is 13" deep one-piece constructed stainless steel tank. Unit is cold wall constructed. The tank is separated from the top by a polycarbonate thermal break and is fully insulated with foamed in place high-density polyurethane foam. A stainless steel access panel is located in bottom of tank,

allowing complete access to the evaporator coil and fan package.

On/Off switch is located on the operator side in a recessed panel with a hinged cover plate. Freezer tank maintains 0° to -5° temperature with lids closed for storage.

Lid: Lids are constructed of stainless steel and are foamed with polyurethane insulation. The lid thickness is 3/4". Lid handle shall be black, recessed ABS. Lids are removable without the use of tools. Lid locks are standard.

Stainless steel lid locking bar is standard. Bar has locking handle at one end and mounts to clips, which are bolted to the top of the cabinet. The locking bar extends the length of the unit. Entire assembly can be removed during the serving period.

Electrical: Electrical connections shall be 120 volt, 60 Hertz, single phase. Unit shall have a 9' long electrical

cord and NEMA 5-15 plug. Cord is standard on the operator right side of equipment. Double cord hook is located on the bottom of the unit.

Freezer: Refrigeration system uses R404A refrigerant and has a self-contained 120 volt, 60 Hertz, single phase hermetically sealed condensing unit. Unit is supplied with an expansion valve.

Casters: Unit is mounted on 5" (12.7cm) diameter swivel polyurethane casters with non-marking tires and plate brakes. Casters are bolted directly to the 14-gauge bottom of the base. Overall height of caster assembly is 6.00" (15.2cm).

Styling: Units are standard with 18-gauge stainless steel exterior. Laminate is an option available at no additional charge. Decal packages and canopies are also available.



980 S. Isabella Road
Mt. Pleasant, MI 48858
www.delfield.com


Phone: 800-733-8948
Fax: 800-669-0619
Email: info@delfield.com

Approval _____


Date _____

SPF-W SHELLAYSPEED™ FREEZER MODULE, 34" HEIGHT, 35" DEPTH


SPF-W - Freezer Module, 34" height, 35" depth




Plan View SPF-42W




Plan View SPF-52W

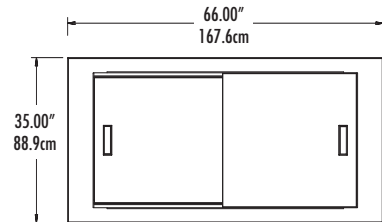


Plan View SPF-66W






Elevation View SPF-42W

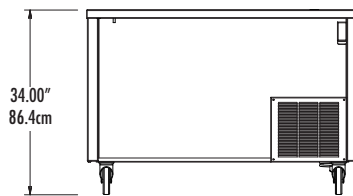


Elevation View SPF-52W

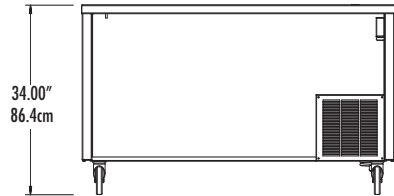

Elevation View SPF-66W

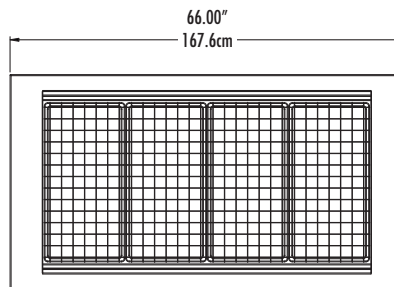

Basket Detail



Right End View
All Models

MECHANICAL DATA:

MODEL NUMBER	TYPE	BASKET CAPACITY	STORAGE CAPACITY	VOLTAGE	AMPS	HP	NEMA PLUG	SHIP WEIGHT
SPF-42W	FREEZER	12 (13.25X26.13X2.5) 6 (13.25X26.13X4.75)	5.44 CU FT.	120	8.0	1/3	5-15P	370
SPF-52W	FREEZER	18 (13.25X26.13X2.5) 9 (13.25X26.13X4.75)	8.11 CU FT.	120	8.0	1/3	5-15P	525
SPF-66W	FREEZER	24 (13.25X26.13X2.5) 12 (13.25X26.13X4.75)	10.78 CU FT.	120	8.0	1/3	5-15P	550

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>