



# 406 & 407 Undercounter Series

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

406 & 407 Undercounter Series

## Models

406	Undercounter refrigerator single section on legs	407	Undercounter freezer single section on legs
406-CA	Undercounter refrigerator single section on casters	407-CA	Undercounter freezer single section on casters



Model 406-CA

## Standard Features

- Features Delfield's exclusive ABS interior. ABS is extremely durable - it won't dent, chip or corrode and is backed by a limited lifetime warranty
- Stainless steel front and sides
- Two epoxy coated wire shelves, standard per unit
- Environmentally friendly R404A refrigerant
- Foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane cuts energy costs
- Black recessed quick grip handle
- Rugged 6" high heavy duty metal legs (models 406 & 407 only). Units with a "CA" suffix are standard on 3" diameter (3.75" ride height) casters
- All units come standard hinged right and may be changed at the factory at no charge. Indicate when order is placed
- 7' cord and plug supplied

## Options & Accessories

- Stainless steel back
- Plastic laminate on front
- Additional shelf
- Stainless steel single-tier overshell
- 3" diameter (3.75" ride height) casters
- Model 409 stacking collar
- Door lock
- 220 volt, 50 Hertz electrical system

## Specifications

**Exterior bottom** shall be heavy-gauge galvanized metal. Exterior ends shall be heavy-gauge stainless steel.

**Base interior** shall be one-piece thermoformed ABS plastic material, with integral shelf supports. ABS interior is backed by a limited lifetime warranty. Base shall be fully insulated with high-density foamed-in-place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane.

**Door** shall have a heavy-gauge stainless steel exterior, with a thermoformed ABS plastic interior liner, and shall be fully insulated with foamed-in-place polyurethane. Door handle shall be black, recessed ABS. Cabinet shall have (2) adjustable epoxy-coated wire shelves installed.

### MODELS 406/406-CA REFRIGERATORS REFRIGERATION SYSTEM

Refrigeration system shall use HFC-404A refrigerant. Compressor shall be 1/5 h.p., with condenser coil and hot gas condensate evaporator mounted on rear of cabinet. Evaporator coil and temperature control shall be mounted on the interior rear wall of the cabinet. Refrigerant flow shall be controlled by a capillary tube. Cabinet shall maintain 36°F to 40°F (2°C to 4°C) interior cabinet temperature.

### MODELS 407/407-CA FREEZERS REFRIGERATION SYSTEM

Freezer system shall use HFC-404A refrigerant. Compressor shall be 1/5 h.p., with condenser coil and hot gas condensate evaporator mounted on rear of cabinet. Evaporator coil and temperature control shall be mounted on the interior rear wall of the cabinet. Refrigerant flow shall be controlled by a capillary tube. Cabinet shall maintain -5°F to 0°F (-21°C to -18°C) interior cabinet temperature.

**Electrical** connections shall be 115 volt, 60 Hertz, single phase. Unit shall have a 7' (2.1m) long electrical cord and NEMA 5-15P plug. Cord and plug shall be located on rear of cabinet, 16" (40.6cm) above floor, 5" from the left side.

### 406/407

Equipment is shipped with loose 6" (15.2cm) high metal legs with black enamel finish unless mounting is specified on original sales order. Exterior top shall be one-piece, heavy-gauge stainless steel with front edge turned down to form nosing and rear edge turned down.

### 406-CA/407-CA

Equipment is shipped with loose 3" diameter (3.75" ride height) casters high casters (two locking and two non-locking) unless mounting is specified on original sales order. Exterior top shall be one-piece, heavy-gauge aluminum with all edges turned down.




980 S. Isabella Rd.  
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981  
Fax: 800-669-0619

www.delfield.com

Enodis®

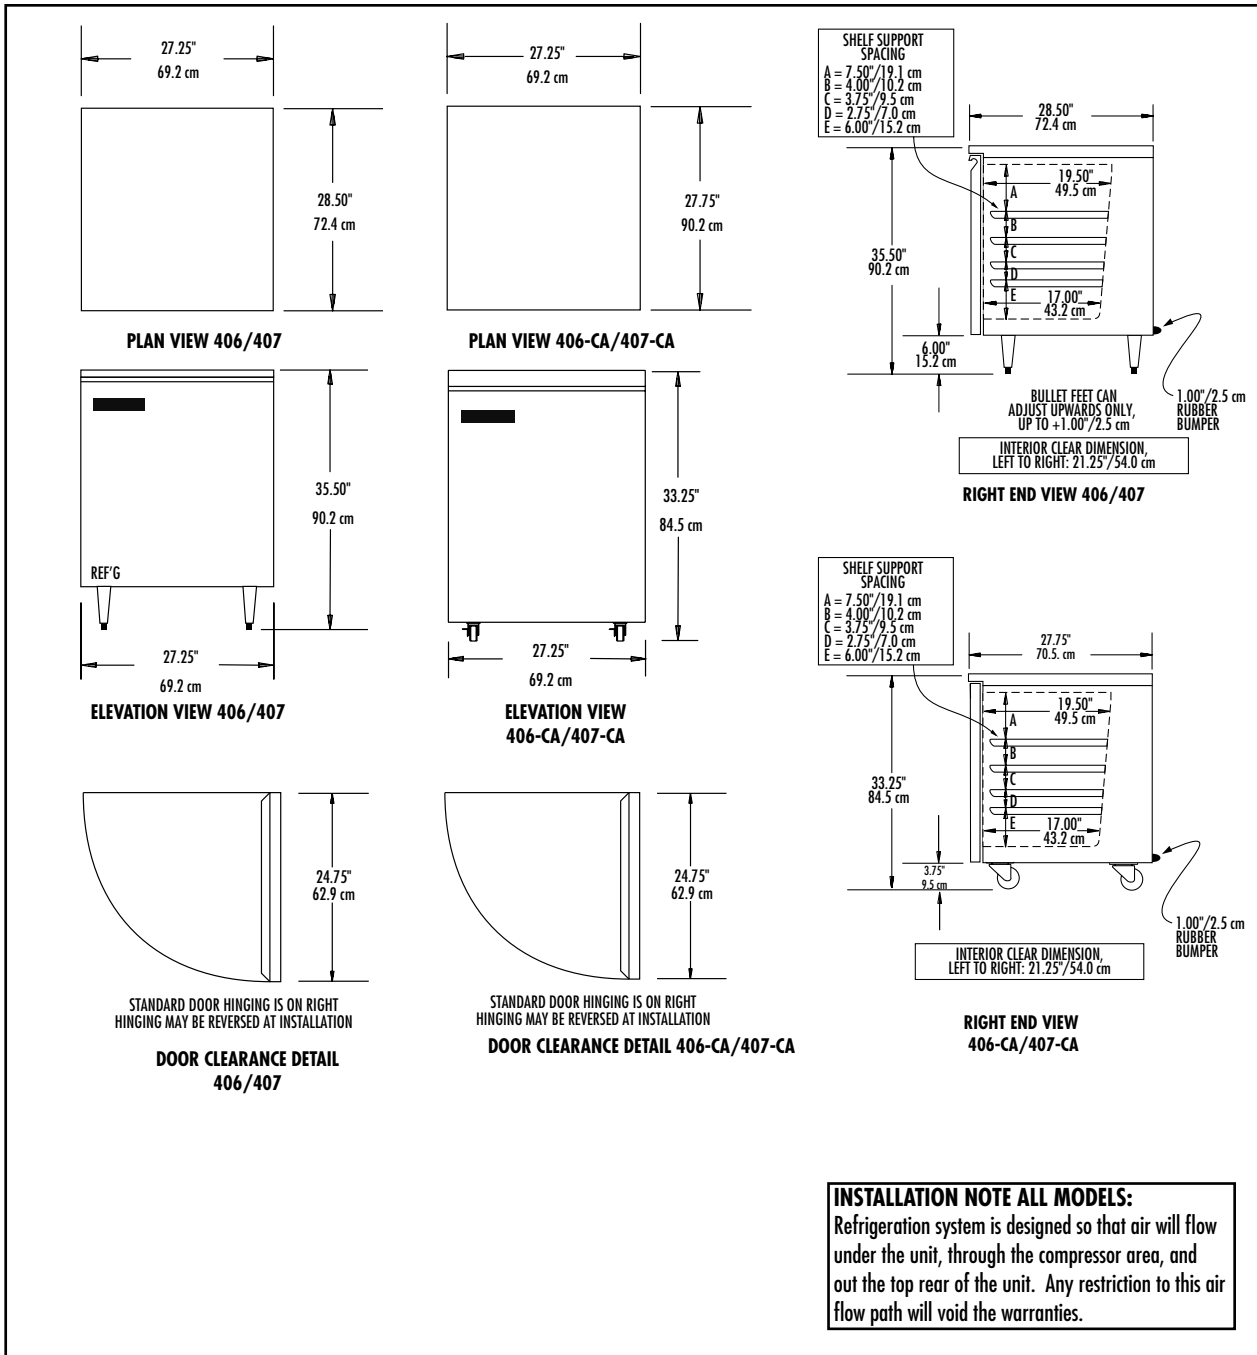

Specifications								
Model	Voltage	Amps	Storage Capacity	Shelf Capacity	H.P.	Ship Weight	NEMA Plug	Energy (KWH)
406	115	7.0	5.7ft <sup>3</sup>	7.2ft <sup>2</sup>	1/5	176lbs (80kg)	5-15P	1.88
407	115	5.8	5.7ft <sup>3</sup>	7.2ft <sup>2</sup>	1/5	176lbs (80kg)	5-15P	3.22
406-CA	115	7.0	5.7ft <sup>3</sup>	7.2ft <sup>2</sup>	1/5	168lbs (76kg)	5-15P	1.88
407-CA	115	5.8	5.7ft <sup>3</sup>	7.2ft <sup>2</sup>	1/5	168lbs (76kg)	5-15P	3.22

Delfield reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.  
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981  
Fax: 800-669-0619  
www.delfield.com

Printed in the U.S.A.  
DS406\_407(CA)  
06/08

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>