


General	Domestic (60Hz)	Part #	Export (50Hz)	Part #
Shape	Rectangular		Rectangular	
Shell Material	Ultralife™ / Granitex™ / Geloy®		Ultralife™ / Granitex™ / Geloy®	
Height	30"		76 cm	
Width	84"		213 cm	
Length	78"		198 cm	
Corner Radii	16"		41 cm	
Seating Capacity	5		5	
Water Capacity	260 gallons		985 Liters	
Dry Weight	670 lbs.		304 kg	
Shipping Weight	670 lbs.		327 kg	
Full Weight	2840 lbs.		1288 kg	
Skirt Material	Wood or synthetic		Wood or synthetic	
Poly Floor	Yes		Yes	
Water System				
Motor Size - Peak (Continuous) HP	4.0 (2.5) HP		3.6 (2.0) HP	
# Pumps/Speed	One / Dual	01562-23A	One / Single	01562-29A
Plumbing Systems	2		2	
Pump Returns	2	01510-559	2	01510-559G
Typhoon Jets	0		0	
VCR Jetâ - Air Adjustable/Directional	0		0	
VCR Jet® - Rotator	2	01510-415	2	01510-415G
VCR Jet® - Mini Rotator	2	01510-445	2	01510-445G
VCR Jet® - Mini Directional	14	01510-444	14	01510-444G
VCR Jet® - Mini Directional in NFJ	4	01510-595	4	01510-595G
VCR Jet® - Euro Roatator	6	01510-493	6	01510-493G
VCR Jetâ - Euro Directional	13	01510-492	13	01510-492G
Ozone Jet	1	01510-201	1	01510-201G
Heater Return Jet	1	01510-275	1	01510-275G
Filters/Coverage	2 / 75 sq. ft.		2 / 6.97 sq. meters	
Water Treatment System	UltraPure™		UltraPure™	
Gate Valves	2	01522-30	2	01522-30
Diverter Valves	1	01522-50	1	01522-50
Floor Drains	1	01510-231	1	01510-231G
Skimmer	8" Weir	01510-137	8" Weir	01510-137G
Electrical System				
Voltage	240		240	
Amperage	40 / 30		16 / 2X16 / 32	
Heater	FastFlo 2.7, 4.0, 5.5	01781-20	FastFlo 2.9 kW	01781-20
Thermostat	Electronic		Electronic	
Light	1 with optional LED	01512-003(O)	1 with optional LED	01512-003(O)
Control System	MSPA-MP-D12	01710-1008	MSPA-MP-D11-CE	01710-1008E
Upper Control	Scrolling Message	01580-0001	Scrolling Message	01580-0001
Auxiliary Upper Control	No		No	
Programmable	Yes		Yes	
Special Features				
Dynamic Massage Sequencer	No		No	
NeckFlex® Jet Pillows	1	01510-598	1	01510-598G
Headrest Pillows	1	01510-593	1	01510-593
Headrest Pillows	1	01510-593	1	01510-593

Note: 1. Subject to change without notice.
2. Reference DOC-1239 REV A.

2005 Seville Architectural Specification

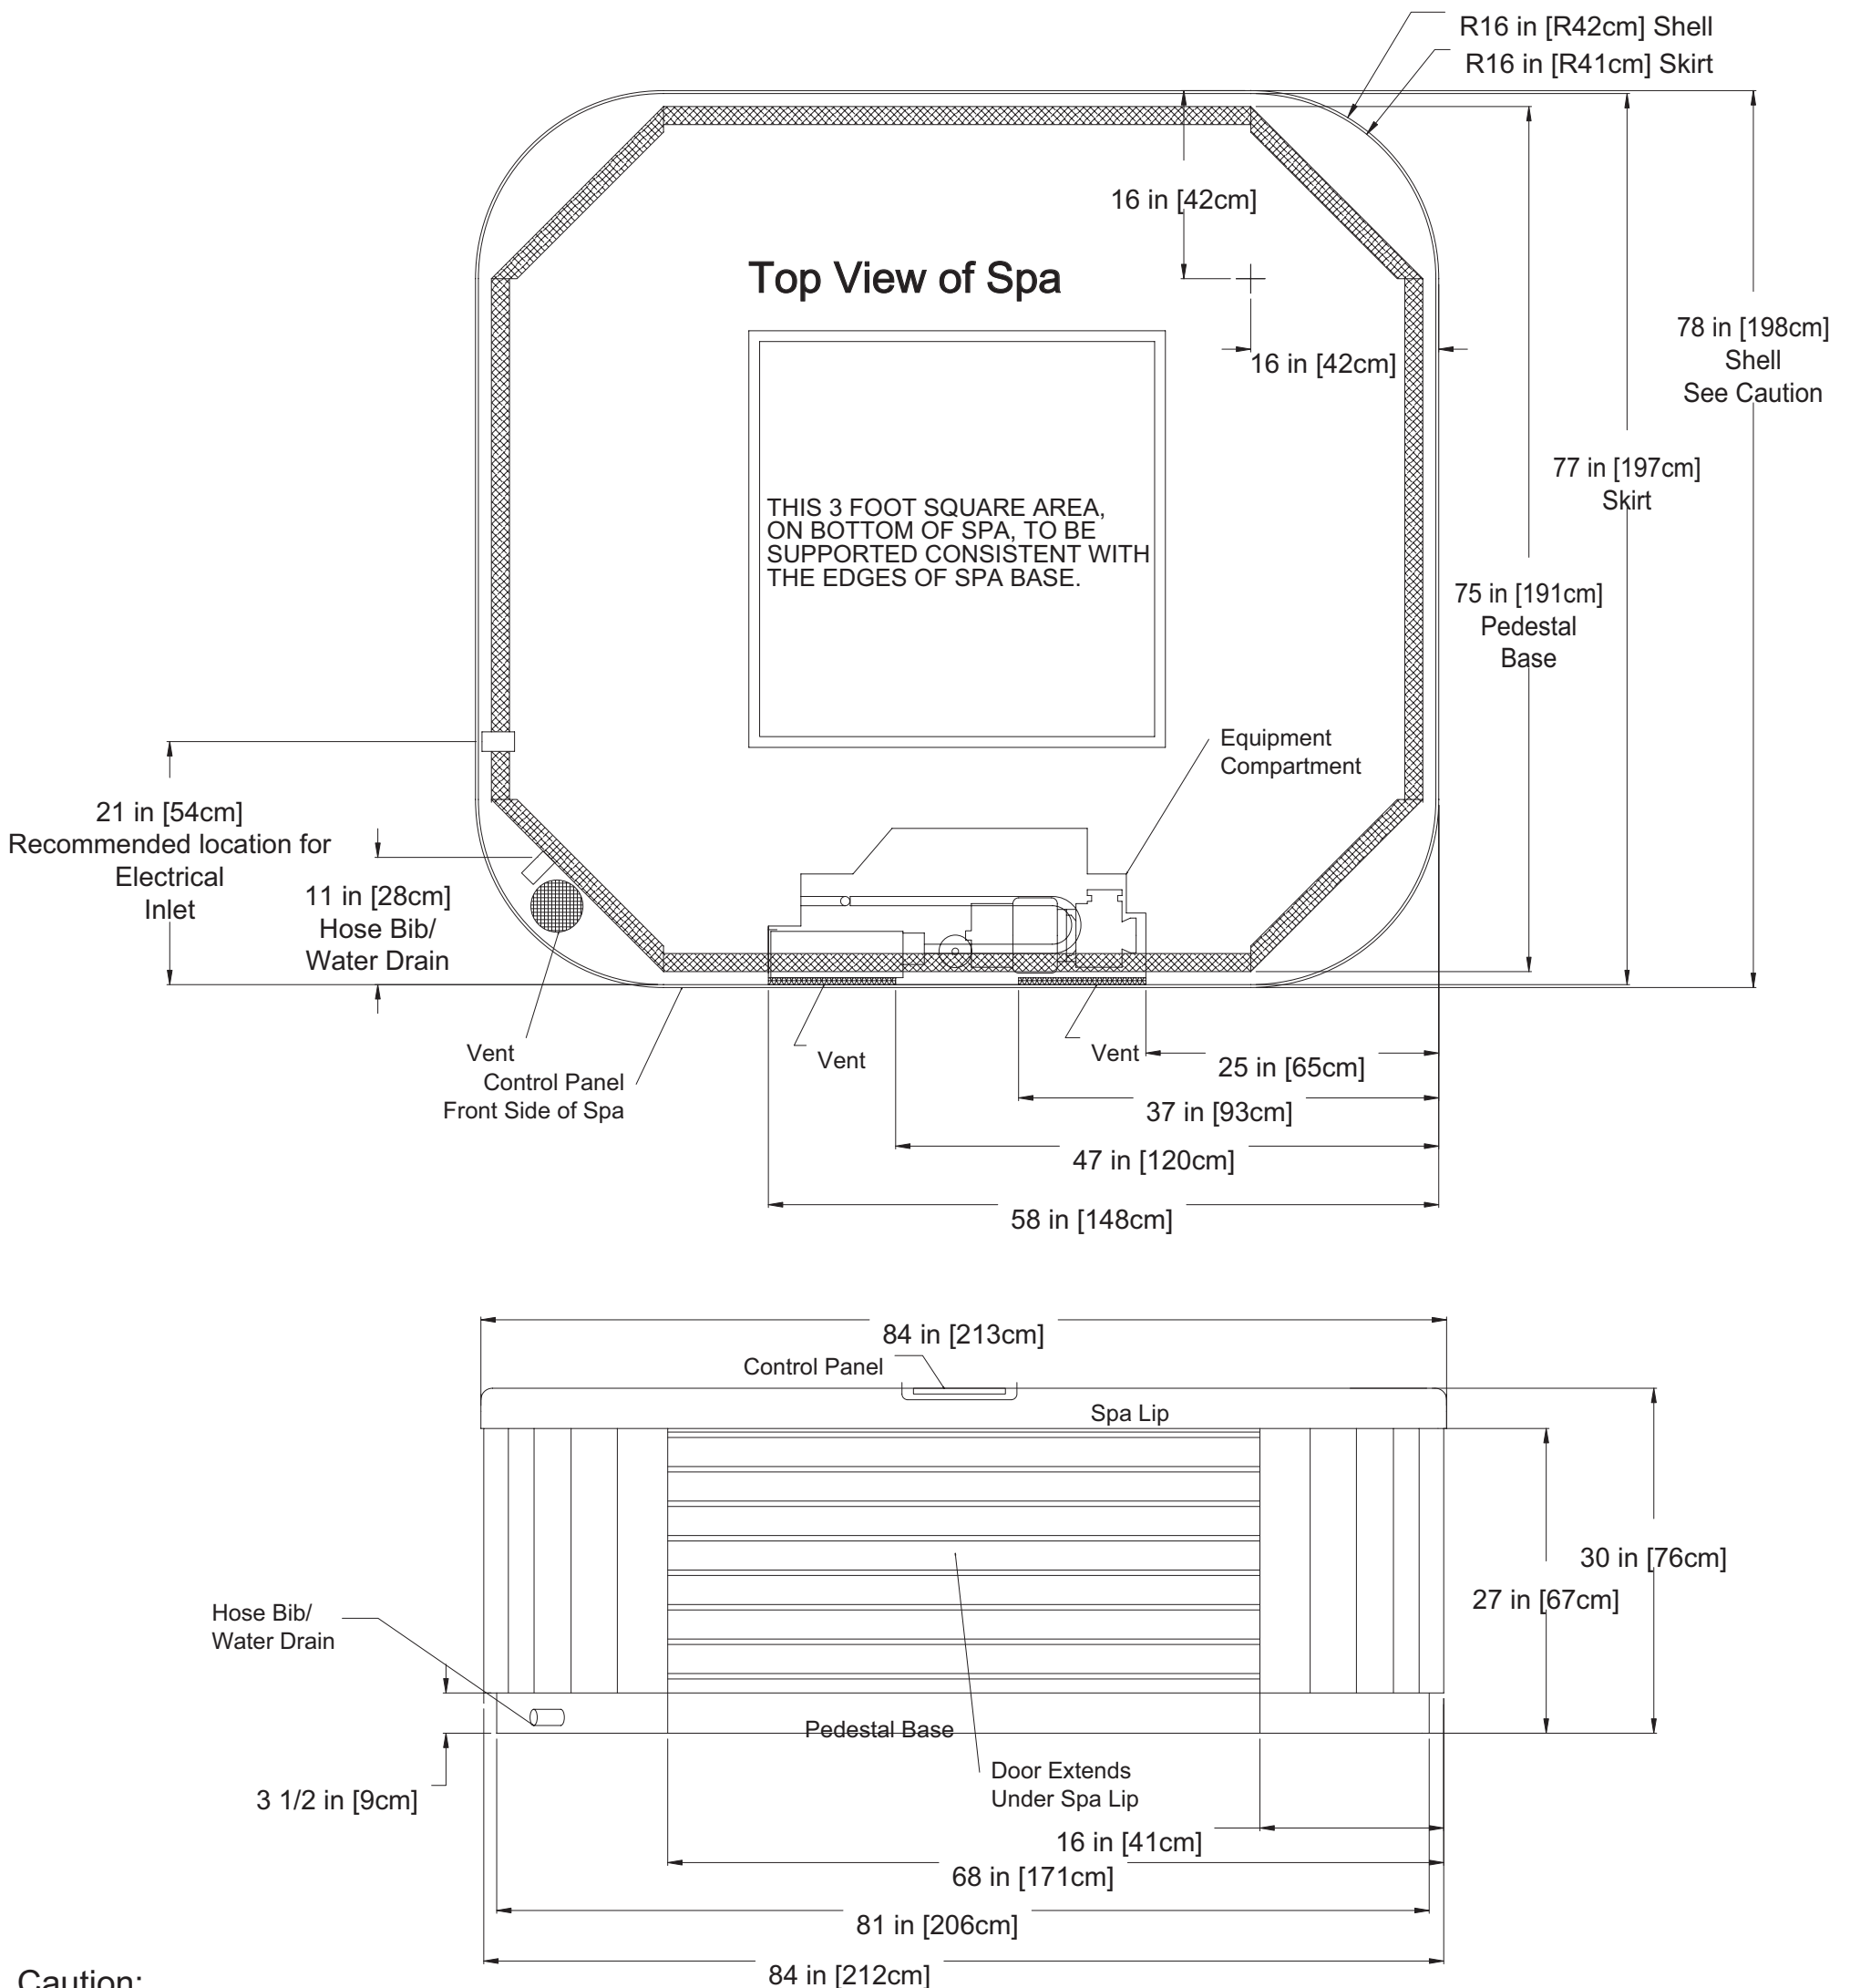

Caution:
 Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.

Note: 1. Subject to change without notice.

2. Engineering specs may differ slightly from brochure.
3. For E-Z lifter installation allow 18" (45.72cm) clearances on the backside of the spa.
4. Alternative cabinets may add significant weight. Ask your dealer for exact details

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>