
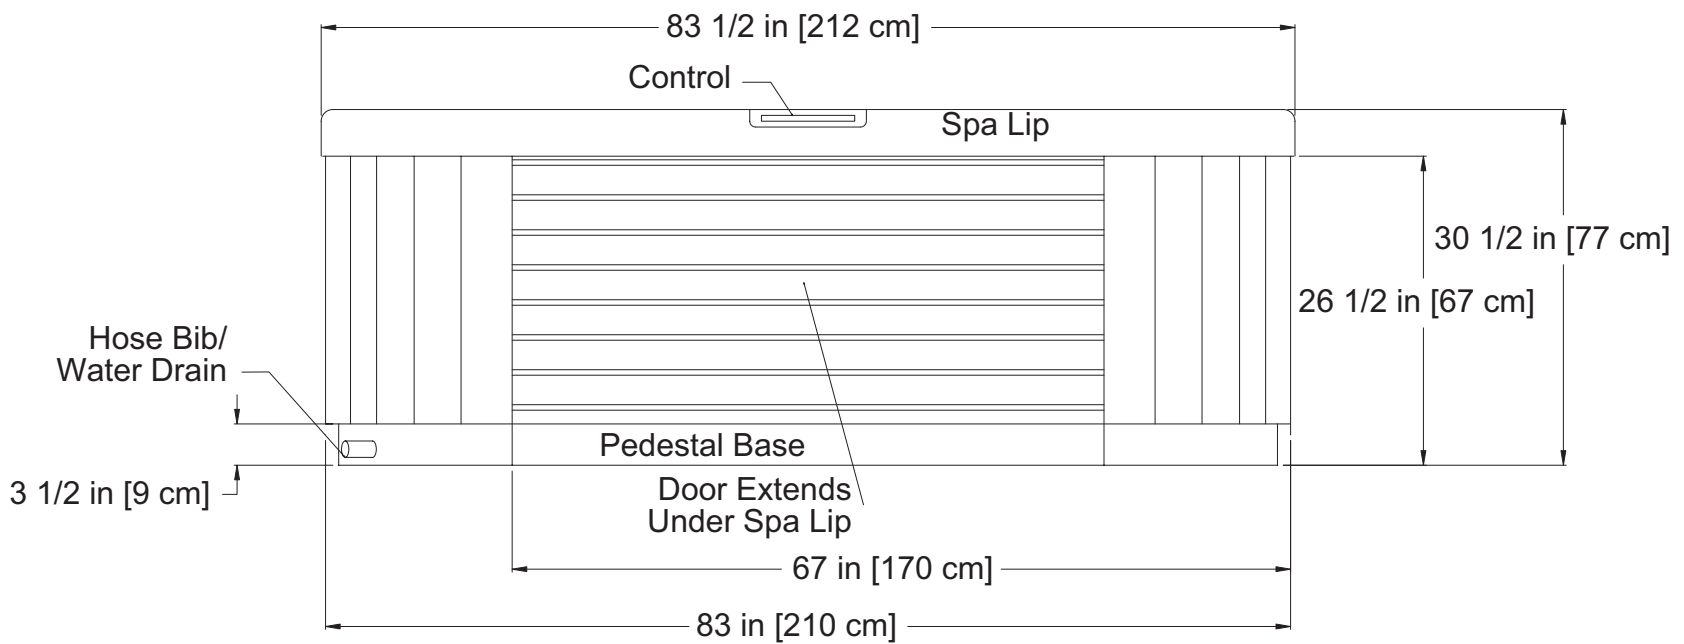


General	Domestic (60Hz)	Part #	Export (50Hz)	Part #
Shape	Rectangular		Rectangular	
	Ultralife™ / Granitex™		Ultralife™ / Granitex™	
Shell Material	/ Gelay®		/ Gelay®	
Height	30 ½ in.		77 cm	
Width	83 ½ in.		212 cm	
Length	66 ½ in.		169 cm	
Corner Radii	16 in.		41 cm	
Seating Capacity	3+		3+	
Water Capacity	200 Gallons		757 Liters	
Dry Weight	640 lbs		291 kg	
Shipping Weight	640 lbs		313 kg	
Full Weight	2310 lbs		1048 kg	
Skirt Material	Wood or Synthetic		Wood or Synthetic	
Poly Floor	Yes		Yes	
Water System				
Motor Size – Peak(Continuous) HP	4.0 (2.5) HP		3.6 (2.0) HP	
# Pumps/Speed	One / Dual	01562-23A	One / single	01562-29A
Plumbing Systems	1		1	
Pump Returns	2	01510-559	2	01510-559G
Typhoon Jets	0		0	
VCR Jet® - Air Adjustable/Directional	4	01510-418	4	01510-418G
VCR Jet® - Rotator	7	01510-415	7	01510-415G
VCR Jet® - Mini Rotator	2	01510-445	2	01510-445G
VCR Jet® - Mini Directional	6	01510-444	6	01510-444G
VCR Jet® - Mini Directional in NFJ	4	01510-595	4	01510-595G
VCR Jet® - Euro Directional	0		0	
Ozone Jet	1	01510-201	1	01510-201G
Heater Return Jet	1	01510-275	1	01510-275G
Filters/Coverage	2 / 75 sq. ft.	(2) 01561-00	2 / 6.97 sq. meters	(2) 01561-00
Water Treatment System	Ultra Pure™		Ultra Pure™	
Gate Valves	2	01522-30	2	01522-30
Diverter Valves	0		0	
Floor Drains	1	01510-231	1	01510-231G
Skimmer	8" Weir	01510-137	20 cm Weir	01510-137G
Electrical System				
Voltage	240		240	
Amperage	40/30		1X16 / 2X16 / 1X32	
Heater	FastFlo 2.7,4.0,5.5 kW	01781-20	FastFlo 2.9 kW	01781-20
Thermostat	Electronic		Electronic	
Light	1 with optional LED	01512-003 (O)	1 with optional LED	01512-003 (O)
Control System	MSPA-MP-D12	01710-1008	MSPA-MP-D11-CE	01710-1008E
Upper Control	Scrolling Message Center	01580-0001	Scrolling Message Center	01580-0001
Auxiliary Upper Control	No		No	
Programmable	Yes		Yes	
Special Features				
Dynamic Massage Sequencer w/ control panel	Yes	PCA 01710-1001 UCP 01560-1005	Yes	PCA 01710-1001 UCP 01560-1005
NeckFlex® Jet Pillows	1	01510-598	1	01510-598
Headrest Pillows	2	01510-593	2	01510-593
Cup Holders	2		2	
Tactile Therapy	Floor pedestal		Floor pedestal	

Note: 1. Subject to change without notice.
2. Reference DOC-1237 REV A.

2005 Triad II Architectural Specification

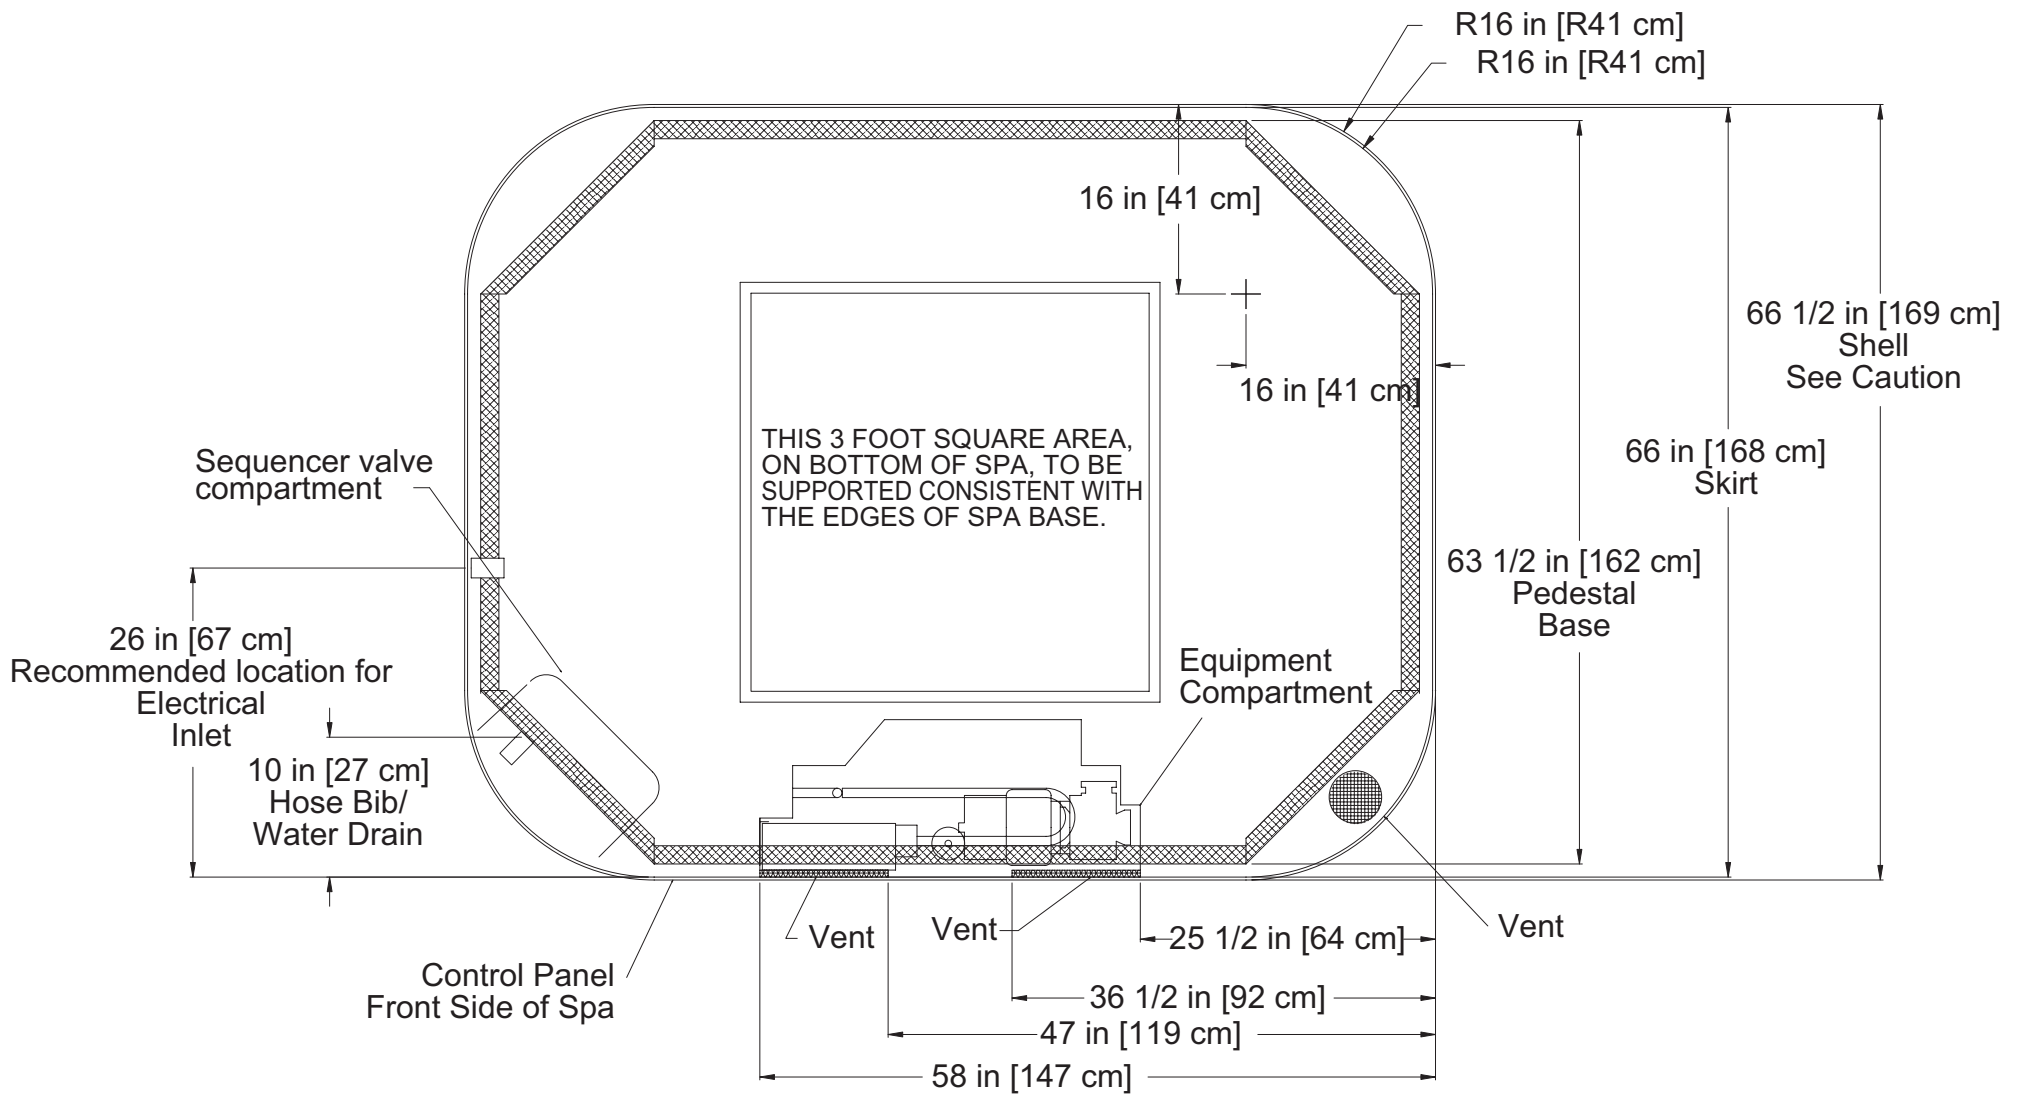

Note: 1. Subject to change without notice.

2. Engineering specs may differ slightly from brochure.
3. For E-Z lifter installation allow 18" (45.7cm) clearance on the backside of the spa.
4. Alternative cabinets may add significant weight. Ask your dealer for exact details
5. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment(drill from the inside compartment out).

Caution:
Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>