



# SPECIFICATIONS MQV2364e

## FEATURES

- Full-range, 3-way system
- 2x 15-in LF; 2x 10-in horn-loaded MF; 2-in exit Neodymium HF
- 60° x 40° beamwidth
- Horizontally configured to create vertical arrays

## DESCRIPTION

A 3-way, full-range system in a vented trapezoidal enclosure. Includes dual, slot-loaded 15-in woofers, dual, horn-loaded 10-in MF cones with Radial Phase Plug™, and a 2-in exit/3-in diaphragm Neodymium compression driver. The MF and HF horns provide a nominal 60° x 40° beamwidth. An internal passive crossover with jumpers on the input panel allows user selection of either bi-amplified or passive operation. In either case digital signal processing is required to achieve specified performance. The enclosure features a comprehensive system of 3/8"-16 threaded suspension points.

## APPLICATION

The MQV2364e combines the MQ Series LF/MF/HF components into a full-range, single-enclosure loudspeaker. It is horizontally configured for arraying in vertical columns. This arrangement is typically used in sports arenas and other venues where the array must address wide, vertical audience angles. Dual LF and MF components produce greater output than MQV1300 series products. The MF/HF horns in the MQV2364e feature a rigid but well-damped construction using wood veneer backed by structural foam. A no-compromise design means the mid and high frequency horns are truly large enough to provide optimal pattern control throughout each passband.

### Application Usage: Install

|                         |             |          |
|-------------------------|-------------|----------|
| Houses of Worship       | Auditoriums | Theatres |
| Performing Arts Centers | Arenas      | Stadiums |

## PERFORMANCE

### Frequency Response

|        |                 |
|--------|-----------------|
| ±3 dB  | 72 Hz to 15 kHz |
| -10 dB | 50 Hz           |

### Axial Sensitivity (dB SPL, 1 Watt @ 1m)

|       |     |
|-------|-----|
| LF    | 97  |
| MF/HF | 108 |
| MF    | 110 |
| HF    | 108 |

### Impedance (Ohms)

|       |   |
|-------|---|
| LF    | 4 |
| MF/HF | 4 |
| MF    | 4 |
| HF    | 8 |

### Power Handling, AES Standard (Watts)

|       |      |
|-------|------|
| LF    | 1200 |
| MF/HF | 800  |
| MF    | 800  |
| HF    | 150  |



### Calculated Maximum Output (dB SPL @ 1m)

|                      |         |
|----------------------|---------|
| LF Peak/Long Term    | 134/128 |
| MF/HF Peak/Long Term | 140/134 |
| MF Peak/Long Term    | 142/136 |
| HF Peak/Long Term    | 136/130 |

### Nominal Coverage Angle, -6 dB Points (degrees)

|            |    |
|------------|----|
| Horizontal | 60 |
| Vertical   | 40 |

### Recommended High-Pass Frequency

|              |       |
|--------------|-------|
| 24 dB/Octave | 50 Hz |
|--------------|-------|

## PHYSICAL

|                     |  |
|---------------------|--|
| LF Subsystem        | 2x 15-in, vented   |
| MF Subsystem        | 2x 10-in horn loaded cone, Radial Phase Plug™                                |
| HF Subsystem        | 1x 2-in exit/3-in voice coil compression driver on constant directivity horn |
| Configuration       | Three-way, full range  |
| Powering            | Bi- or Tri-amplified   |
| Enclosure Materials | Exterior grade Baltic birch plywood  |
| Finish              | Wear-resistant textured black paint  |
| Connectors          | Terminal barrier strip   |
| Suspension Hardware | 16x 3/8"-16 threaded mounting points (4 each on top, bottom and sides)       |
| Grille              | Powder coated perforated steel   |

### Dimensions

|                 | inches                | millimeters |
|-----------------|-----------------------|-------------|
| Height (front)  | 36.71                 | 932         |
| Height (rear)   | 25.36                 | 644         |
| Width           | 56.25                 | 1429        |
| Depth           | 25.59                 | 650         |
| Trapezoid Angle | 12.5 Degrees per Side |             |

### Weights


|                 | pounds | kilograms |
|-----------------|--------|-----------|
| Net Weight      | 300    | 136.4     |
| Shipping Weight | 330    | 150.0     |





# SPECIFICATIONS MQV2364e

## DIMENSIONAL DRAWING

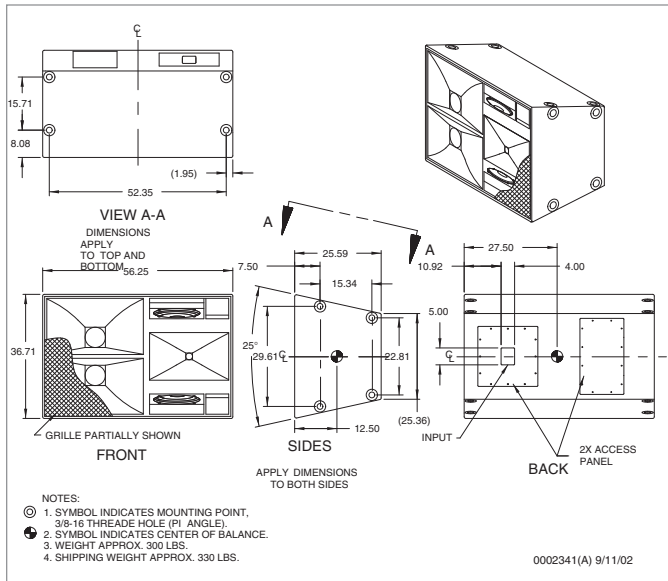

Manufacturing tolerances are +/-0.13 and +/-1°

## A & E SPECIFICATIONS

The 3-way full-range loudspeaker shall incorporate two 15-in slot-loaded woofers, two 10-in MF cones with Radial Phase Plug™, and a 2-in exit/3-in diaphragm HF compression driver. The MF and HF devices shall be loaded on horns that provide a nominal 60° x 40° beamwidth. An internal passive crossover network shall offer either bi- or tri-amplified operation, configurable via jumpers on the input panel.

System frequency response shall vary no more than 63 dB from 70 Hz to 15 kHz measured on axis. The LF section shall produce a sound pressure level of 97 dB SPL on axis at 1 meter with a power input of 1 watt, and shall be capable of producing a peak output of 134 dB SPL on axis at 1 meter. The LF section shall handle 1200 watts of amplifier power (AES Standard) and shall have a nominal impedance of 4 ohms.

When operated in bi-amplified mode, the MF/HF section shall produce a sound pressure level of 108 dB SPL on axis at 1 meter with a power input of 1 watt, and shall be capable of producing a peak output of 140 dB SPL on axis at 1 meter. The MF/HF section shall handle 800 watts of amplifier power (AES Standard) and shall have a nominal impedance of 4 ohms.

When operated in tri-amplified mode, the MF section shall produce a sound pressure level of 110 dB SPL on axis at 1 meter with a power input of 1 watt, and shall be capable of producing a peak output of 142 dB SPL on axis at 1 meter. The MF section shall handle 800 watts of amplifier power (AES Standard) and shall have a nominal impedance of 4 ohms. The HF section shall produce a sound pressure level of 108 dB SPL on axis at 1 meter with a power input of 1 watt, and shall be capable of producing a peak output of 136 dB SPL on axis at 1 meter. The HF section shall handle 150 watts of amplifier power (AES Standard) and shall have a nominal impedance of 8 ohms.

The loudspeaker enclosure shall be trapezoidal in shape. It shall be constructed of exterior grade Baltic birch plywood and shall employ extensive internal bracing. It shall be finished in wear-resistant textured black paint. Input connectors shall be a terminal strip. A total of 16x 3/8"-16 threaded mounting/suspension points (4 each top, bottom, and sides) shall be provided. The front of the loudspeaker shall be covered with a powder coated perforated steel grille.

The 3-way full-range loudspeaker shall be the EAW model MQV2364e.



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>