


# LC-180AR: Portable High Brightness Projector for Classrooms, Training Rooms, and Churches.

## KEY FEATURES:

- Powerful, 200 ANSI Lumens image brightness from a 200 Watt long-life Metal Halide lamp.
- New improved dichroics transmit more light for a brighter image.
- Projects up to a 200" diagonal picture.
- High resolution polysilicon LCD panels with 544,410 pixels.
- Portable, easy-to-carry. New BNC input, external speaker output.

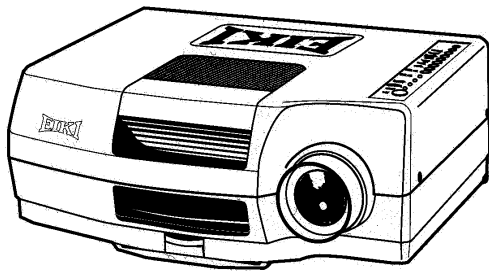

## OTHER IMPORTANT FEATURES:

- Adjustable, short-throw zoom/focus lens.
- IR Wireless Remote Control. Digital on-screen menu display.
- Built-in 3-watt speaker and amplifier. Low profile design for tabletop, desktop or ceiling mounting.
- Full audio and video inputs. Connects to VCR's, video disk players, video cameras and TV tuners.
- Optional Accessories: Soft Travel Case with wheels and telescoping handle. Soft Carry Bag. Hard Shipping Case Ceiling Mount.

## LC-180AR SPECIFICATIONS:

Screen Brightness	.....200 ANSI Lumens
Illumination Uniformity	.....30%
Size of Color Palette	.....16.7 Million
Contrast Ratio	.....100 :1
Horizontal Resolution	.....550 TV Lines
Projection Lamp	.....200-Watt, Long-Life Metal-Halide
Light - RGB Distribution	.....Dichroic Mirror System
Imaging System	.....1.3" PolySilicon TFT Panels x 3
Screen Pixels	.....789x230 = 181,470
Total Pixels	.....181,470 x 3 = 544,410
Lens Type	.....Manual Zoom and Focus
Image Min. - Max. (Diag.)	.....30" - 200" diagonal
Image Min. - Max. (Wide)	.....2.0' - 13.3' (.61m - 4.06m)
Throw - Min. - Max.	.....5.2' - 34.8'(1.59m - 10.62m)
Width-to-Throw Factor	.....Approx. 2.0 - 2.6
Elevation: Front	.....Variable (Front Legs)
Keystone Elimination	.....Offset, Ratio (Bottom:Top) 1:4
Scanning	.....Auto: H Sync. 15-734kHz
Image Orientation	.....Normal, Reversed-Inverted
Remote Control	.....Infrared
Video Standards	.....NTSC
Video Channels	.....1

## SPECIFICATIONS (cont.)

Video Input	.....RCAx 1, BNC x 1, S-Video x 1
Video Output	.....RCAx 1
Video Audio Input	.....RCA x 2 (L/R)
Audio - Amplifier	.....3 Watt Mono (10% THD)
Audio - Built-in Speaker	.....5 x 9 cm x 1
Audio - Audio Monitor	.....RCA x 2 (L/R)
Audio - External Speaker Amplifier	.....3 Watt Stereo (10% THD)
Audio - External Speaker Jack	.....1x Mini (Stereo)
Fan Noise Level	.....Less than 51.0 dB
Size (HxWxD)	.....6.2" x 16.8" x 15" (158 x 430 x 385 mm)
Weight	.....19.6 Lb. (8.9kg)
Power Requirements	.....120VAC, 50/60 Hz
Power Consumption	.....260 Watts
Power Cord	.....10' (3M) Type 3, Detachable
Safety Compliances	.....UL Listed
Warranty - Projector	.....1 Year Parts & Labor
Warranty - Projection Lamp	.....90 Days Or 2,000 Hours, Whichever Occurs First.

Specifications subject to change without notice.

©1997 EIKI International, Inc. Printed in the USA. 1/28/98

# EIKI

Key to better communications.

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Phone: 800-242-3454; Fax: 800-457-3454, E-mail: eikiusa@ibm.net  
EIKI CANADA, 17036 Highway 12, P.O. Box 156, Midland, ON L4R 4K8 Tel: 800-563-3454, Fax: 800-567-4069 E-mail: eikicda@eiki.ca  
Visit our World Wide Web site: <http://www.eiki.ca>

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>