


LC-4300: Your Best Value in Portable Multimedia.

KEY FEATURES:

- High-impact picture with 450 Lumens brightness.
- Lightweight, easy to carry... the ideal portable PC companion.
- New RS-232 control cable and software permits remote control of the projector from the computer.
- Three polysilicon LCD panels with 921,600 pixels total, 550 TV lines resolution and 16.7 million colors.
- Built-in preset keystone elimination makes it perfect for desktop presentations.

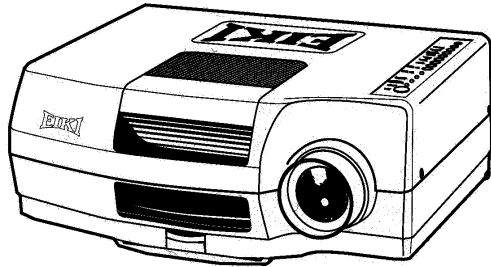

OTHER IMPORTANT FEATURES:

- Short-throw lens projects image sizes from 30 to 300 diagonal.
- High light output, long-life 200 -Watt, Metal Halide lamp.
- Instant rear screen projection button.
- Digital on-screen menu display.
- Complete all-in-one system with built-in 3-watt speaker/amplifier.

LC-4300 SPECIFICATIONS:

Screen Brightness	450 ANSI Lumens
Illumination Uniformity	90%
Size of Color Palette	16.7 Million
Contrast Ratio	100 :1
Horizontal Resolution	550 TV Lines
Projection Lamp	200-Watt, Long-Life Metal-Halide
Light - RGB Distribution	Dichroic Mirror System
Imaging System	3 x 1.3" polysilicon TFT panels
Screen Pixels	640x480 = 307,200
Total Pixels	(307,200 x 3) = 921,600
Lens Type	Manual Zoom and Focus
Image Min. - Max. (Diag.)	.30" - 300" diagonal
Image Min. - Max. (Wide)	.2' - 20' (1.59m - 15.93m)
Throw - Min. - Max.	.5.2' - 52.3' (1.59m - 15.93m)
Width-to-Throw Factor	Approx. 2.0 - 2.6
Elevation: Front	.8 degrees
Keystone Elimination	Built-In Offset, Ratio (Bottom:Top) 1:9
Scanning	Auto: H Sync. 15-37.9kHz; V Sync. 50-70kHz
Image Orientation	Normal, Reversed, Inverted
Remote Control	Infrared
Computer Standards	VGA, EGA, CGA, MAC
Computer Channels	1
Computer Inputs	Supplied VGA& MAC Cable to HDB 15 x 1

SPECIFICATIONS (cont.)

Computer Monitor Out	HDB 15 x 1
Computer Audio In	RCAX 2 (L/R)
Video Standards	NTSC/PAL/SECAM/NTSC 4.43
Video Channels	1
Video Input	RCAX 1, BNC x 1, S-Video x 1
Video Output	RCAX 1
Video Audio Input	RCAX 2
Audio - Amplifier	3 Watts RMS mono (THD 10%)
Audio - Built-in Speaker	.2" x 3.5" (5cm x 9cm) x 1
Audio - Audio Monitor	RCAX 2 (L/R)
Audio - Speaker Output	MiniJack x 1
Size (HxWxD)	.6.2" x 16.8" x 15" (158 x 430 x 385 mm)
Weight	21.8 Lb. (9.9 kg)
Power Requirements	120V 50/60 Hz
Power Consumption	285 Watts
Power Cord	10' (3M) Type 3, Detachable
Safety Compliances	ULListed
Warranty - Projector	1 Year Parts & Labor
Warranty - Projection Lamp	90 Days Or 2,000 Hours, Whichever Occurs First.

Specifications subject to change without notice.

©1997 EIKI International, Inc. Printed in the USA. 1/8/97

EIKI

Key to better communications.

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Phone: 800-242-3454; Fax: 800-457-3454, E-mail: eikiusa@ibm.net
EIKI CANADA, 355 Cranston Cres., P.O. Box 156, Midland, ON L4R 4K8 Tel: 800-563-3454, Fax: 800-567-4069 E-mail: eikicda@eiki.ca
Visit our World Wide Web site: <http://www.eiki.ca>

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>