


LC-5300: Portable Big Screen Multimedia.

KEY FEATURES:

- 350 ANSI Lumens for brilliant multimedia graphics and full motion video.
- New 200-Watt, longer-life Metal Halide lamp.
- Long-throw lens delivers sharp, clear images from distances up to 85.7 feet.
- Advanced TFT active matrix LCD panels with 921,600 pixels, 550 TV lines resolution and 16.7 million colors.
- Preconverged LCD technology for fast set-up and simple operation.

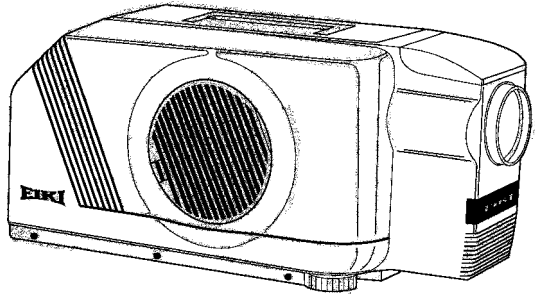

OTHER IMPORTANT FEATURES:

- Backlit wireless remote control. Full electronic zoom, focus and keystone correction. Instant rear screen projection button.
- Connects to any standard video source. NTSC, NTSC 4.43, PAL and SECAM color standards compatible.
- Included Accessories: VGA and MAC II Cables, Lens Cap, Owner's Manual, Dust Cover, Remote Control, AC Power Cord.
- Optional Accessories: Carry case, shipping case and ceiling mount, SCART adaptor.

LC-5300 SPECIFICATIONS:

Screen Brightness	.350 ANSI Lumens
Illumination Uniformity	.50%
Size of Color Palette	16.7 Million
Contrast Ratio	100 : 1
Horizontal Resolution	550 TV Lines
Projection Lamp	200-Watt, Long-Life Metal-Halide
Light - RGB Distribution	Dichroic Mirror System
Imaging System	3.1" Amorphous TFT panels x 3
Screen Pixels	640x480 = 307,200
Total Pixels	307,200 x 3 = 921,600
Lens Type	Power Zoom and Focus
Image Min. - Max. (Diag.)	.20" - 300" diagonal
Image Min. - Max. (Wide)	1.3' - 20' (.41m - 6.10m)
Throw - Min. - Max.	.5.7' - 85.7' (1.74m - 26.3m)
Width-to-Throw Factor	Approx. 2.1 - 4.3
Elevation: Front	.5 ° Up/Down
Keystone Elimination	Electronic (Compression) 5 ° Up/Down
Scanning	H Sync. 15-37.9kHz; V Sync. 49.5-74.4Hz
Image Orientation	Normal, Reversed
Remote Control	Infrared
Computer Standards	VGA, EGA, CGA, MAC
Computer Channels	1
Computer Inputs	.DB25 x 1

SPECIFICATIONS (cont.)

Computer Monitor Out	."Y" Input Cable
Computer Audio In	.RCA x 2 (L/R)
Video Standards	.NTSC/PAL/SECAM/NTSC 4.43
Video Channels	.2
Video Input	.AV1: 1 x RCA, 1 x BNC, 1 x S-Video AV2: 1 x SCART
Video Output	.RCAx 1
Video Audio Input	.RCAx 2 (L/R)
Audio - Amplifier	.3 Watts RMS Mono (THD 10%)
Audio - Built-in Speaker	.2" x 3.5" (5cm x 9 cm x 1)
Audio - Audio Monitor	.RCAx 2 (L/R)
Size (HxWxD)	.9.9" x 10.5" x 21.7" (253 x 268 x 550 mm)
Weight	.30.15 Lb. (13.7kg)
Power Requirements	.120 VAC, 50/60 Hz
Power Consumption	.285 Watts
Power Cord	.10' (3M) Type 3, Detachable
Safety Compliances	.UL Listed
Warranty - Projector	.1 Year Parts & Labor
Warranty - Projection Lamp	.90 Days Or 2,000 Hours, Whichever Occurs First.

Specifications subject to change without notice.

©1997 Eiki International, Inc. Printed in the USA. 1/28/98

EIKI

̄-Key to better communications.

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Phone: 800-242-3454; Fax: 800-457-3454, E-mail: eikiusa@ibm.net
EIKI CANADA, 17036 Highway 12, P.O. Box 156, Midland, ON L4R 4K8 Tel: 800-563-3454, Fax: 800-567-4069 E-mail: eikicda@eiki.ca
Visit our World Wide Web site: <http://www.eiki.ca>

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>