


LC-6200: Bright, Big Screen Multimedia.

KEY FEATURES:

- 1000 ANSI LUMENS light output at 70% uniformity for brilliant images--even in normal light!
- High-performance lens with power zoom and focus projects up to a 450" diagonal picture from distances up to 86.7'.
- 640 x 480 pixel resolution for VGA & MAC. Also, handles 800 x 600 VGA in compressed mode.
- Variable Optical Keystone Correction can reduce or eliminate off axis image distortion.
- Bonus! IR50 wireless remote mouse control and real-time Presentation F/X software.

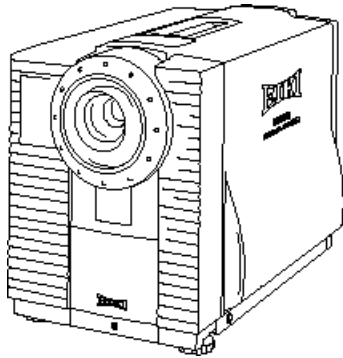

LC-6200 SPECIFICATIONS:

Screen Brightness	1000 ANSI Lumens
Illumination Uniformity	70%
Size of Color Palette	16.7 Million
Contrast Ratio	100 :1
Horizontal Resolution	550 TV Lines
Projection Lamp	400-Watt, Long-Life Metal-Halide
Light - RGB Distribution	Dichroic Mirror System
Imaging System	3.1" Amorphous TFT Panels x 3
Screen Pixels	640 x 480 = 307,200
Total Pixels	307,200 x 3 = 921,600
Lens Type	Power Zoom and Focus
Image Min. - Max. (Diag.)	20" - 450" diagonal
Image Min. - Max. (Wide)	1.3' - 30' (0.41m - 9.14m)
Throw - Min. - Max.	3.8' - 86.7' (1.17m - 26.42m)
Width-to-Throw Factor	Approx. 1.8-2.9
Elevation: Front/Rear	Variable up to 5 Degrees Up
Keystone Elimination	Variable Up or Down, max. degrees 3.13, max ratio (B:T) 2.3:1/1:2.3
Scanning	Auto: H Sync. 15-37.9 Hz; V Sync. 49:1 - 74.4 Hz.
Image Orientation	Normal, Reversed
Remote Control	IR Projector & Mouse Control
Computer Standards	VGA, EGA, CGA, MAC13

OTHER IMPORTANT FEATURES:

- High light output, long-life 400-Watt Metal Halide lamp.
- Accepts most video input: NTSC, NTSC 4.43, PAL and SECAM.
- Multi-Voltage (100-240VAC) and Multi-Cycle (50/60 Hz).
- Included Accessories: Power Cord, Lens Cap, Dust Cover, Owner's Manual, VGA "Y" input cable and MAC "Y" input cable, VGA & MAC terminators, IR Projector Remote Control & Batteries, "RS-232" Computer Control Cable and Software, Bonus: IR50 Remote Mouse & Presentation F/X.
- Optional Accessories: Padded Dust Cover, Hard Shipping Case with wheels, 30 ft. (9M) - Wired Remote Cord.

SPECIFICATIONS (cont.)

Special Capabilities	800 x 600 SVGA, compressed
Computer Channels	1
Computer Input	DB25 x 1, 5 BNC (RGBHV)
Computer Monitor Out	"Y" Input Cable
Computer Audio Input	RCA x 2 (L/R)
Video Standards	NTSC/PAL/SECAM/NTSC 4.43
Video Channels	2
Video Input	AV1: RCAx1, BNC x 1, S-Video x 1, AV2: 1 x RCA
Video Output	RCA x 1
Video Audio Input	AV1: RCAx 2 (L/R), AV2: RCA x 2 (L/R)
Audio - Amplifier	3 Watts RMS Mono
Audio - Built-in Speaker	2" x 3.5" (5cm x 9cm) x 1
Audio - Audio Monitor	RCA x 2 (L/R)
Size (HxWxD)	15.5" x 13.3" x 22" (394 x 337.5 x 594 mm)
Weight	53.9 Lb. (23.5 kg)
Power Requirements	AC, 120-240 50/60 Hz
Power Consumption	630 Watts
Power Cord	10' (3M) Type 3, Detachable
Safety Compliances	UL Listed
Warranty - Projector	1 Year Parts & Labor
Warranty - Lamp	3 Months

Specifications subject to change without notice.

©1997 Eiki International, Inc. Printed in the USA. 4/16/97

EIKI

Ä-Key to better communications.

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Phone: 800-242-3454; Fax: 800-457-3454, E-mail: eikiusa@ibm.net
EIKI CANADA, 355 Cranston Cres., P.O. Box 156, Midland, ON L4R 4K8 Tel: 800-563-3454, Fax: 800-567-4069 E-mail: eikicda@eiki.ca
Visit our World Wide Web site: <http://www.eiki.ca>

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>