


# LC-6210: Bright, Big Screen Multimedia.

## KEY FEATURES:

- 850 ANSI LUMENS light output at 70% uniformity for brilliant images--even in normal light!
- High-performance lens with power zoom and focus projects up to a 300" diagonal picture from distances up to 85.7'.
- 640 x 480 pixel resolution for VGA & MAC. Also, handles 800 x 600 VGA in compressed mode.
- Variable Optical Keystone Correction can reduce or eliminate off axis image distortion.
- Bonus! IR50 wireless remote mouse control and real-time Presentation F/X software.

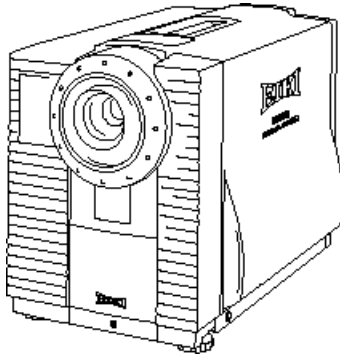

## LC-6210 SPECIFICATIONS:

Screen Brightness	.850 ANSI Lumens
Illumination Uniformity	.70%
Size of Color Palette	.16.7 Million
Contrast Ratio	.100 : 1
Horizontal Resolution	.550 TV Lines
Projection Lamp	.400-Watt, Long-Life Metal-Halide
Light - RGB Distribution	.Dichroic Mirror System
Imaging System	.3.1" Amorphous TFT Panels x 3
Screen Pixels	.640 x 480 = 307,200
Total Pixels	.307,200 x 3 = 921,600
Lens Type	.Power Zoom and Focus
Image Min. - Max. (Diag.)	.20" - 300"
Image Min. - Max. (Wide)	.1.3' - 20' (0.41m - 6.10m)
Throw - Min. - Max.	.5.7' - 85.7' (1.75m - 26.13m)
Width-to-Throw Factor	.Approx. 2.1 - 4.3
Elevation: Front/Rear	.Variable up to 5 Degrees Up
Keystone Elimination	.Variable Up or Down, max. degrees 3.13, max ratio (B:T) 2.3:1/1:2.3
Image Orientation	.Normal, Reversed
Remote Control	.IR Projector & Mouse Control
Computer Standards	.VGA, EGA, CGA, MAC 13

## OTHER IMPORTANT FEATURES:

- High light output, long-life 400-Watt Metal Halide lamp.
- Accepts most video input: NTSC, NTSC 4.43, PAL and SECAM.
- Multi-Voltage (100-240VAC) and Multi-Cycle (50/60 Hz).
- Included Accessories: Power Cord, Lens Cap, Dust Cover, Owner's Manual, VGA"Y" input cable and MAC "Y" input cable, VGA & MAC terminators, IR Projector Remote Control & Batteries, "RS-232" Computer Control Cable and Software, Bonus: IR50 Remote Mouse & Presentation F/X.
- Optional Accessories: Padded Dust Cover, Hard Shipping Case with wheels, 30 ft. (9M) Wired Remote Cord.

## SPECIFICATIONS (cont.)

Special Capabilities:	.800 x 600 SVGA, compressed
Computer Channels	.1
Computer Inputs	.DB25 x 1, 5 BNC (RGBHV)
Computer Monitor Out	. "Y" Input Cable
Computer Audio Inputs	.RCA x 2 (L/R)
Video Standards	.NTSC/PAL/SECAM/NTSC 4.43
Video Channels	.2
Video Input	.AV1: RCAx1, BNC x 1, S-Video x 1, AV2: 1 x RCA
Video Output	.RCA x 1
Video Audio Input	.AV1: RCAx 2 (L/R), AV2: RCA x 2 (L/R)
Audio - Amplifier	.3 Watts RMS Mono
Audio - Built-in Speaker	.2" x 3.5" (5cm x 9cm) x 1
Audio - Audio Monitor	.RCAx 2 (L/R)
Size (HxWxD)	.15.5" x 13.3" x 22" (394 x 337.5 x 594 mm)
Weight	.51.8Lb. (23.5 kg)
Power Requirements	.AC, 120-240 50/60 Hz
Power Consumption	.630 Watts
Power Cord	.10' (3M) Type 3, Detachable
Safety Compliances	.UL Listed
Warranty - Projector	.1 Year Parts & Labor
Warranty - Lamp	.3 Months

Specifications subject to change without notice.

©1997 EIKI International, Inc. Printed in the USA. 4/16/97

# EIKI

Ā-Key to better communications.

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Phone: 800-242-3454; Fax: 800-457-3454, E-mail: eikiusa@ibm.net  
EIKI CANADA, 355 Cranston Cres., P.O. Box 156, Midland, ON L4R 4K8 Tel: 800-563-3454, Fax: 800-567-4069 E-mail: eikicda@eiki.ca  
Visit our World Wide Web site: <http://www.eiki.ca>

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>