


#### KEY FEATURES

- Projects 1280 x 1024 pixels, for real SXGA / MAC21 resolution.
- 2300 ANSI Lumens bright at 85% uniformity with a 400:1 contrast ratio.
- Projects images up to 40' wide (615" diagonal) over distances up to 101'.
- 200 MHz dot clock for compatibility with most workstations.
- Smart data compression/expansion: compatibility up to UXGA / down to VGA.
- Digital Connectivity: DFP graphics adapter & data input, Panel Link™ technology
- HDTV Ready: 1080i, 720p and 1035i compatible.
- Progressive video scaling resizes the video image beautifully.
- Accepts Composite, Component, and S-Video Input. Displays 4:3 and 16:9.
- Multi-Format Video: NTSC / PAL / SECAM / NTSC 4.43 / PAL-M.
- Power Lens Shift offsets the image in both directions: up & down.
- Optional Telephoto, Midrange and WideAngle Lenses.
- 3 Year\* Projector Warranty! 3 Month\* Lamp Warranty!

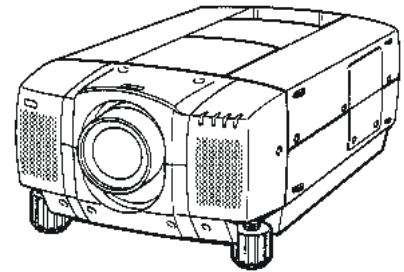

#### OTHER IMPORTANT FEATURES

- Included Accessories: Owner's Manual. AC Power Cord, Lens Cap. PCI bus Graphics Adapter. DFP cable. VGA cable.
- MAC Adapter. Wireless Remote Control with Mouse and Laser Pointer & 2 x AA batteries. Mouse cables for PS/2, Serial Port, ADB
- Port. Wired Remote Control & 2 x AA batteries & 5' (1.5m) cord.
- Optional Accessories: Replacement Lamp. MAC Monitor cable. PCMCIA DFP adapter. 10m DFP cable. 13W3 Input / Output Adapter. Telephoto, Midrange and WideAngle Lenses. Soft Carry Bag with wheels and telescoping handle. Hard Shipping Case with wheels and telescoping handle. Ceiling Mount and Post & Plate.

#### SPECIFICATIONS:

Screen Brightness ..... 2300 ANSI Lumens  
 Illumination Uniformity ..... 85%  
 Size of Color Palette ..... 16.7 Million  
 Contrast Ratio ..... 400:1 (ANSI 100:1)  
 Horizontal Resolution ..... 800 TV Lines  
 Projection Lamp ..... 400 Watt Metal Halide  
 Estimated Lamp Life ..... 750 Hrs.  
 Recommended Lamp Replacement ..... 600 Hrs.  
 Imaging System ..... 1.8" PolySilicon active matrix TFT Panels x3  
 Screen Pixels ..... 1280 x 1024 in stripe configuration  
 Total Pixels ..... 3,935,216 ((1280 x 1024) x 3)  
 Lens Type ..... Power Zoom and Focus  
 Lens Speed & Focal Length .. f:2.0~2.3; 2.98~3.84 in. (75.7~97.5mm)  
 Lens Ratios ..... Zoom Max:Min: 1.29:1; Throw:Width: 2.1~2.7:1  
 Image Diagonal ..... 40~615 in.  
 Image Width ..... 2.6 ~ 40 ft. (0.8 ~ 12.2 m.)  
 Throw Distance ..... 5.3 ~ 101 ft. (1.6 ~ 30.9 m.)  
 Front Elevation / Maximum Tilt ..... up to 4° up  
 Anti Keystone ..... Power Lens Shift, Ratio (T:B) 10:0~0:10  
 Scanning Frequency ..... Auto: H Sync. 15-100Hz; V Sync. 50-100Hz  
 Dot Clock ..... 200 MHz  
 Image Orientation ..... Normal, Reversed (projector does not invert)  
 Local Control ..... Full Function  
 Remote Projector & Mouse Ctrl ... Wireless (Infra Red x 1) w/ Pointer  
 Mouse Control Ports ..... Two Sets: 12 Pin DIN x 1, USB port x 1  
 Remote Projector Control ..... Wireless (Infra Red) / Wired x 1  
 Projector Control Ports ..... Mini Stereo x1  
 RS-232 Control Port ..... (Serial Port type) Dsub 9 x 1  
 Computer Native Resolution ..... 1280 x 1024 (SXGA/MAC 21)  
 Computer Compatibility .... UXGA, SXGA, XGA, SVGA, VGA & MAC

Computer: Higher Resolution Displayed panned or Smart compressed  
 Computer: Lower Resolution ..... Displayed normal or Smart expanded  
 Computer: Channels ..... 2  
 Computer: Input: Channel 1 ..... HDB15 x 1 & MDR20 (DFP Port) x 1  
 Computer: Input: Channel 2 ..... 5 BNC (R,G,B,H,V) x 1  
 Computer: Monitor Out ..... HDB 15 x1  
 Computer: Audio Input ..... Two Sets: RCA x 2 (Stereo)  
 Video: Standards ..... NTSC / PAL / SECAM / NTSC 4.43 / PAL-M  
 Video: Formats Supported ..... Normal 4:3 and Wide Screen 16:9  
 Video: Image Sizing ..... Progressive Video Scaling  
 Video: Channels ..... 2  
 Video: Systems ..... Composite, Component, S-Video  
 Video: Input Connections ..... Two Sets: BNC x 3, S-Video x 1  
 Video: Audio: Input ..... Two Sets: Stereo: RCA x 2 (L&R)  
 Video: Monitor Output Systems ..... Composite, Component, S-Video  
 Video: Audio Monitor Output ..... Stereo: RCA x 2  
 Audio Output: Amplifier ..... 3 Watts RMS (each L&R) Stereo  
 Audio Output: Speakers ..... 2 x 3.5 in. (5x9cm) x 2  
 Fan Noise ..... 45 dB  
 Size (H x W x D) ..... 9.2x15.4x22.9 in. (233.6x390x581.5 mm.)  
 Weight ..... 39.3 lbs. (17.8 kg)  
 Packaged Size (H x W x D) .. 16.3x21.1x28.8 in. (412x534x730 mm.)  
 Packaged Weight ..... 50.7 lbs. (23 kg)  
 Power Requirements ..... 100-120/200~240V AC, 50/60Hz  
 Power Consumption / Heat .. 630 Watts / 2,150 BTU/hr. (542 KC/hr.)  
 Power Cord ..... 10' (3M) Type 3, Detachable  
 Safety Compliance ..... UL Listed  
 User Maintenance ..... Clean Air Filter, Replace Lamp  
 Warranty Projector 3 Yr / 6000 Hr \*(Parts & Labor to Correct Defects)  
 Warranty Lamp 3 Mo/500 Hr \*(Pro-Rata Replacement of Failed Lamp)  
 ..... \* Whichever occurs first

#### CAUTION

Laser Radiation - Do not stare into beam. Max. Output: 1 m W. Wave Length: 660+/- 20mm. Class II Laser Product.  
 This warning is required by the US FDA regarding the laser pointer in the remote control of this projector.

Specifications subject to change without notice. ©1999 Eiki International, Inc. Issued September 1, 1999,

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630, USA. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: infousa@eiki.com  
 In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: infocanada@eiki.com  
 Fax-on-Demand: (Toll Free) 877-345-4329 Visit our World Wide Web site: <http://www.eiki.com>

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>