




LC-X1100

XGA BOARDROOM Projector

Key Features: Model LC-X1100

4100 ANSI Lumens bright, at 90%+ uniformity, and a 800:1 contrast ratio.
 Extremely quiet operation: fan noise as low as 35 dBA in Eco-Mode.
 Network connectivity with the optional Pj-to NetDirector Interface.
 3 panel LCD imaging for rich, color saturated visuals.
 Weighs only 18.6 lb. Compact and easy to store.
 True XGA resolution. SXGA, XGA, SVGA, VGA and MAC compatible.
 Smart data compression / expansion, and video scaling.
 Power zoom and focus. Power lens shift. Digital keystone correction.
 Wireless/wired remote with mouse and laser pointer. 7xpower digiyal zoom.
 Accepts DVD & HDTV Component Video, plus Composite, and S-Video Input.
 Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
 3 Year* Projector Warranty!

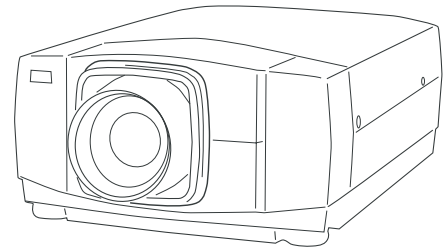

LC-X1100

INCLUDED ACCESSORIES: Owner's manual. AC Power Cord. Lens Cover. VGA-type Computer Input Cable. MAC Adapter. Wireless/Wired Remote with Mouse Control and Laser Pointer. 2xAAA batteries and 1.5M Wired Remote Cable. Mouse Cable for Computer, PS/2, Serial/RS-232 ADB Port. Dust Cover.

OPTIONAL ACCESSORIES: Replacement Lamp. DVI Cable. Soft Carry Bag. Luggage Style Carry Case with Wheels and Telescoping Handle. ATA-Style Shipping Case with Wheels and Telescoping Handle. Wideangle and Telephoto Lenses. Ceiling Mount, Ceiling Post and Plate. 33' (10M) Mouse Extension Cable. Pj-to-NetDirector Interface.

SPECIFICATIONS: Model LC-X1100

| | | | |
|----------------------------------|------------------------------------------------------------------|-------------------------------------------------------------------|----------------------------------------------------|
| Screen Brightness | 4100 ANSI Lumens /3300 in Eco-Mode | Video: System Compatibility | NTSC/PAL/SECAM/NTSC 4.43/PAL-M/N |
| Illumination Uniformity | 90%+ | Video: HDTV Compatibility | 480i/p, 575i/p, 720p, 1035i, 1080i-50/60 |
| Size of Color Palette | 16.7 Million | Video: Formats Supported | 4:3 and 16:9 |
| Contrast Ratio | 800:1 (Full ON/OFF) | Video: Image Resizing | Video Scaling Technology |
| Horizontal Resolution | 800 TV Lines (HDTV) | Video: Systems | Composite, S-Video,Component (Y,Pb/Cb,Pr/Cr) |
| Projection Lamp | 275 Watts NSH / Operates at 220 in Eco-Mode | Input Channels | |
| Estimated Lamp Life | 2,000 Hours | Inputs: | 3 |
| Imaging System | 1.30 Polysilicon active matrix TFT Panels x 3 | 1. Computer: | HD15 x 1, DVI-D x 1 |
| Screen Pixels | 1024 x 768 in stripe configuration | | Audio: Stereo: MiniStereo x 1 (L x R) |
| Total Pixels | 2,359,296 ((1024 x 768) x 3) | 2a. either Computer: | BNC x 5 (RGBHV) |
| Lens Type | Power Zoom & Focus | 2b. or Video: | Composite,S-Video,Component(Y,Pb/Cb,Pr/Cr) |
| Lens Specs | Speed: f: 1.7~2.0; FL: 1.90~2.47 in. (48.2~62.6mm) | plus, Audio: Stereo: | |
| Lens Ratios | Zoom Max:Min: 1.3:1; Throw: Width: 1.8:1~2.36:1 | 3. Video: RCAx3(Composite,S-Video/Component:Y,Pb/Cb,Pr/Cr)S-Video | x1 |
| Image Diagonal | 31~400 in. (78.8~1016 cm) | | Audio: RCA x 2 (L&R Stereo) |
| Image Width | 2.07~26.7 ft. (0.63~8.2m.) | Audio: Amplifier | Stereo: 2 Watts RMS |
| Throw Distance | 3.7~62.9 ft. (1.13~19.17m.) | Audio: Built in Speakers | Stereo: 2 in. (5 cm.) x 2 |
| Front Elevation | up to 10.5;up | Fan Noise | 39.5 dBA / 35 dBA in Eco-Mode |
| Anti Krystone | Power Lens Shift, Ratio (Top:Bottom) 10:0~1:1 | Size (HxWxD) | 6.6 x 12.6 x 18.5 in. (168 x 319 x 470 mm.) |
| Vertical Keystone Correction | Digital: up tp 40; up or down | Weight | 18.6 lb. (8.4kg.) |
| Horizontal Keystone Correction | Digital up to 10; left or right | Packaged Size (HxWxD) | 13.3 x 17.8 x 24.9in. (337 x 450 x 630mm.) |
| Scanning Frequency | Auto: H Sync. 15-100 kHz; V Sync. 50-100 Hz | Packaged Weight | 28.5 lb. (12.9 kg.) |
| Dot Clock | 160 MHz | Power Requirements | 100 - 240V AC, 50/60 Hz |
| Image Orientation | Normal, Reversed, Inverted | Power Consumption | 380 W / 310 W in Eco-Mode |
| Local Control / Power Management | Full Function / Auto Shut-off | Heat | 1297 BTU/hr.(327 Kcal./hr.) 1058 (267) in Eco-Mode |
| Remote Projector & Mouse Control | Wireless / Wired x 1 w/ Laser Pointer | Power Cord | 100" (3M) T type 3, Detachable |
| Ports: | Mouse: USB x 1, Control: 8-pin DIN x 1, Wired RC: MiniStereo x 1 | Safety Compliance | UL Listed |
| Computer: Native Resolution | 1024x768(XGA) | Security Facilities | Kensington Security Slot |
| Computer: Compatibility | SXGA, XGA, SVGA, VGA and MAC | Operating Temperature | 41~95;F (5~35;C) |
| Computer: Formats | 1280 x 1024, 1024 x 768, 800 x 600, 6640 x 480 | User Maintenance | Clean Air Filter, Replace Lamp |
| Computer: Imaging Sizing | Normal, or Smart Compressed or Expanded | Warranty Projector | 3 Yr./6000 hr. *(Parts/Labor to Correct Defects) |
| | | Warranty Lamp | 90 days (Failed Lamp Replaced Pro-Rata) |
| | | | * which occurs first |

This warning is required by the US FDA and pertains to the laser pointer in the wireless remote control of this projector.

Caution! Laser Radiation – Do not stare into beam. Max. Output: 1 mW. Wave Length: 650 +/- 20 nm. Class II Laser Product.

Specifications subject to change without notice. ©2002 Eiki International, Inc. Issued June 12, 2002.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com

In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: canada@eiki.com

Fax-on-Demand: (Toll Free) 877-345-4329 Visit our World Wide Web site: <http://www.eiki.com>

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>