


### KEY FEATURES

- Projects true XGA / MAC19: 1024 X 768 pixels with all the clarity of 3 panel LCD technology.
- 1300 ANSI Lumens Brightness. Up to a 300" diagonal (20' wide) picture.
- Compact 14.6 lb. Design fits easily into airline overhead compartments.
- Smart data compression / expansion, and video scaling technology.
- Displays higher resolutions with panning, or smart compression.
- Displays lower resolutions normal, or smart expanded.
- 160 MHz dot clock, for compatibility with many workstations.
- Wireless remote with mouse control and power zoom and focus.
- 16 Increment Digital Zoom magnifies the image, not the pixels
- 3 Year\* Projector Warranty! 6 Month\* Lamp Warranty!

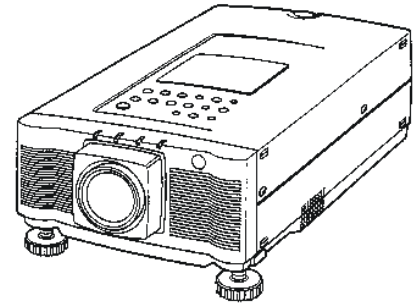

### OTHER IMPORTANT FEATURES

- UHP (Ultra High Performance) long-life 150 Watt lamp.
- Composite and S-Video Input in NTSC, PAL, SECAM / NTSC 4.43 / PAL-M .
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- International Power: 100~240V AC, 50 / 60 Hz (automatic).
- Included Accessories – Owner's Manual. AC Power Cord. Lens Cover. VGA-type Computer Input Cable. MAC Adapter. Wireless Remote Control With Mouse & Batteries (AA x 2). Mouse cables for PS/2, Serial Port, ADB Port. Dust Cover.
- Optional Accessories – Replacement Lamp. MAC Monitor Cable. Luggage-Style ("wheelie") Carrying Case with Wheels, Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate. 33' (10m) Mouse Extension Cable. Long Throw Lenses (require installation by a qualified technician).

### SPECIFICATIONS:

Screen Brightness ..... 1300 ANSI Lumens  
 Illumination Uniformity ..... 85%  
 Size of Color Palette ..... 16.7 Million  
 Contrast Ratio ..... 300:1 (ANSI 100:1)  
 Horizontal Resolution ..... 800 TV Lines  
 Projection Lamp ..... 150 Watt UHP  
 Estimated Lamp Life..... 2,000 Hrs.  
 Recommended Lamp Replacement..... 1,000 Hrs  
 Imaging System ..... 1.3" PolySilicon TFT Panels x3  
 Screen Pixels ..... 1024 x 768  
 Total Pixels ..... 2,359,296 ((1024 x 768) x 3)  
 Lens Type ..... 1:1.3 ratio Power Zoom and Focus  
 Lens Speed & Focal Length.. f:1.8~2.1; 1.91~2.48 in. (48.4~62.8mm)  
 Lens Protection..... Auto Lens Retract  
 Image Diagonal ..... 30~300 in.  
 Image Width ..... 2.0 ~ 20 ft. (0.6 ~ 6.1 m.)  
 Throw Distance ..... 4.6 ~ 46.1 ft. (1.4 ~ 14.04 m.)  
 Width-to-Throw Factor ..... 1.78 ~ 2.3  
 Front Elevation / Maximum Tilt ..... up to 6° up (One Touch)  
 Anti Keystone ..... Preset Lens Offset, Ratio (T:B) 19:1  
 Scanning Frequency .... Auto: H Sync. 15-100Hz; V Sync. 50-100Hz  
 Dot Clock ..... 160 MHz  
 Image Orientation ..... Normal, Reversed, Inverted  
 Local Control ..... Full Function  
 Remote Control ..... Wireless (IR x 1) & Mouse x 1  
 Mouse Control Port ..... 12 Pin DIN x 2  
 RS-232 Control Port ..... On mouse Control Port #2: 12 Pin DIN x 1  
 Computer Native Resolution ..... XGA/MAC19 (1024 x 768)  
 Computer: Compatibility ..... SXGA, XGA, SVGA, VGA & MAC  
 Computer: Formats. 1280x1024, 1024x768, 832x624, 800x600, 640x480

Computer: Higher Resolution Displayed panned or Smart compressed  
 Computer: Lower Resolution .....Displayed normal or Smart expanded  
 Computer: Channels.....2  
 Computer: Inputs..... HDB15 x 2  
 Computer: Monitor Out ..... HDB15 x1  
 Computer: Audio In ..... Stereo: MiniStereo x 2  
 Video: Compatibility ..... NTSC / PAL / SECAM / NTSC 4.43 / PAL-M  
 Video: Formats Supported ..... Normal 4:3 and Wide Screen 16:9  
 Video: Image Sizing ..... Video Scaling Technology  
 Video: Channels ..... 1  
 Video: Inputs ..... Composite: RCA x 1, S-Video x 1  
 Video: Output .....Composite: RCA x 1  
 Video: Audio Input ..... RCA x 2 (L&R)  
 Audio Amplifier .....Stereo: 2 Watts RMS each (L&R) 3 Watt peak  
 Audio: Built In Speakers .....Stereo: 1.57 x 2.75 in. (4x7cm) x 2  
 Audio: External Speaker Output .....Stereo: MiniStereo x 1  
 Fan Noise ..... Approximately 45 dB  
 Size (H x W x D) ..... 5.8x10.8x16.3 in. (145.5x272x412.5 mm.)  
 Weight ..... 14.6 lbs. (6.6 kg)  
 Packaged Size (H x W x D) .. 12.5x15.9x22.2 in. (317x404x564 mm.)  
 Packaged Weight ..... 22.1 lbs. (10.0 kg)  
 Power Requirements ..... 100~120V / 200~240V AC, 50/60Hz  
 Power Consumption / Heat ..... 250 Watts / 854 BTU/hr.  
 Power Cord ..... 10' (3M) Type 3, Detachable  
 Safety Compliance ..... UL Listed  
 User Maintenance ..... Clean Air Filter, Replace Lamp  
 Warranty Projector 3 Yr / 6000 Hr \*(Parts & Labor to Correct Defects)  
 Warranty Lamp 6 Mo/1000 Hr \*(Pro-Rata Replacement of Failed Lamp)  
 ..... \* Whichever occurs first

Specifications subject to change without notice. ©1999 Eiki International, Inc. Issued September 1, 1999,

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630, USA. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: infousa@eiki.com  
 In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: infocanada@eiki.com  
 Fax-on-Demand: (Toll Free) 877-345-4329 Visit our World Wide Web site: <http://www.eiki.com>

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>